


416 Distributed Systems

RAID, Oct 18 2018


Thanks to Greg Ganger and Remzi Arapaci-Dusseau
for slides

Outline

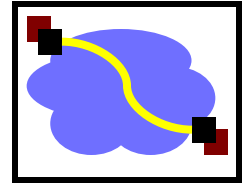



- Using multiple disks
 - Why have multiple disks?
 - problem and approaches
- RAID levels and performance

Motivation: Why use multiple disks?




- Capacity
 - More disks allows us to store more data
- Performance
 - Access multiple disks in parallel
 - Each disk can be working on independent read or write
 - Overlap seek and rotational positioning time for all
- Reliability
 - Recover from disk (or single sector) failures
 - Will need to store multiple copies of data to recover
- So, what is the simplest arrangement?

Just a bunch of disks (JBOD)

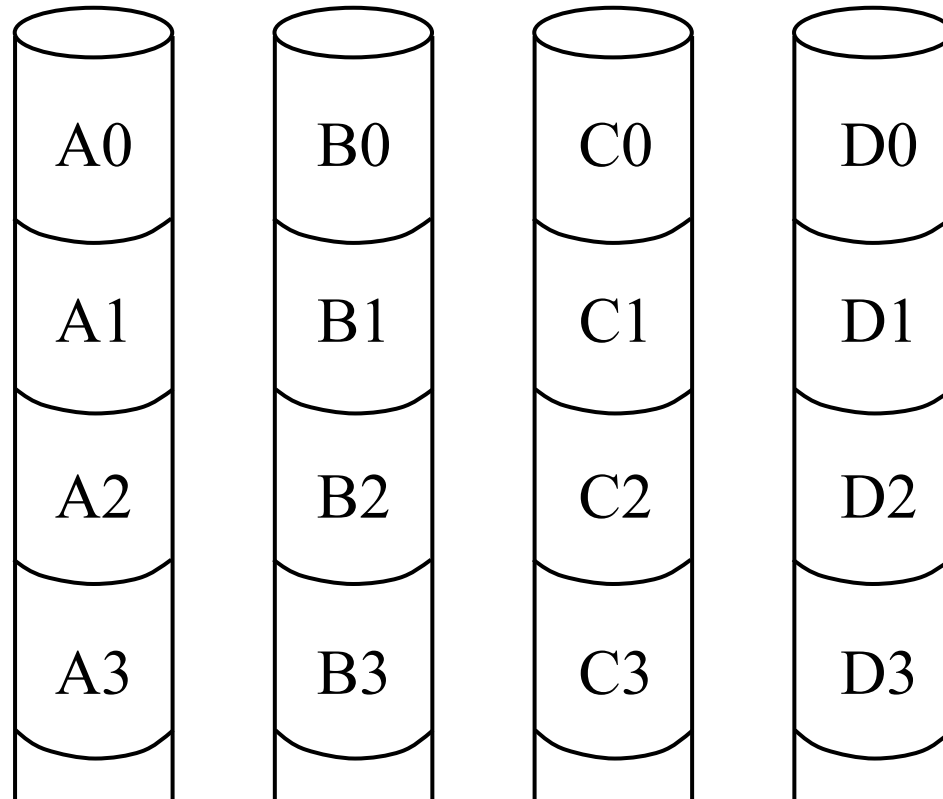


- Yes, it's a goofy name
 - industry really does sell “JBOD enclosures”

Disk Subsystem Load Balancing




- I/O requests are almost never evenly distributed
 - Some data is requested more than other data
 - Depends on the apps, usage, time, ...
- What is the right data-to-disk assignment policy?
 - Common approach: Fixed data placement
 - Your data is on disk X, period!
 - For good reasons too: you bought it or you're paying more...
 - Fancy: Dynamic data placement
 - If some of your files are accessed a lot, the admin(or even system) may separate the "hot" files across multiple disks
 - In this scenario, entire files systems (or even files) are manually moved by the system admin to specific disks
 - Alternative: Disk striping
 - Stripe all of the data across all of the disks


Disk Striping



- Interleave data across multiple disks
 - Large file streaming can enjoy parallel transfers
 - High throughput requests can enjoy thorough load balancing
 - If blocks of hot files equally likely on all disks (really?)

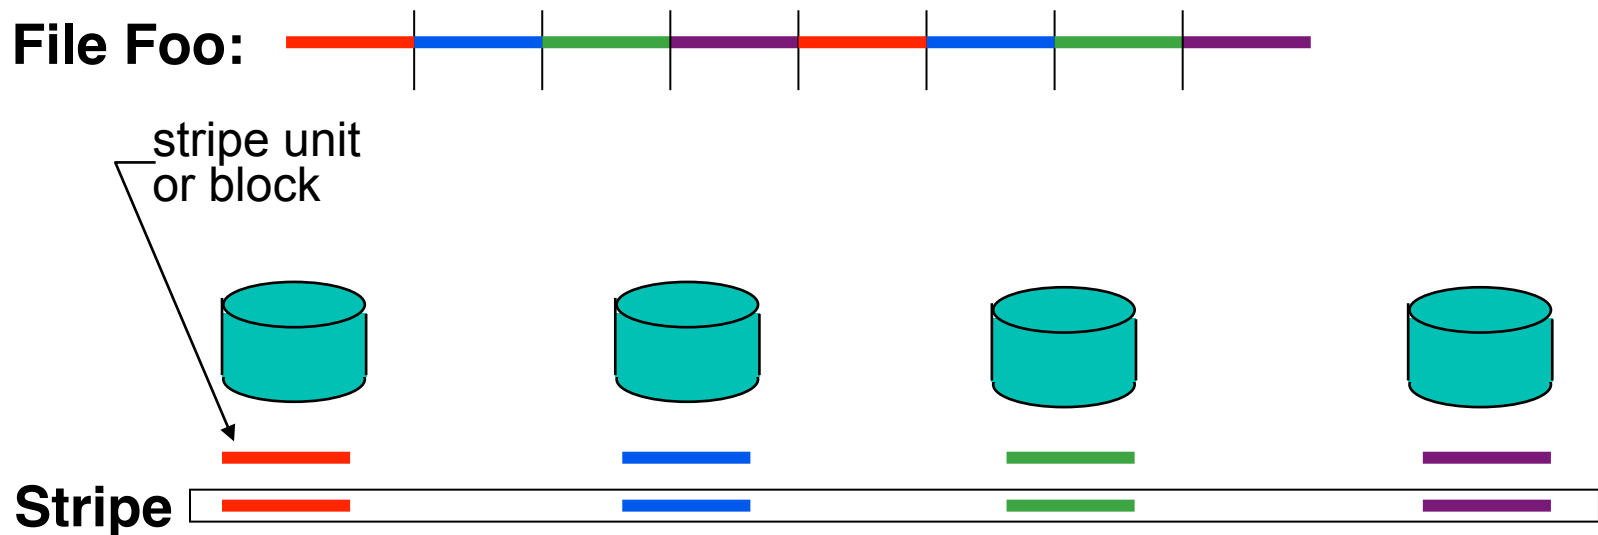


Disk striping details

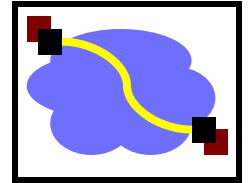


- How disk striping works
 - Break up total space into fixed-size stripe units
 - Distribute the stripe units among disks in round-robin
 - Compute location of block #B as follows
 - $\text{disk\#} = B \% N$ (%=modulo, $N = \text{\#ofdisks}$)

Now, What If A Disk Fails?




- In a JBOD (independent disk) system
 - one or more file systems lost
- In a striped system
 - a part of each file system lost
- Backups can help, but
 - backing up takes time and effort
 - backup doesn't help recover data lost during that day
 - Any data loss is a big deal to a bank or stock exchange

Tolerating and masking disk failures




- If a disk fails, it's data is gone
 - may be recoverable, but may not be
- To keep operating in face of failure
 - must have some kind of data redundancy
- Common forms of data redundancy
 - replication
 - error-correcting codes


Redundancy via replicas

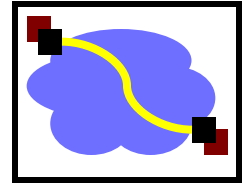


- Two (or more) copies
 - mirroring, shadowing, duplexing, etc.
- Write both, read either

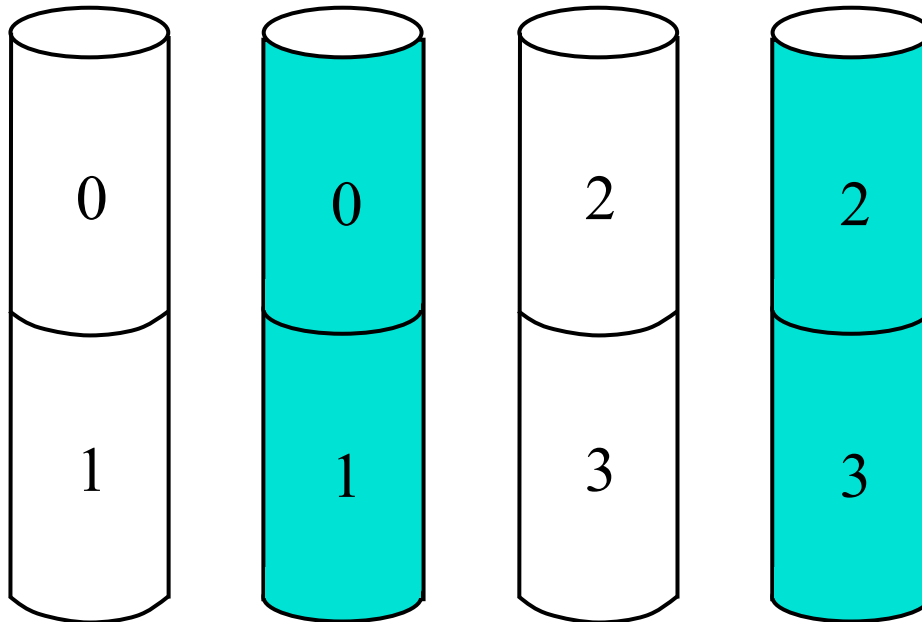


Mirroring & Striping





- Mirror to 2 virtual drives, where each virtual drive is really a set of striped drives
 - Provides reliability of mirroring
 - Provides striping for performance (with write update costs)

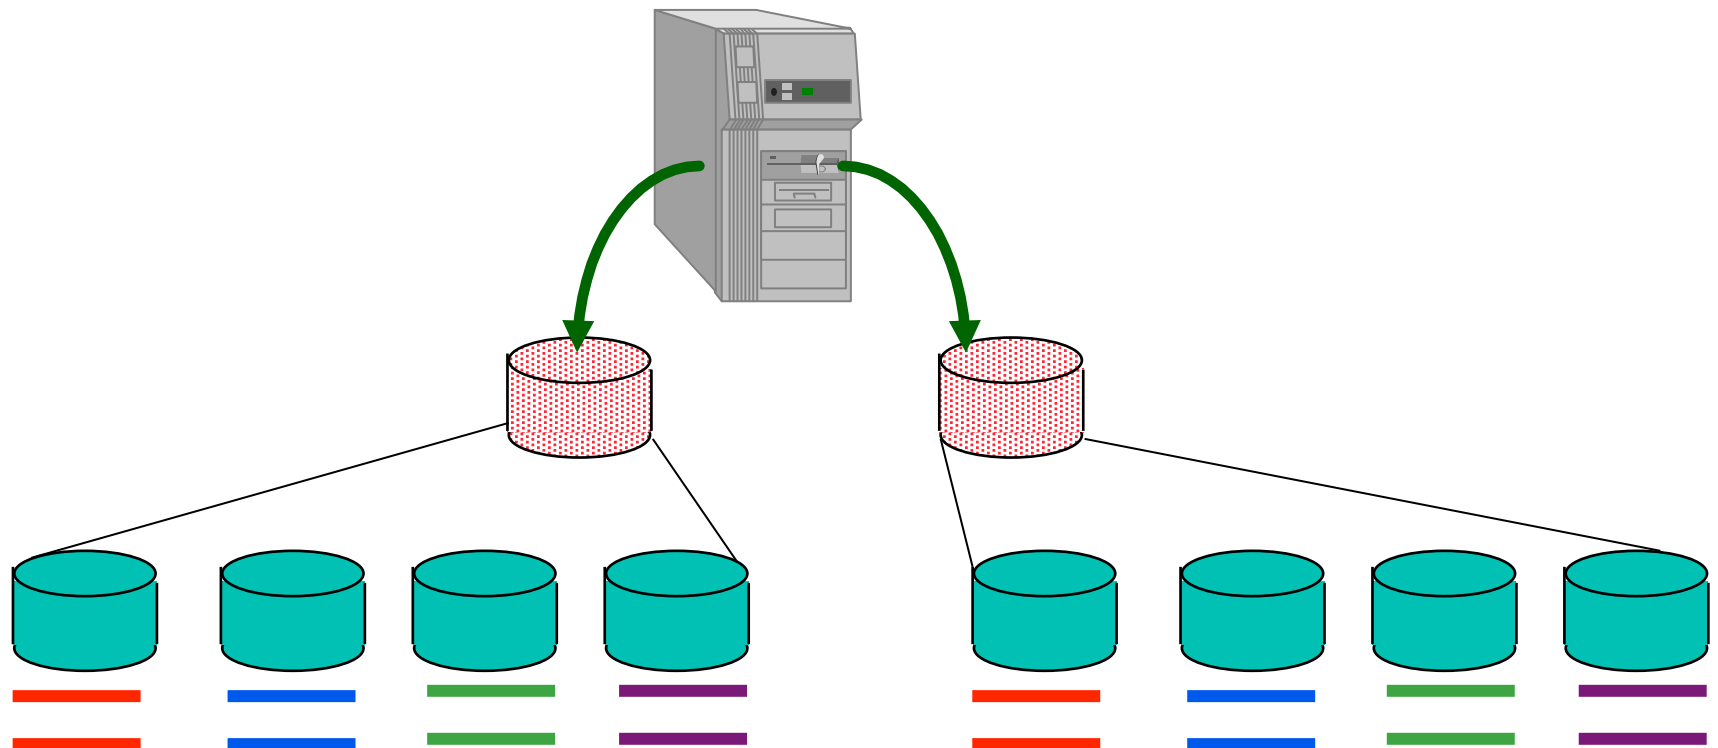


Implementing Disk Mirroring



- Mirroring can be done in either software or hardware
- Software solutions are available in most OS's
- Hardware solutions
 - Could be done in Host Bus Adaptor(s)
 - Could be done in Disk Array Controller

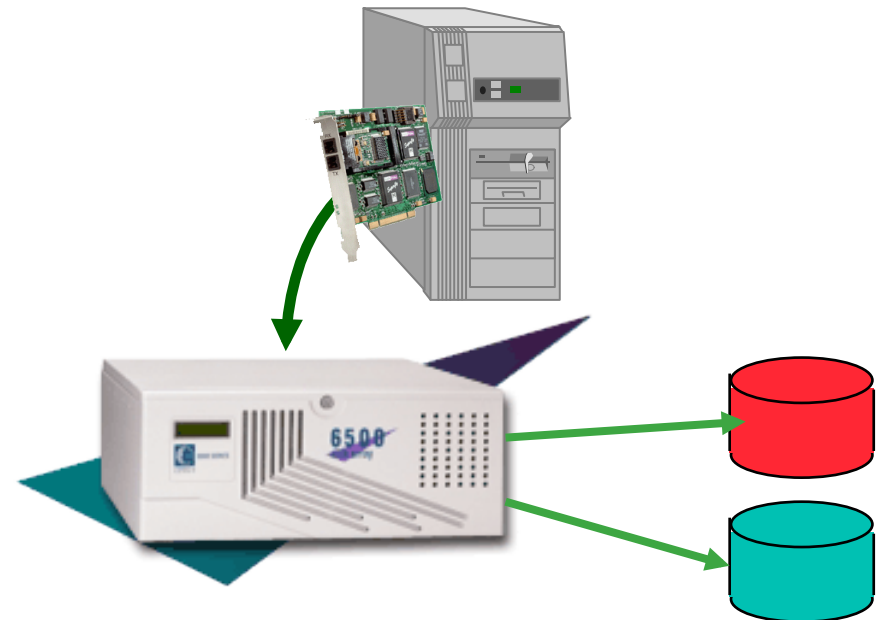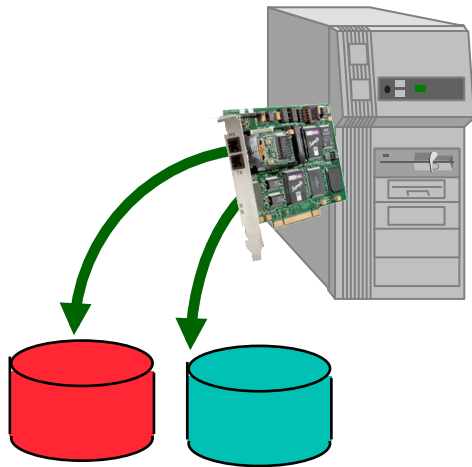


Lower Cost Data Redundancy

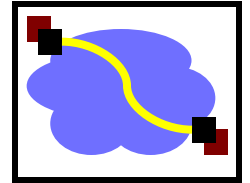


- Single failure protecting codes
 - general single-error-correcting code is overkill
 - General code finds error and fixes it
- Disk failures are self-identifying (a.k.a. erasures)
 - Don't have to find the error
- Parity is single-disk-failure-correcting code
 - recall that parity is computed via XOR
 - it's like the low bit of the sum


Simplest approach: Parity Disk




- One extra disk
- All writes update parity disk
 - Potential bottleneck
 - (different data in different As, Bs, Cs, Ds)
 - (Ap contains parity for all As)

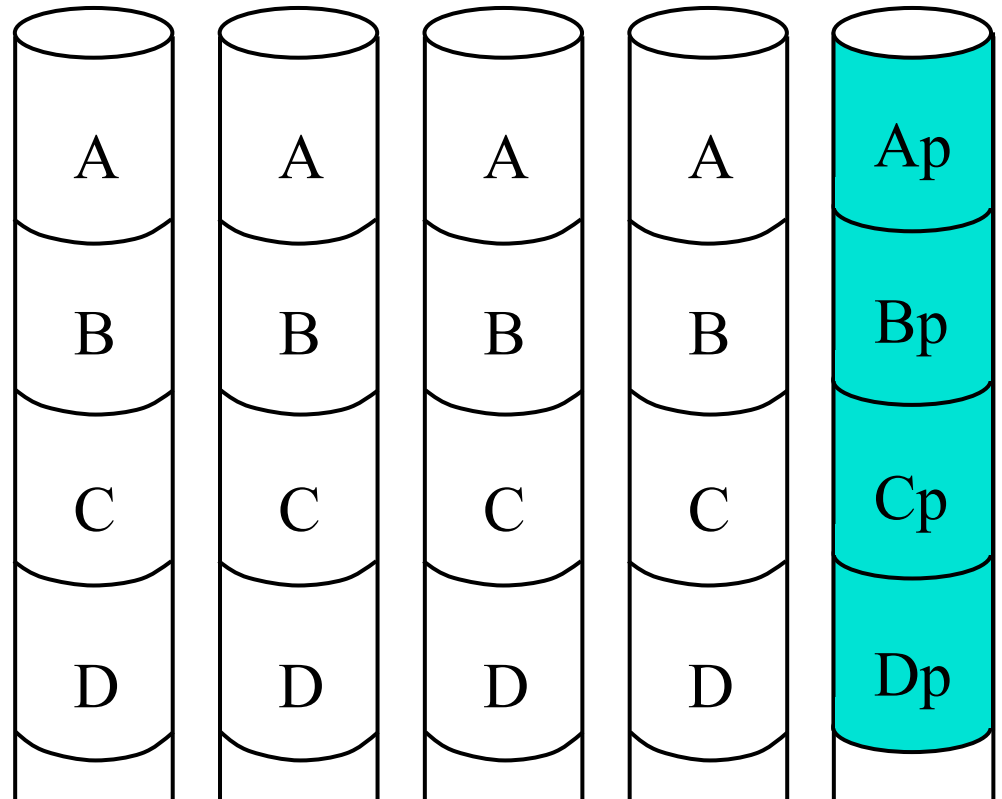


Updating and using the parity




Fault-Free Read

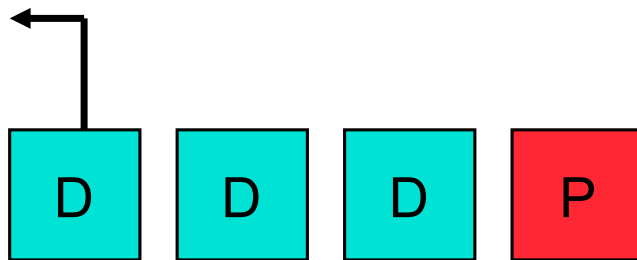


Fault-Free Write

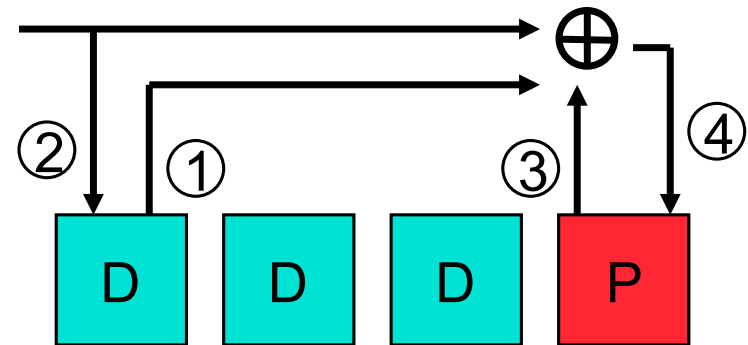


Degraded Read

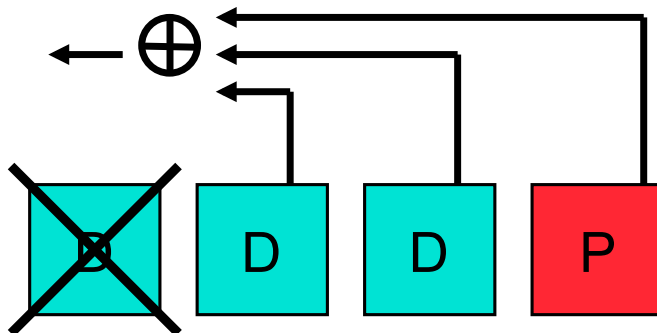

Degraded Write

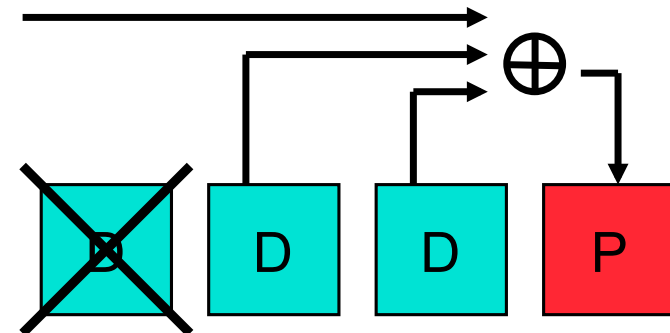


The parity disk bottleneck

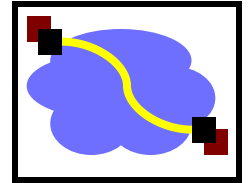


- Reads go only to the data disks
 - But, hopefully load balanced across the disks
- All writes go to the parity disk
 - And, worse, usually result in Read-Modify-Write sequence
 - So, parity disk can easily be a bottleneck


Solution: Striping the Parity



- Removes parity disk bottleneck

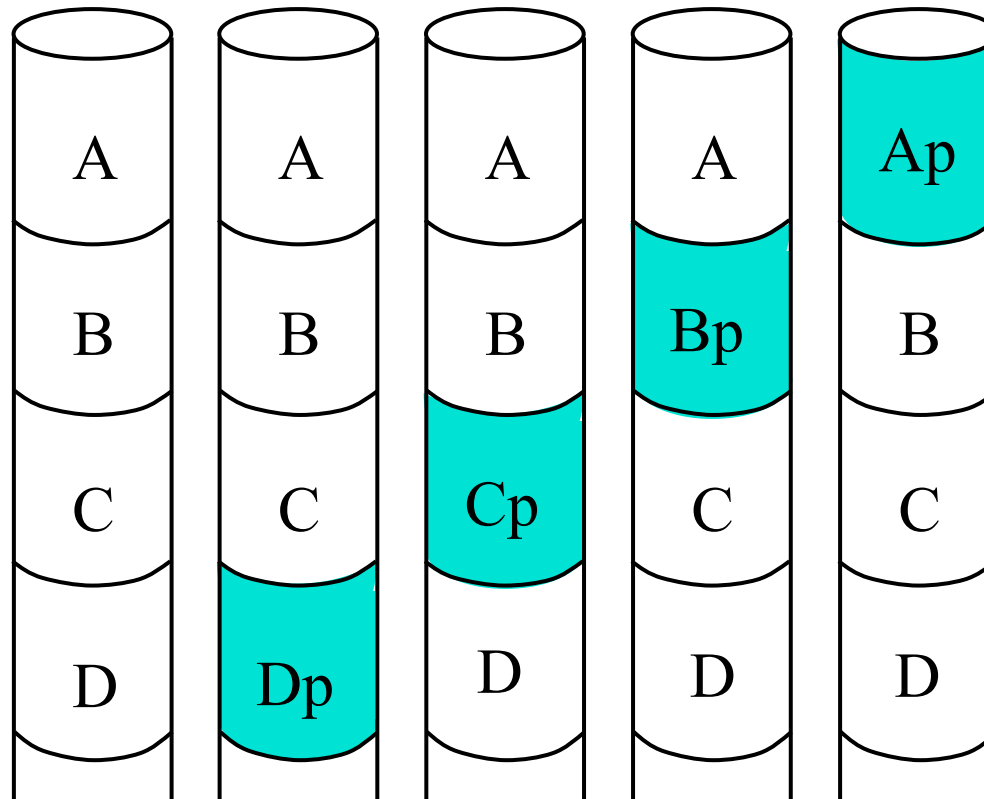


Outline

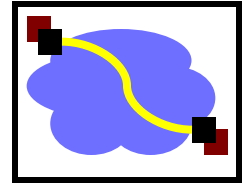


- Using multiple disks
 - Why have multiple disks?
 - problem and approaches
- RAID levels and performance

RAID Taxonomy




- Redundant Array of Inexpensive Independent Disks
 - Constructed by UC-Berkeley researchers in late 80s (Garth)
- **RAID 0** – Coarse-grained Striping with no redundancy
- **RAID 1** – Mirroring of independent disks
- RAID 2 – Fine-grained data striping plus Hamming code disks
 - Uses Hamming codes to detect and correct multiple errors
 - Originally implemented when drives didn't always detect errors
 - Not used in real systems
- RAID 3 – Fine-grained data striping plus parity disk
- **RAID 4** – Coarse-grained data striping plus parity disk
- **RAID 5** – Coarse-grained data striping plus striped parity
- RAID 6 – Coarse-grained data striping plus 2 striped codes

RAID-0: Striping



- Stripe blocks across disks in a “chunk” size
 - How to pick a reasonable chunk size?


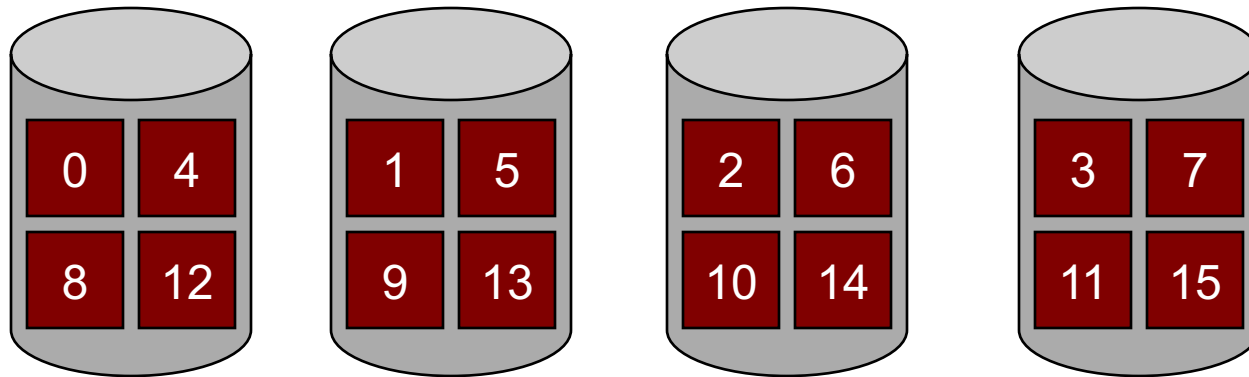


How to calculate where chunk # lives?

Disk #:


Offset within disk:

RAID-0: Striping

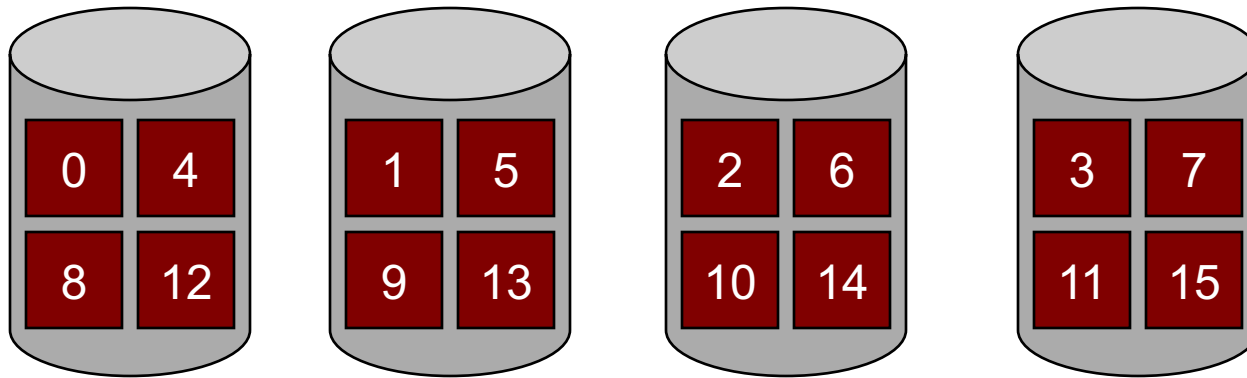


- Evaluate for D disks
- Performance: How much faster than 1 disk? (best case)
- Reliability: More or less reliable than 1 disk?

RAID-1: Mirroring

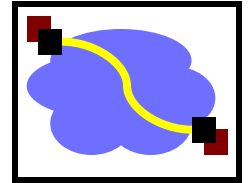


- Motivation: Handle disk failures
- Put copy (mirror or replica) of each chunk on another disk

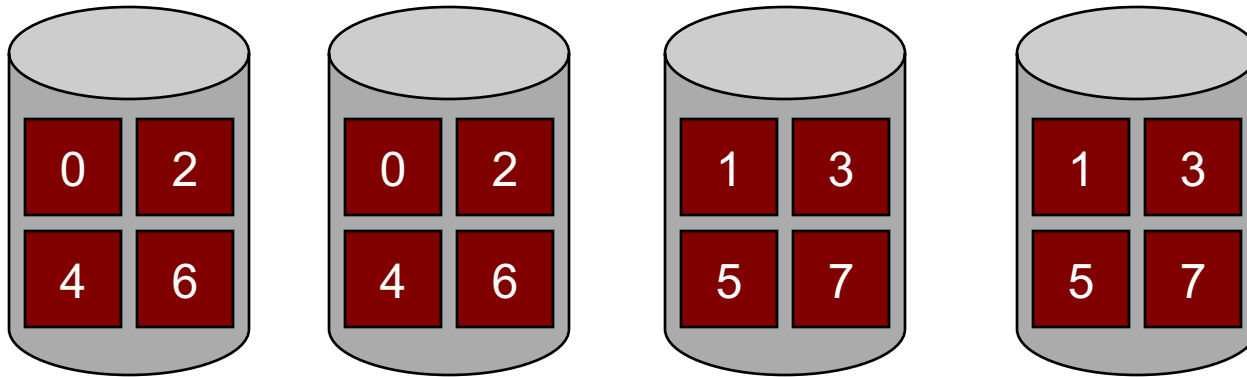


- Capacity
- Reliability
- Performance

RAID-4: Parity





- Motivation: **Improve capacity**
- Idea: Allocate parity block to encode info about blocks
 - Parity checks all other blocks in stripe across other disks
- Parity block = XOR over others (gives “even” parity)
 - Example: 0 1 0 → Parity value?
- How do you recover from a failed disk?
 - Example: x 0 0 and parity of 1
 - What is the failed value?

A	B	XOR
0	0	0
0	1	1
1	0	1
1	1	0

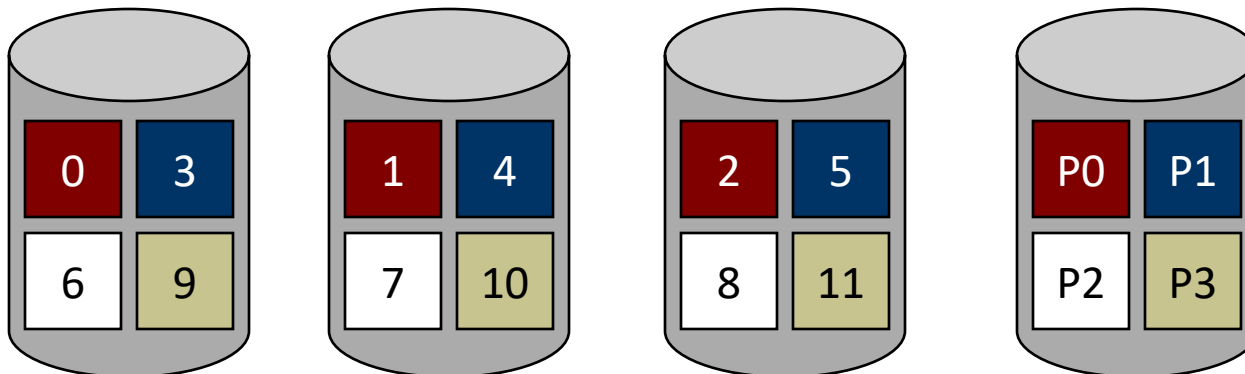


RAID-4: Parity

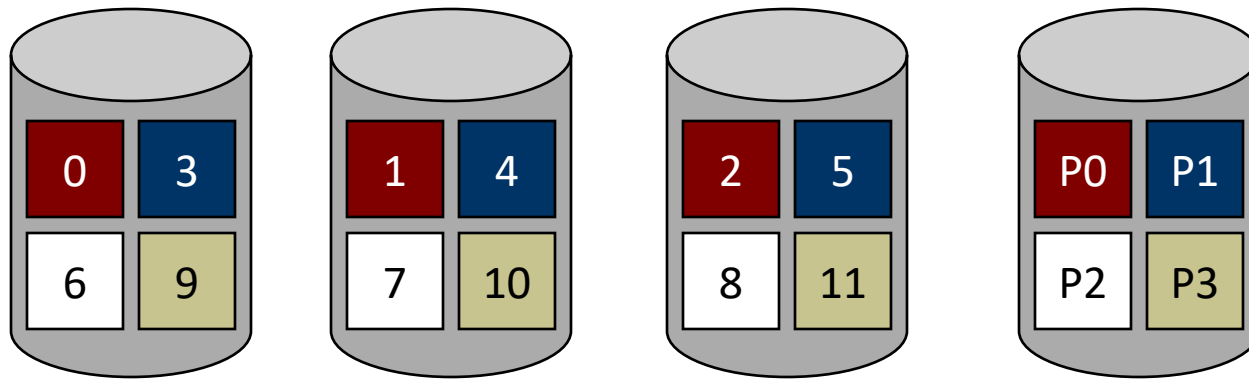


- Capacity:
- Reliability:
- Performance:
 - Reads
 - Writes: How to update parity block?
 - Two ways:
 - Use parity disk
 - Re-compute parity from non-parity disks
 - (Parity disk is the bottleneck)


Updating and using the parity




Fault-Free Read

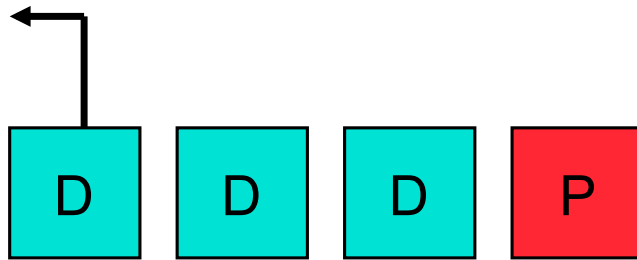


Fault-Free Write

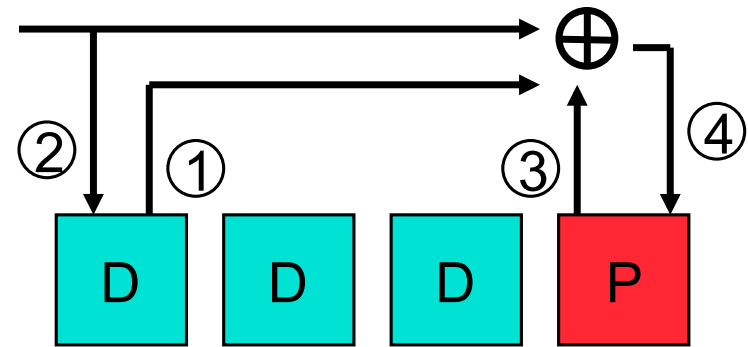


Degraded Read

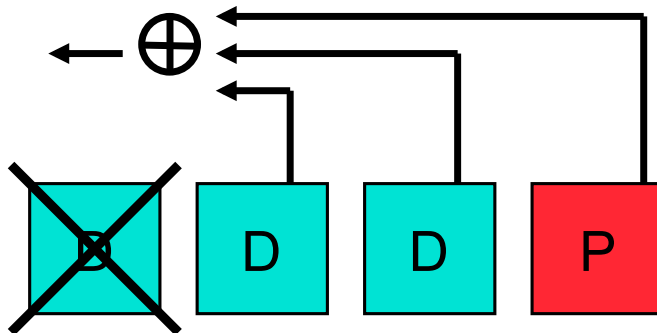


Degraded Write

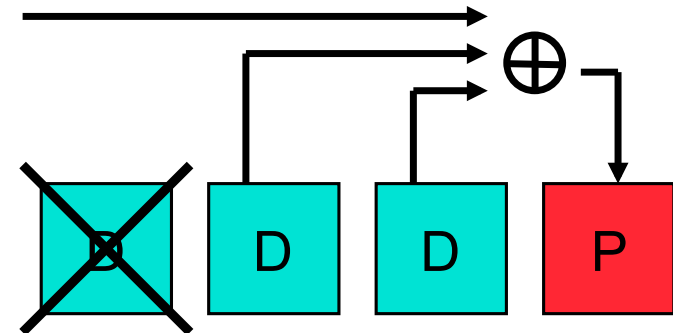

RAID-5: Rotated/Striped Parity



Rotate location of parity across all disks

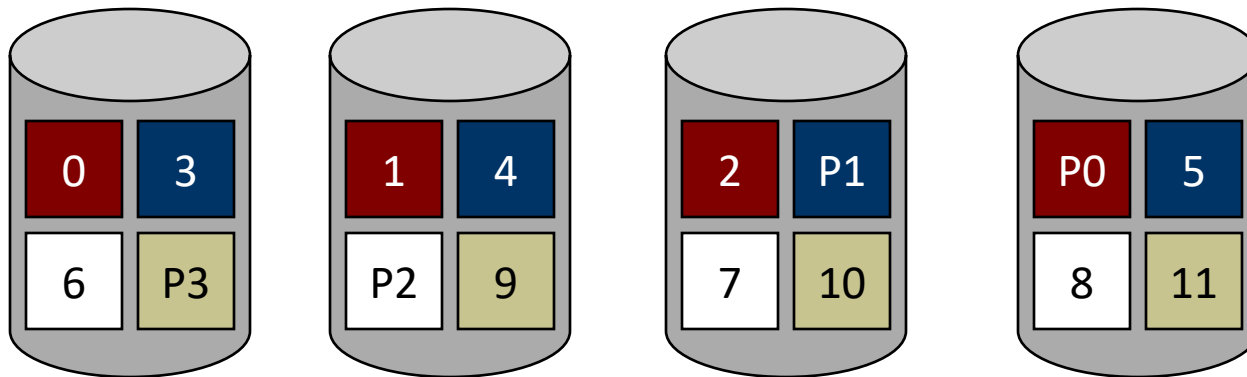

- Capacity:
- Reliability:
- Performance:
 - Reads:
 - Writes:
 - Still requires 4 I/Os per write, but not always to same parity disk

Comparison

N: number of disks

S: throughput of 1 disk sequential read/write

R: throughput of 1 disk random read/write

D: delay to read/write from 1 disk

	RAID-0	RAID-1	RAID-4	RAID-5
Capacity	N	$N/2$	$N - 1$	$N - 1$
Reliability	0	1 (for sure) $\frac{N}{2}$ (if lucky)	1	1
Throughput				
Sequential Read	$N \cdot S$	$(N/2) \cdot S$	$(N - 1) \cdot S$	$(N - 1) \cdot S$
Sequential Write	$N \cdot S$	$(N/2) \cdot S$	$(N - 1) \cdot S$	$(N - 1) \cdot S$
Random Read	$N \cdot R$	$N \cdot R$	$(N - 1) \cdot R$	$N \cdot R$
Random Write	$N \cdot R$	$(N/2) \cdot R$	$\frac{1}{2} \cdot R$	$\frac{N}{4} R$
Latency				
Read	D	D	D	D
Write	D	D	$2D$	$2D$

Table 38.7: RAID Capacity, Reliability, and Performance

Comparison

N: number of disks

S: throughput of 1 disk sequential read/write

R: throughput of 1 disk random read/write

D: delay to read/write from 1 disk

	RAID-0	RAID-1	RAID-4	RAID-5
Capacity	N	$N/2$	$N - 1$	$N - 1$
Reliability	0	1 (for sure) $\frac{N}{2}$ (if lucky)	1	1
Throughput				
Sequential Read	$N \cdot S$	$(N/2) \cdot S$	$(N - 1) \cdot S$	$(N - 1) \cdot S$
Sequential Write	$N \cdot S$	$(N/2) \cdot S$	$(N - 1) \cdot S$	$(N - 1) \cdot S$
Random Read	$N \cdot R$	$N \cdot R$	$(N - 1) \cdot R$	$N \cdot R$
Random Write	$N \cdot R$	$(N/2) \cdot R$	$\frac{1}{2} \cdot R$	$\frac{N}{4} R$
Latency				
Read	D	D	D	D
Write	D	D	$2D$	$2D$

Table 38.7: RAID Capacity, Reliability, and Performance

Comparison

N: number of disks

S: throughput of 1 disk sequential read/write

R: throughput of 1 disk random read/write

D: delay to read/write from 1 disk

	RAID-0	RAID-1	RAID-4	RAID-5
Capacity	N	$N/2$	$N - 1$	$N - 1$
Reliability	0	1 (for sure) $\frac{N}{2}$ (if lucky)	1	1
Throughput				
Sequential Read	$N \cdot S$	$(N/2) \cdot S$	$(N - 1) \cdot S$	$(N - 1) \cdot S$
Sequential Write	$N \cdot S$	$(N/2) \cdot S$	$(N - 1) \cdot S$	$(N - 1) \cdot S$
Random Read	$N \cdot R$	$N \cdot R$	$(N - 1) \cdot R$	$N \cdot R$
Random Write	$N \cdot R$	$(N/2) \cdot R$	$\frac{1}{2} \cdot R$	$\frac{N}{4} R$
Latency				
Read	D	D	D	D
Write	D	D	$2D$	$2D$

Table 38.7: RAID Capacity, Reliability, and Performance

Comparison

N: number of disks

S: throughput of 1 disk sequential read/write

R: throughput of 1 disk random read/write

D: delay to read/write from 1 disk

	RAID-0	RAID-1	RAID-4	RAID-5
Capacity	N	$N/2$	$N - 1$	$N - 1$
Reliability	0	1 (for sure) $\frac{N}{2}$ (if lucky)	1	1
Throughput				
Sequential Read	$N \cdot S$	$(N/2) \cdot S$	$(N - 1) \cdot S$	$(N - 1) \cdot S$
Sequential Write	$N \cdot S$	$(N/2) \cdot S$	$(N - 1) \cdot S$	$(N - 1) \cdot S$
Random Read	$N \cdot R$	$N \cdot R$	$(N - 1) \cdot R$	$N \cdot R$
Random Write	$N \cdot R$	$(N/2) \cdot R$	$\frac{1}{2} \cdot R$	$\frac{N}{4} R$
Latency				
Read	D	D	D	D
Write	D	D	$2D$	$2D$

Table 38.7: RAID Capacity, Reliability, and Performance

Comparison

N: number of disks

S: throughput of 1 disk sequential read/write


R: throughput of 1 disk random read/write

D: delay to read/write from 1 disk


	RAID-0	RAID-1	RAID-4	RAID-5
Capacity	N	$N/2$	$N - 1$	$N - 1$
Reliability	0	1 (for sure) $\frac{N}{2}$ (if lucky)	1	1
Throughput				
Sequential Read	$N \cdot S$	$(N/2) \cdot S$	$(N - 1) \cdot S$	$(N - 1) \cdot S$
Sequential Write	$N \cdot S$	$(N/2) \cdot S$	$(N - 1) \cdot S$	$(N - 1) \cdot S$
Random Read	$N \cdot R$	$N \cdot R$	$(N - 1) \cdot R$	$N \cdot R$
Random Write	$N \cdot R$	$(N/2) \cdot R$	$\frac{1}{2} \cdot R$	$\frac{N}{4} R$
Latency				
Read	D	D	D	D
Write	D	D	$2D$	$2D$

Table 38.7: RAID Capacity, Reliability, and Performance


Advanced Issues



- What happens if more than one fault?
 - Example: One disk fails plus “latent sector error” on another
 - RAID-5 cannot handle two faults
 - Solution: RAID-6: add multiple parity blocks
- Why is NVRAM useful?
 - Example: What if update 2, don't update P0 before power failure (or crash), and then disk 1 fails?
 - NVRAM solution: Use to store blocks updated in same stripe
 - If power failure, can replay all writes in NVRAM
 - Software RAID solution: Perform parity scrub over entire disk

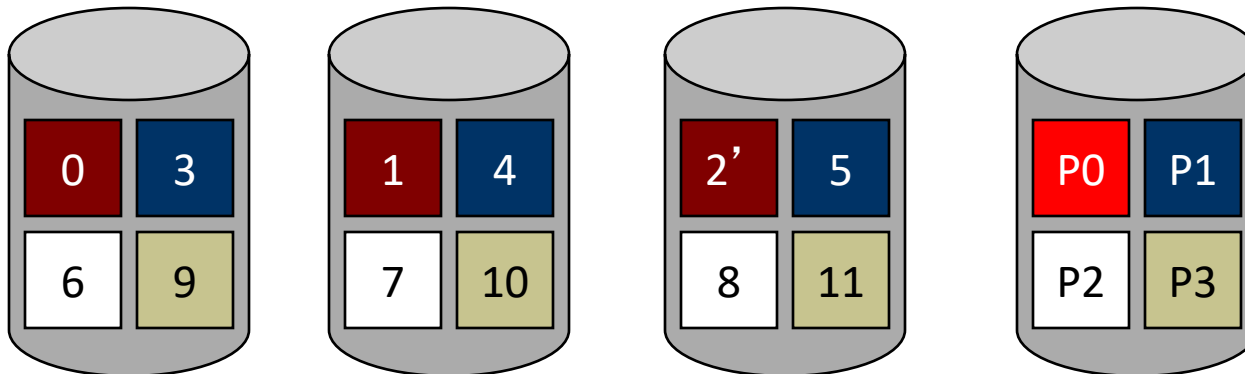

Conclusions



- RAID turns multiple disks into a larger, faster, more reliable disk
- RAID-0: Striping
Good when performance and capacity really matter, but reliability doesn't
- RAID-1: Mirroring
Good when reliability and write performance matter, but capacity (cost) doesn't
- RAID-4: Parity disk
- RAID-5: Rotating parity
Good when capacity and cost matter or workload is read-mostly
 - Good compromise choice