Applications in Information Visualization

Tamara Munzner

University of British Columbia
Department of Computer Science

Outline

information visualization motivation

designing for humans

information visualization techniques

future directions

Information visualization

interactive visual representation of abstract data
- help human perform some task more effectively

Interactivity

static images
- 10,000 years
- art, graphic design

moving images
- 100 years
- cinematography

interactive graphics
- 20 years
- computer graphics, human–computer interaction

Information visualization

interactive visual representation of abstract data
- help human perform some task more effectively

external representation
- reduces load on working memory

bridging many fields
- graphics: interacting in realtime
- cognitive psych: finding appropriate representation
- HCI: using task to guide design and evaluation

Task-oriented design

custom design for checking semantic networks
- reading definition subgraph labels

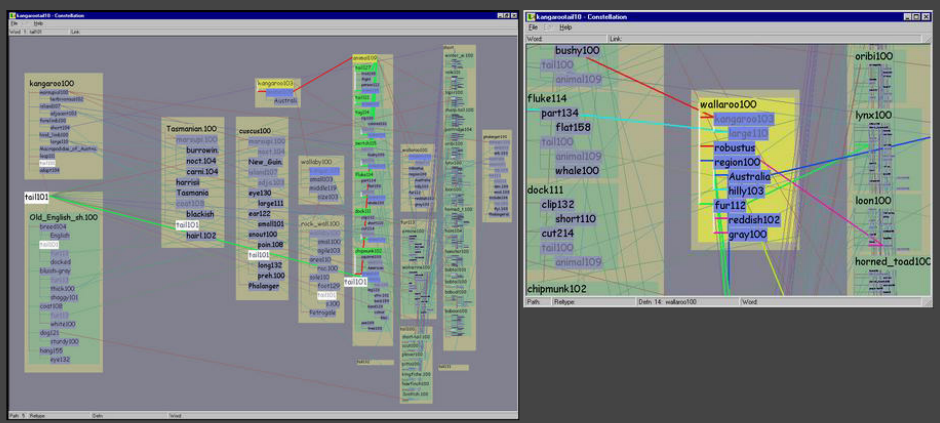

[graphics.stanford.edu/papers/munzner_thesis/html/node10.html#layoutefffig]

Task-oriented design

previous general methods

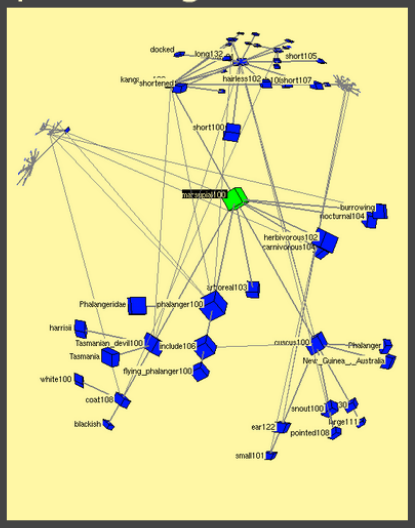

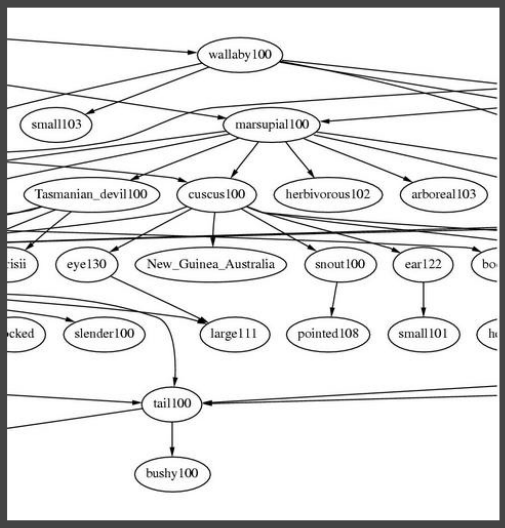

[graphics.stanford.edu/papers/munzner_thesis/html/node10.html#dotconstfig]

Design tradeoffs

information density vs. visual salience

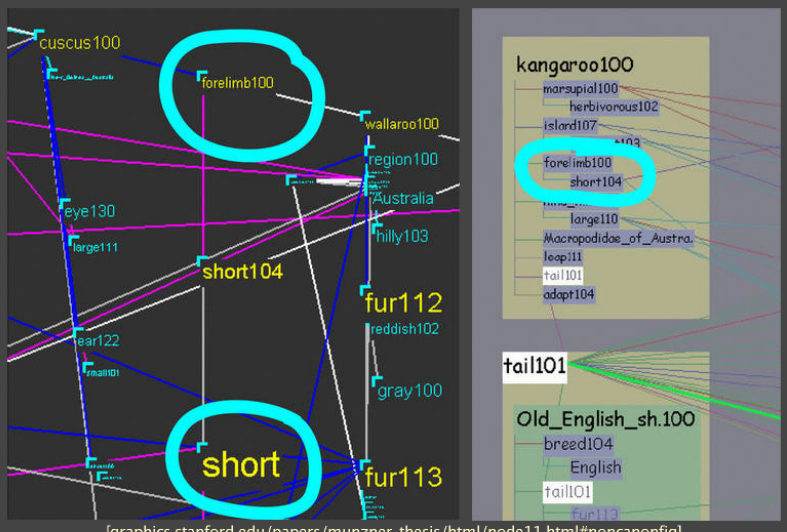

[graphics.stanford.edu/papers/munzner_thesis/html/node11.html#noncanonfig]

Scientific vs. information visualization

scivis: inherently spatial data
- fluid flow over airplane wing

infovis: abstract data, choice of spatialization
- FilmFinder

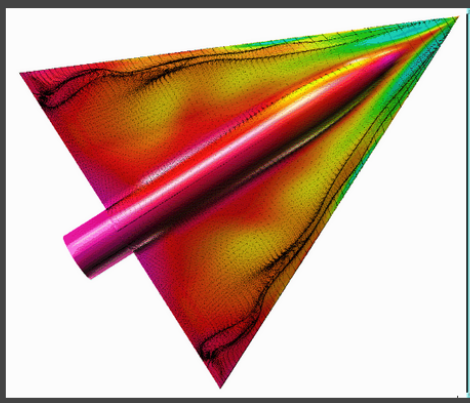

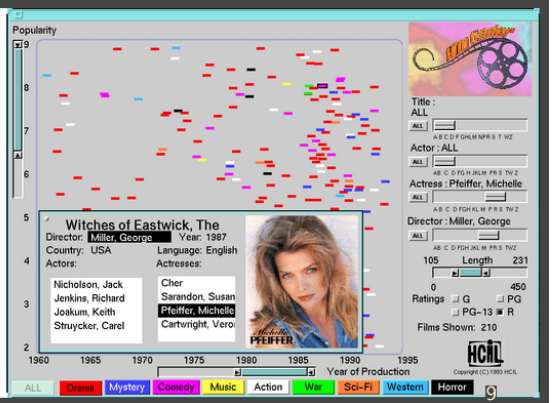

[www.nas.nasa.gov/NASnews/95/05/delta.html]

[Ahlberg and Shneiderman. CHI 94]

9

Example: node-link graphs

powerful abstraction

common in many domains



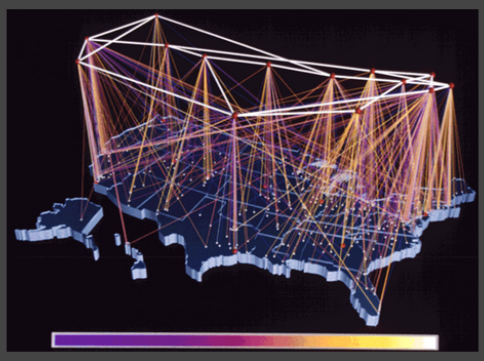

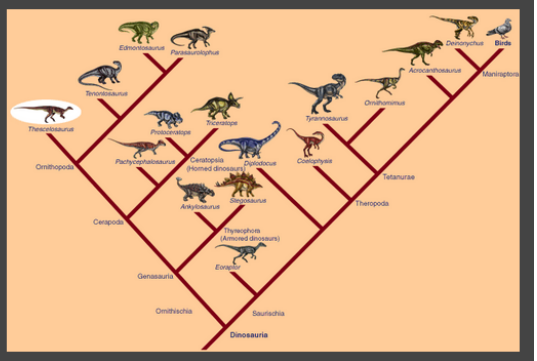

[Cox and Patterson 92]

[www.dinoheart.org/images/cladogram.gif]

10

Why visualize graphs?

Example: book topic relationships

- [Godel, Escher, Bach. Hofstadter 1979]

Paradoxes – Lewis Carroll
Turing – Halting problem
Halting problem – Infinity
Paradoxes – Infinity
Infinity – Lewis Carroll
Infinity – Unpredictably long searches
Infinity – Recursion
Infinity – Zeno
Infinity – Paradoxes
Lewis Carroll – Zeno
Lewis Carroll – Wordplay
Halting problem – Decision procedures
BlooP and FlooP – AI
Halting problem – Unpredictably long searches
BlooP and FlooP – Unpredictably long searches
BlooP and FlooP – Recursion
Tarski – Truth vs. provability
Tarski – Epimenides
Tarski – Undecidability
Paradoxes – Self-ref
[...]

Why visualize graphs?

offload cognition to visual systems
minimal attention to read answer

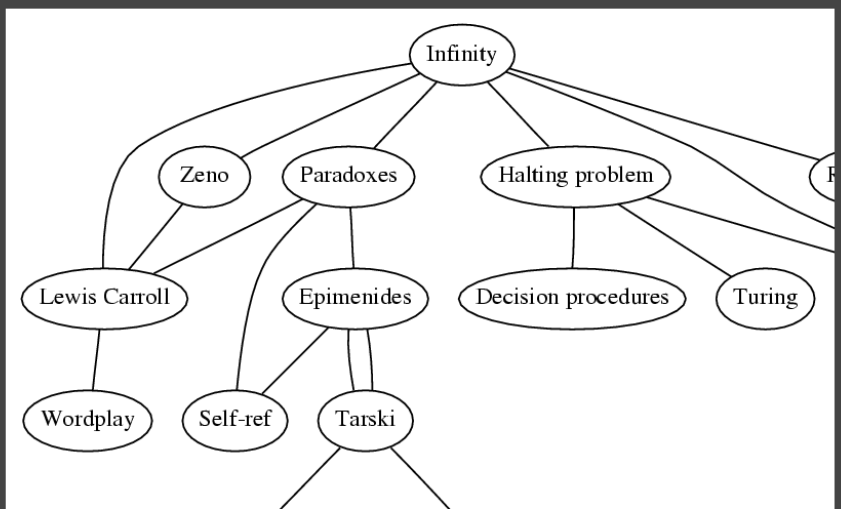

Why draw graphs automatically?

manual: hours, days

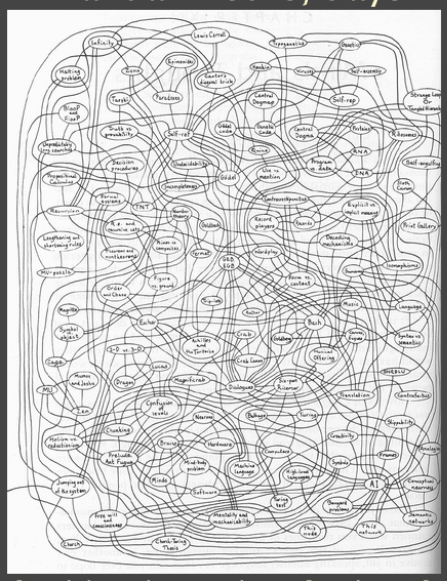

[Godel, Escher, Bach. Hofstader 79]

automatic: seconds

dot, [Gansner et al 93]

Outline

information visualization motivation

designing for humans

information visualization techniques

future directions

Preattentive visual dimensions

color (hue) alone: preattentive

- attentional system not invoked
- search speed independent of distractor count

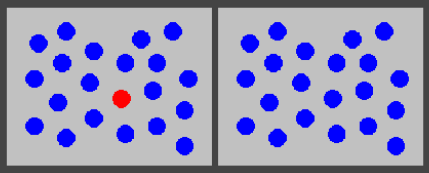

[Chris Healey, Preattentive Processing, www.csc.ncsu.edu/faculty/healey/PP/PP.html]

Preattentive visual dimensions

many preattentive dimensions of visual modality

- hue
- shape
- texture
- length
- width
- size
- orientation
- curvature
- intersection
- intensity
- flicker
- direction of motion
- stereoscopic depth
- lighting direction

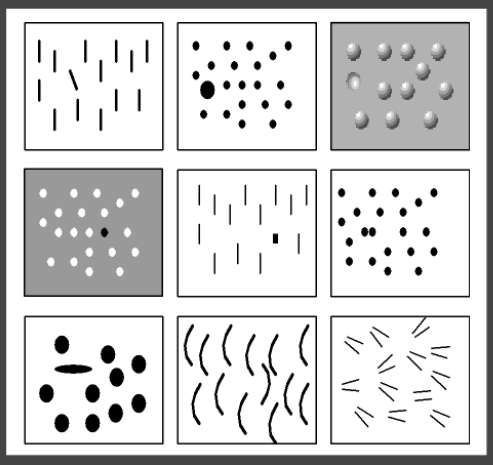

[Chris Healey, Preattentive Processing, www.csc.ncsu.edu/faculty/healey/PP/PP.html]

Preattentive visual dimensions

color alone: preattentive
shape alone: preattentive

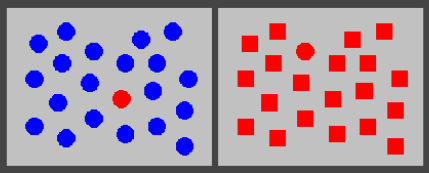

combined hue and shape: multimodal

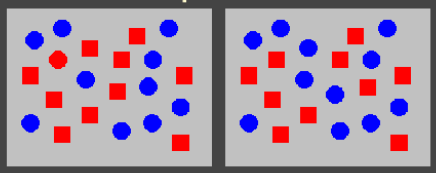

- requires attention
- search speed linear with distractor count

[Chris Healey, Preattentive Processing, www.csc.ncsu.edu/faculty/healey/PP/PP.html]

Dimensional ranking

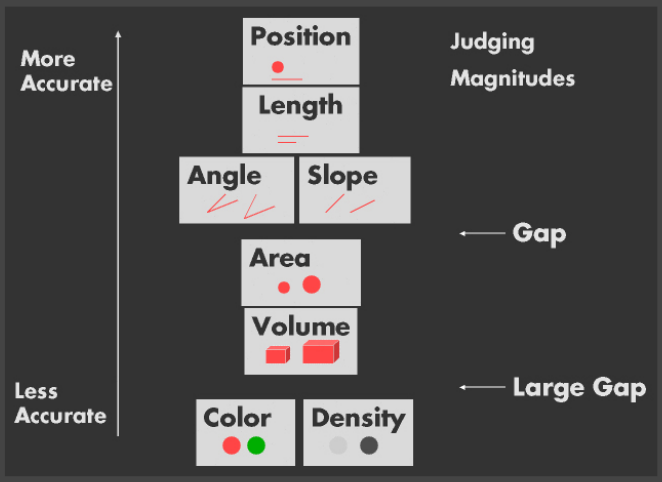

[graphics.stanford.edu/courses/cs448b-02-spring/lectures/encoding/walk015.html]

Data types

continuous (quantitative)
- 10 inches, 17 inches, 23 inches



ordered (ordinal)
- small, medium, large

categorical (nominal)
- apples, oranges, bananas

[graphics.stanford.edu/papers/polaris]

Dimensional ranking varies by data type

spatial position best for all types

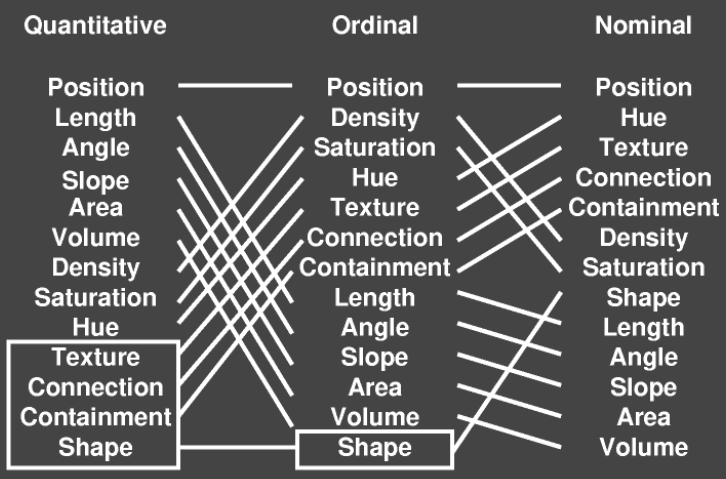

[Mackinlay, Automating the Design of Graphical Presentations of Relational Information, ACM TOG 5:2, 1986]

Nonlinear perception of magnitudes

sensory dimensions not equally discriminable

- Stevens power law

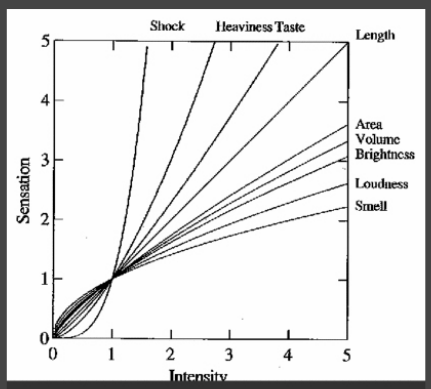

$$S = I^p$$

[Stevens, On the Theory of Scales of Measurement, Science 103:2684, 1946]

Dimensional dynamic range

linewidth: limited discriminability

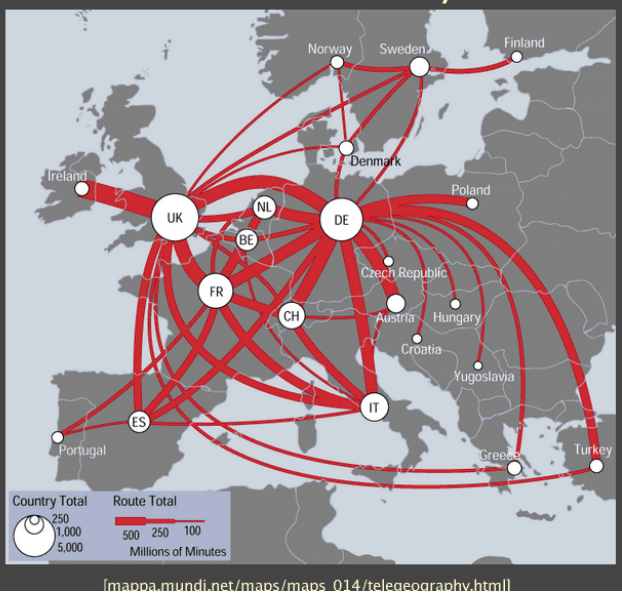

[mappa.mundi.net/maps/maps_014/telegeography.html]

Integral vs. separable dimensions

red-green yellow-blue	x-size y-size	size orientation	color shape	color motion	color location

[Colin Ware, Information Visualization: Perception for Design. Morgan Kaufmann 1999.]

Outline

information visualization motivation

designing for humans

information visualization techniques

future directions

Color rules of thumb

nominal
- bad: > 12 hues
- good: use <= ~12 hues

ordinal
- bad: using hue
- good: saturation/brightness

quantitative
- bad: rainbow colormaps
- good: interpolate between two hues

[Colin Ware, Information Visualization: Perception for Design. Morgan Kaufmann 1999.]

Colormaps

rainbow colormaps usually bad idea
- hue is mediocre for showing order
- not perceptually linear!

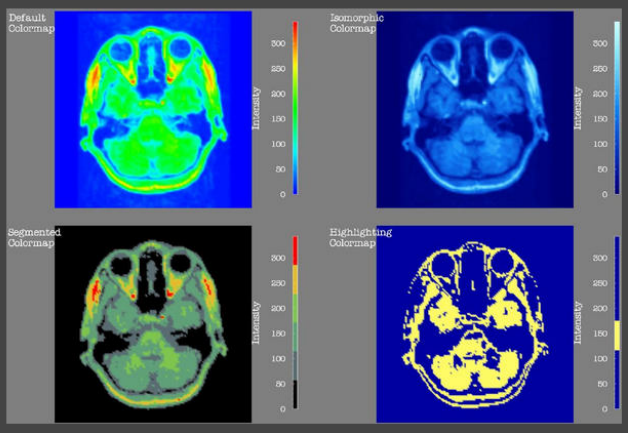

[Rogowitz and Treinish, How NOT to Lie with Visualization, www.research.ibm.com/dx/proceedings/pravda/truevis.htm

Colormaps

interpolating between two hues usually safe

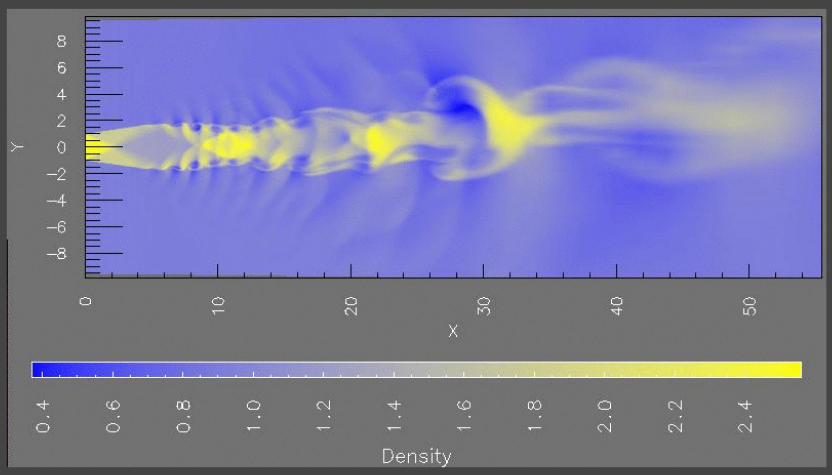

[Rogowitz and Treinish, How NOT to Lie with Visualization, www.research.ibm.com/dx/proceedings/pravda/truevis.htm

Overview+detail

problem

- avoid user disorientation when inspecting detail
- hard for big datasets

bad: one window, must remember position



global overview



local detail

Overview and detail

better: add linked overview window(s)

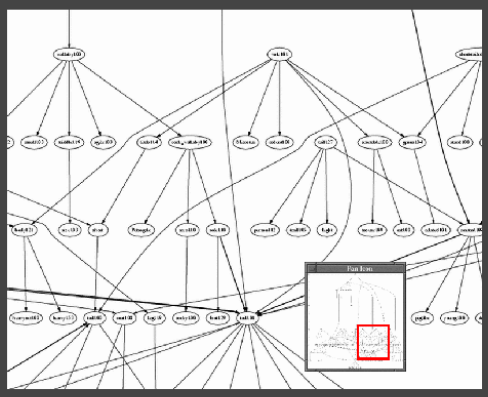

how to create overview?

Overview and detail

SeeSoft: software maintenance

- (colormaps: segmented vs. continuous)

code age

platform dependencies

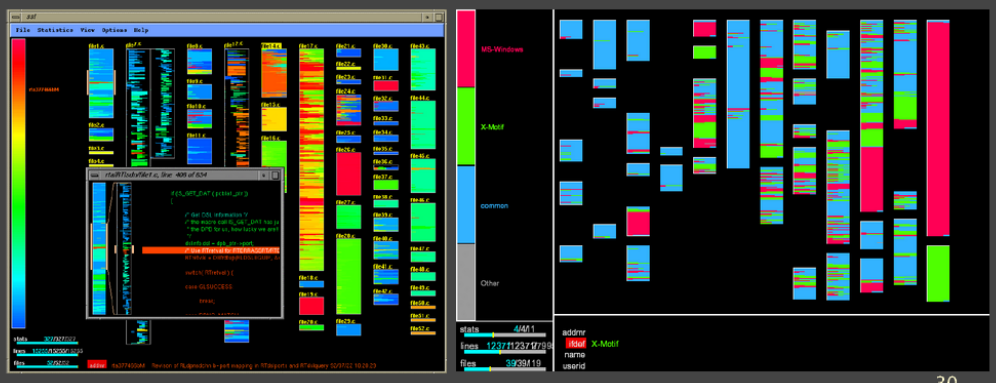

[Ball and Eick, Software Visualization in the Large, Computer 29:4, 1996
citeseer.nj.nec.com/ball96software.html]

Overview+detail

Rivet: performance tuning

- level of detail

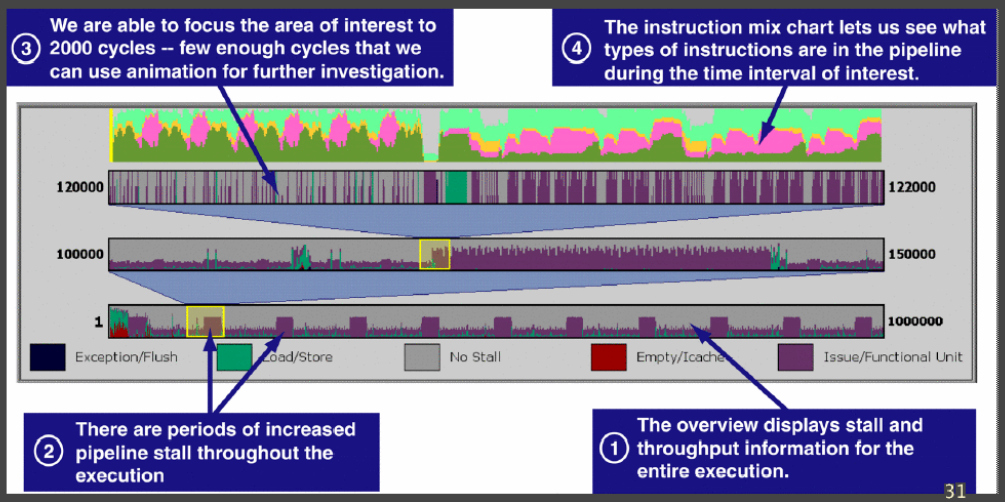

[Stolte et al, Visualizing Application Behavior on Superscalar Processors, InfoVis 99, graphics.stanford.edu/papers/rivet_pipeline]

Overview to detail to sorting

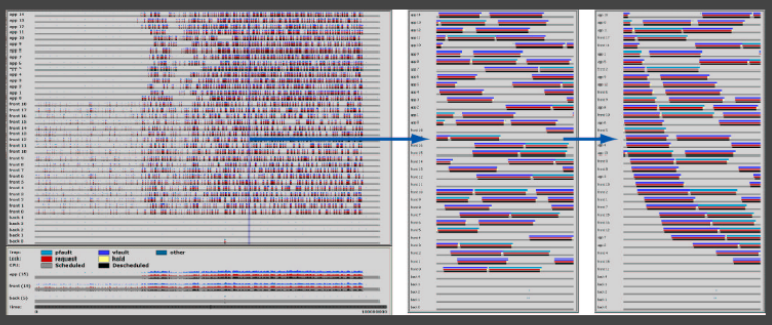

[Bosch, Performance Analysis and Visualization of Parallel Systems Using SimOS and Rivet: A Case Study, HPCA6, 2000. graphics.stanford.edu/papers/rivet_argus]

Focus+context

linked windows
- still have cognitive load to correlate

good solution:
- merge overview, detail into single window

fisheye views [Furnas 86], [Sarkar et al 94]



Focus+context

linked windows
- still have cognitive load to correlate

good solution:
- merge overview, detail into single window

fisheye views [Furnas 86], [Sarkar et al 94]
nonlinear magnification [Keahey 96]



Focus+context

H3 [Munzner 97]

- task: browsing large quasi-hierarchical graphs
- [demo]

[Munzner 1997, 1998a, 1998b]

Global focus+context

TreeJuxtaposer: comparing trees

- linked highlighting
- [demo]

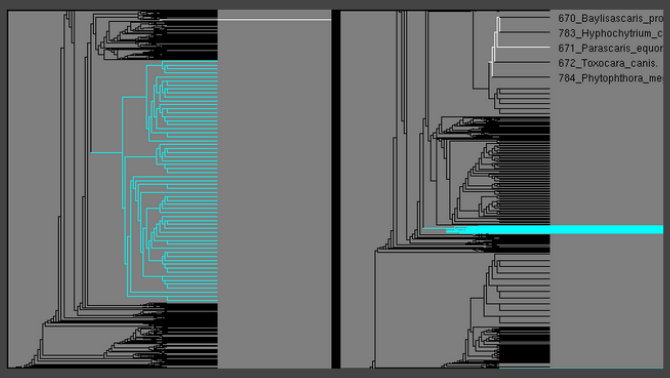

Comparison

bad: temporal, if many items
- related to change blindness
- good: temporal blinking if two items

good: side by side
- array of small multiples
- creates overview

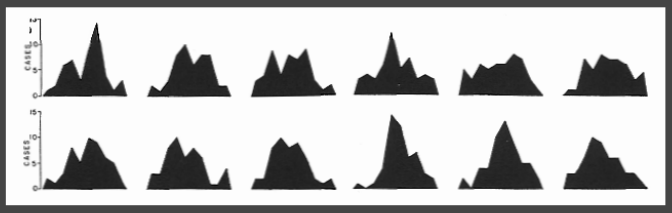

Glyph small multiples: InfoBug

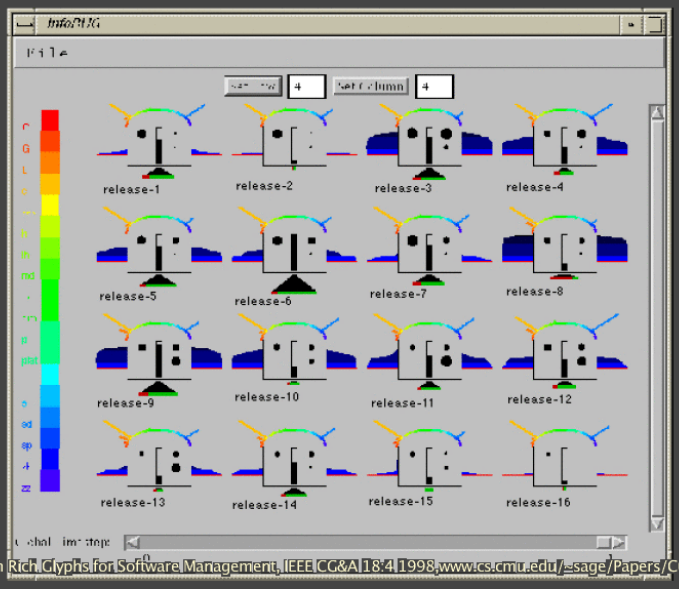

[Chuah et al, Information Rich Glyphs for Software Management, IEEE CG&A 18:4 1998, www.cs.cmu.edu/~sage/Papers/CGAglyph/CGAglyph.pdf]

Glyphs: InfoBug

software management



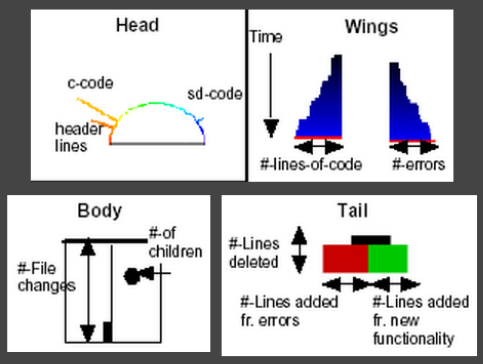

[Chuah et al, Information Rich Glyphs for Software Management, IEEE CG&A 18:4 1998,www.cs.cmu.edu/~sage/Papers/CGAglyph/CGAglyph.pdf]

Glyph small multiples: InfoBug

critique: separable/integral? salience?

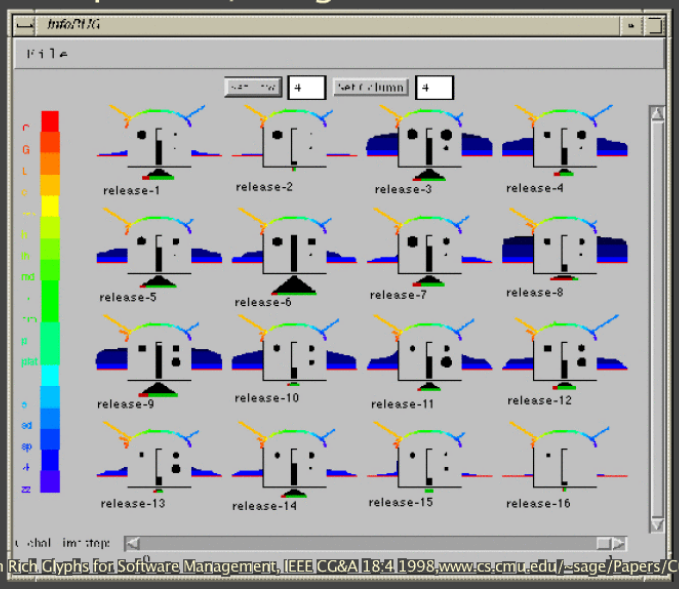

[Chuah et al, Information Rich Glyphs for Software Management, IEEE CG&A 18:4 1998,www.cs.cmu.edu/~sage/Papers/CGAglyph/CGAglyph.pdf]

Glyphs: Web sites

Web sites circa 1996 [Bray 1996]

- # pages: base diameter, # outlinks: globe diameter
- # inlinks: height, domain: hue

critique

- visual impact of volume changes

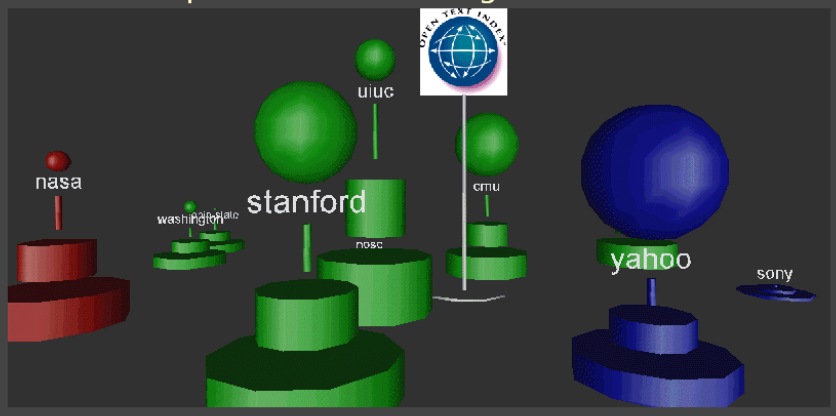

[Bray, Measuring the Web, WWW5, www5conf.inria.fr/fich_html/papers/P9/Overview.html]

Minimizing occlusion

bad: Midwestern occlusion

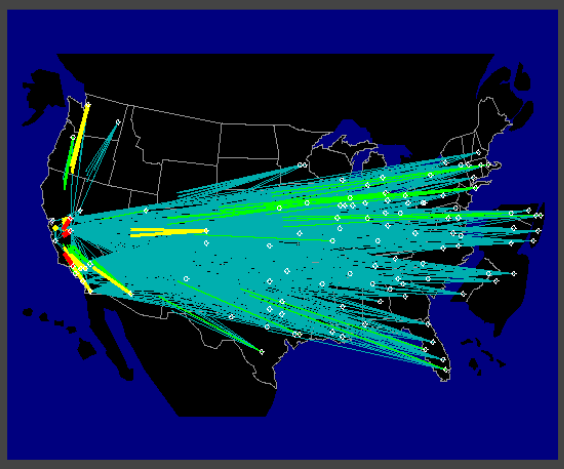

[citeseer.nj.nec.com/becker95visualizing.html]
[Becker, Eick, and Wilks. Visualizing Network Data, IEEE TVCG 1995]

Minimizing occlusion

good: show only start and end of lines

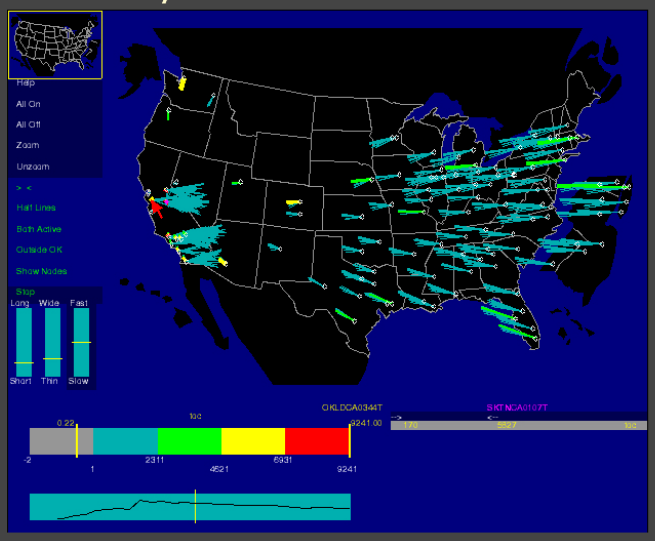

[citeseer.nj.nec.com/becker95visualizing.html]
[Becker, Eick, and Wilks. Visualizing Network Data, IEEE TVCG 1995]

Minimizing occlusion: 3D vs. 2D

bad: 3D pretty but not useful

- metacognitive gap: lose by adding dimension

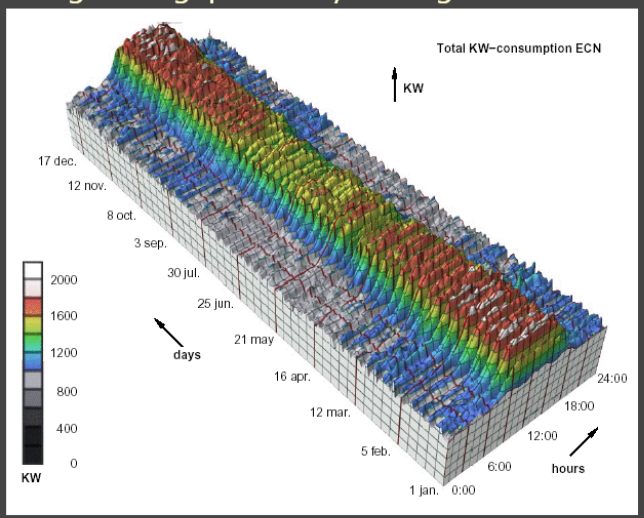

[van Wijk and van Selow, Cluster and Calender based Visualization of Time Series Data, InfoVis99,

Minimizing occlusion: 3D vs. 2D

good: 2D display of category clusters

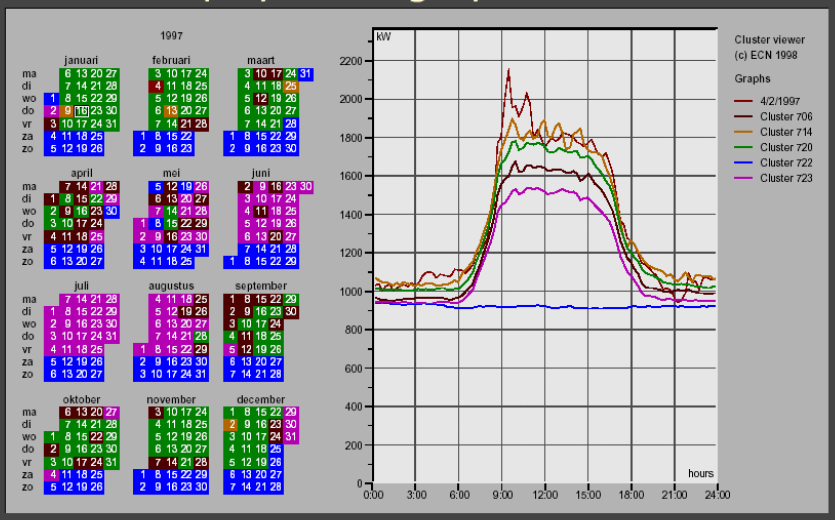

[van Wijk and van Selow, Cluster and Calender based Visualization of Time Series Data, InfoVis99, citeseer.nj.nec.com/vanwijk99cluster.html]

Motion: clarify structure

navigation

- rotate/translate/zoom





[www.psy.vanderbilt.edu/faculty/blake/biowalker.gif]

object recognition

- moving lights at joints
  Johannson 1973

animated transitions

- avoid change blindness
  jump increases cognitive load
- smooth transition from one state to next
  maintain object constancy

Outline

information visualization motivation

designing for humans

information visualization techniques

future directions

Future: scaling to huge datasets

data explosion

- sensors
  - Human Genome Project
  - Sloan Digital Sky Survey
- simulation
  - Accelerated Strategic Computing Initiative
  - microprocessor design
- logging
  - long-distance telephony backbone
  - Web traffic

Future: dynamic data

static
- hyperlink structure of entire Web

dynamic
- entire Web changing through time (Internet Archive)

open problem: incremental/online layout

- minimal visual changes: maintain user's mental model
- faithfully represent current state

Future: scaling display resolution

always pixel-bound in past

high-res displays now available
- 4K x 2K: 9Mpixels vs 1 Mpixel
- pixel rich

interactivity + resolution of paper
- add physical navigation (walk closer) to virtual navigation