

Decision Theory: Single Stage Decisions

Computer Science cpsc322, Lecture 33


(Textbook Chpt 9.2)

Nov 26, 2012

Lecture Overview

- **Intro**
- One-Off Decision Example
- Utilities / Preferences and optimal Decision
- Single stage Decision Networks

Planning in Stochastic Environments

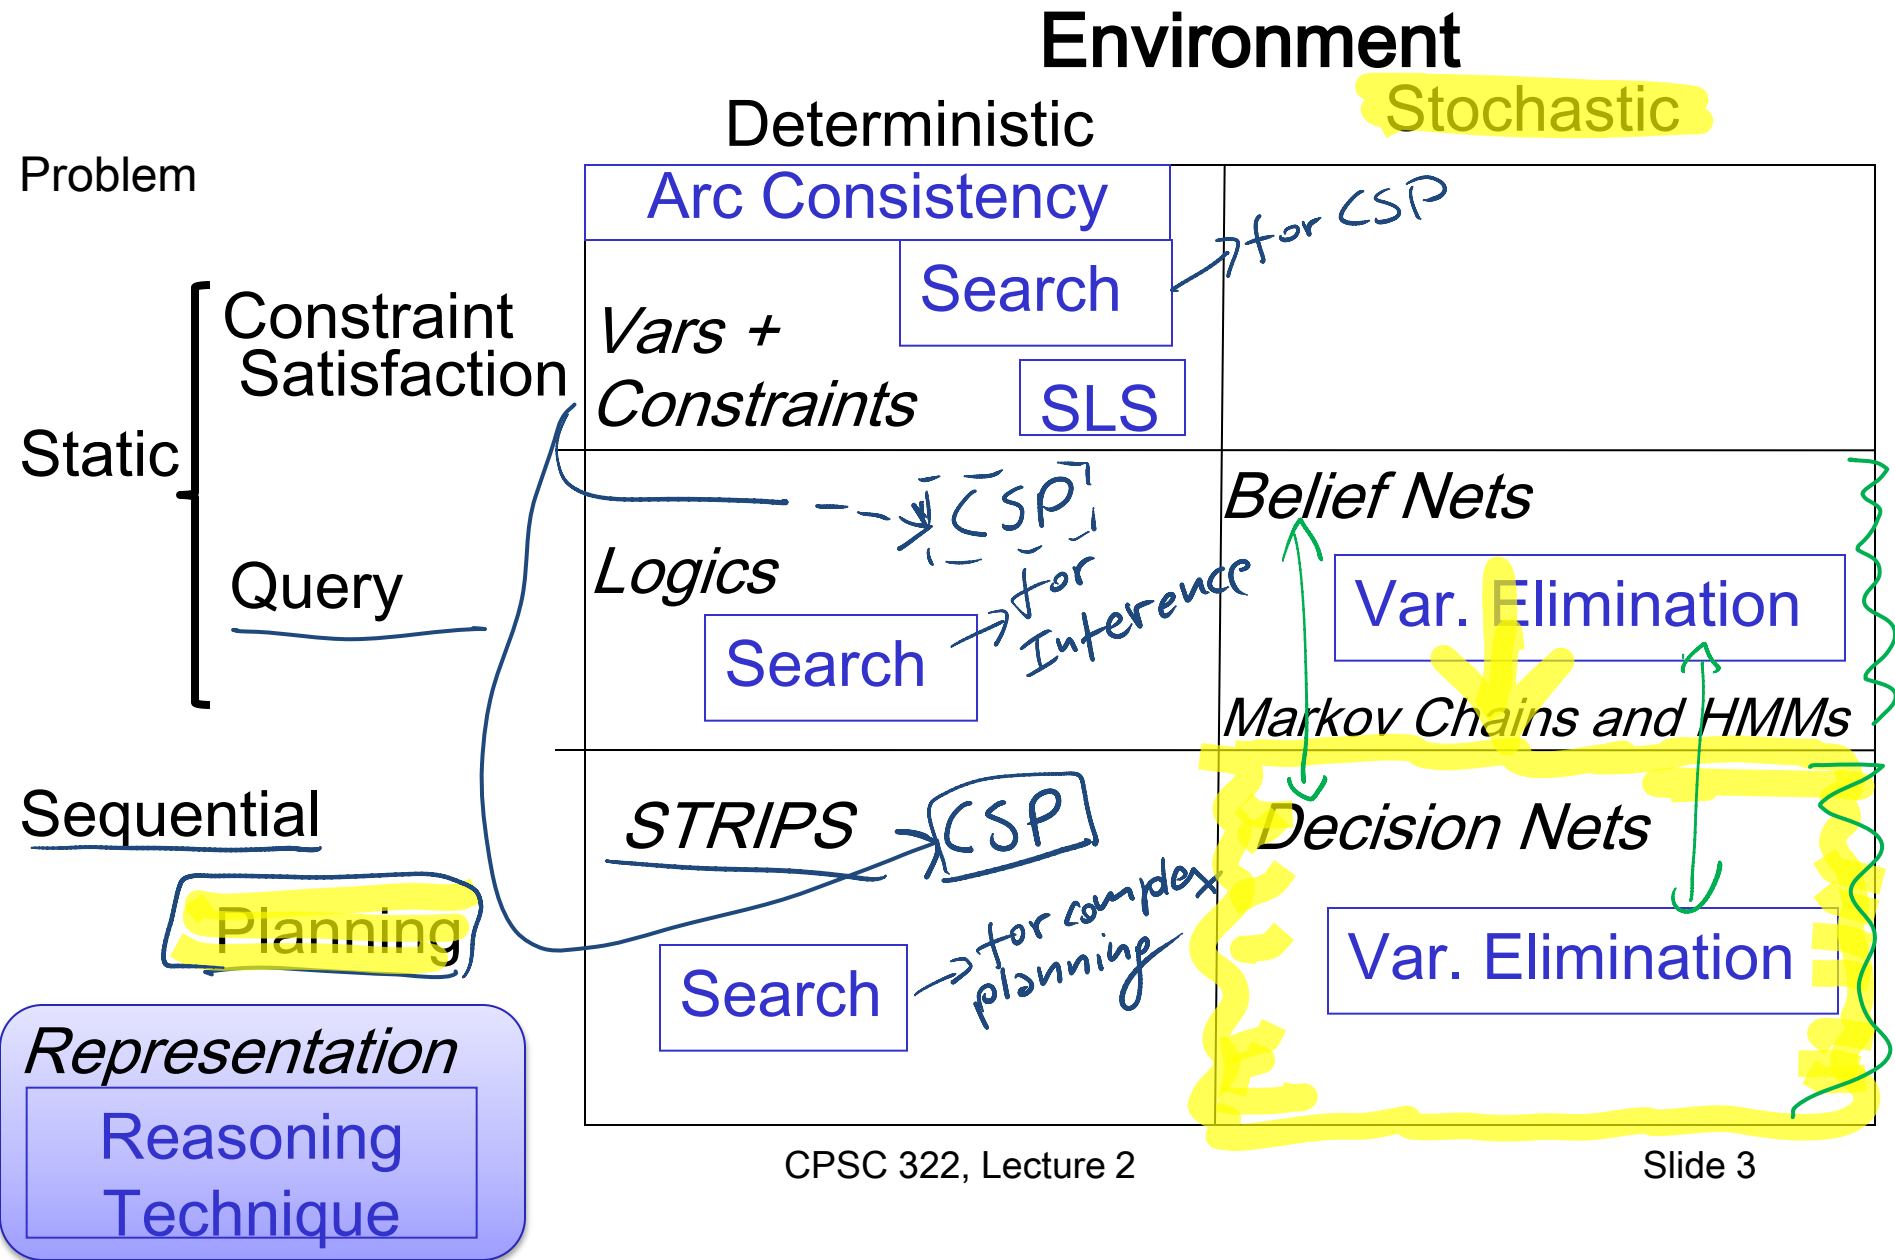






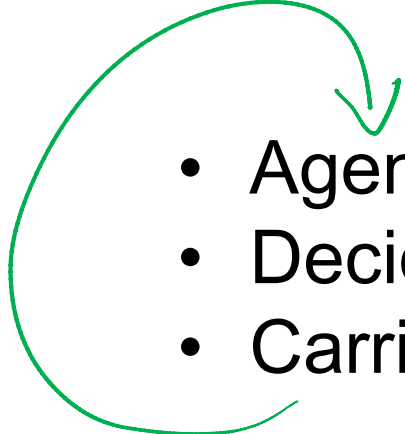
Planning Under Uncertainty: Intro

- **Planning** how to select and organize a sequence of actions/decisions to achieve a given goal.
- **Deterministic Goal:** A possible world in which some propositions are true
- **Planning under Uncertainty:** how to select and organize a sequence of actions/decisions to “maximize the probability” of “achieving a given goal”
- **Goal under Uncertainty:** we'll move from all-or-nothing goals to a richer notion: rating how *happy* the agent is in different possible worlds.

“Single” Action vs. Sequence of Actions

Set of primitive decisions that can be treated as **a single macro decision** to be made *before acting* one-off



- 
- 
- 
- 
- Agents makes observations
 - Decides on an action
 - Carries out the action
- 

Sequential
Decisions

Lecture Overview

- Intro
- One-Off Decision Example
- Utilities / Preferences and Optimal Decision
- Single stage Decision Networks } ←

One-off decision example

Delivery Robot Example

- Robot needs to reach a certain room
- Going through stairs may cause **an accident**.
- It can go** the **short way** through long stairs, or the **long way** through short stairs (that reduces the chance of an accident but takes more time)

Which
Way

long
short



$$P(A=t | WW=long) < P(A=t | WW=short)$$

- The Robot can **choose to wear pads** to protect itself **or not** (to protect itself in case of an accident) but pads slow it down

Wear
pads

t
f




$$1 + A = t$$



- If there is an accident the Robot does not get to the room

Decision Tree for Delivery Robot


- This scenario can be represented as the following **decision tree**

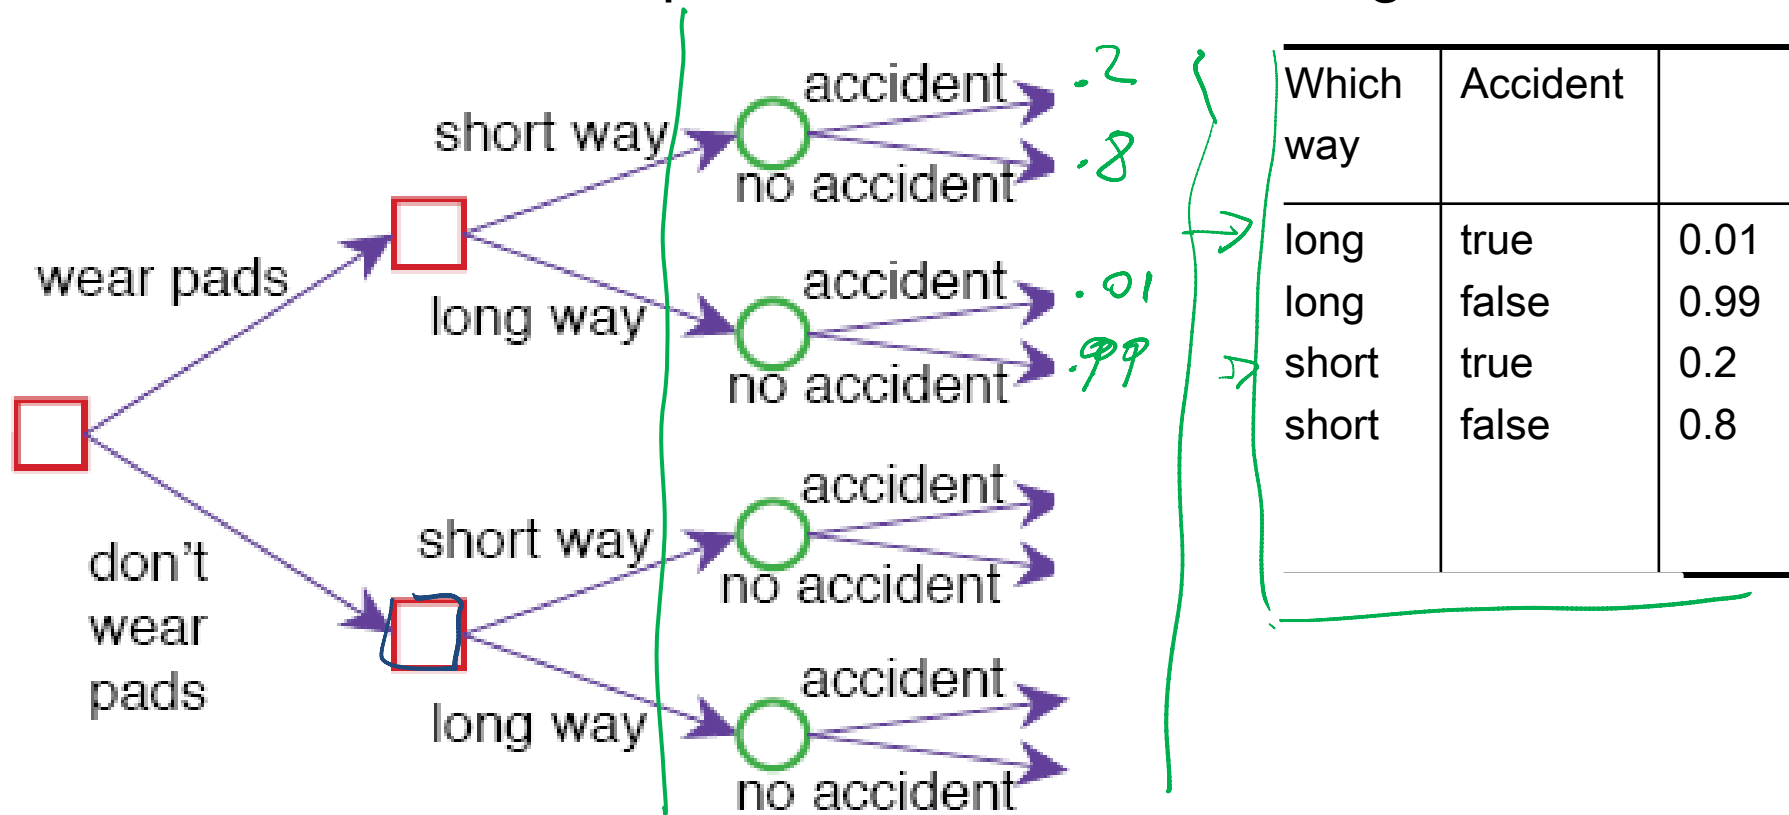

- The agent has a set of decisions to make (a macro-action it can perform)
- Decisions can influence random variables
- Decisions have probability distributions over outcomes

Decision Variables: Some general Considerations

- A possible world specifies a value for each random variable and each decision variable.
- For each assignment of values to all decision variables, the probabilities of the worlds satisfying that assignment sum to 1.

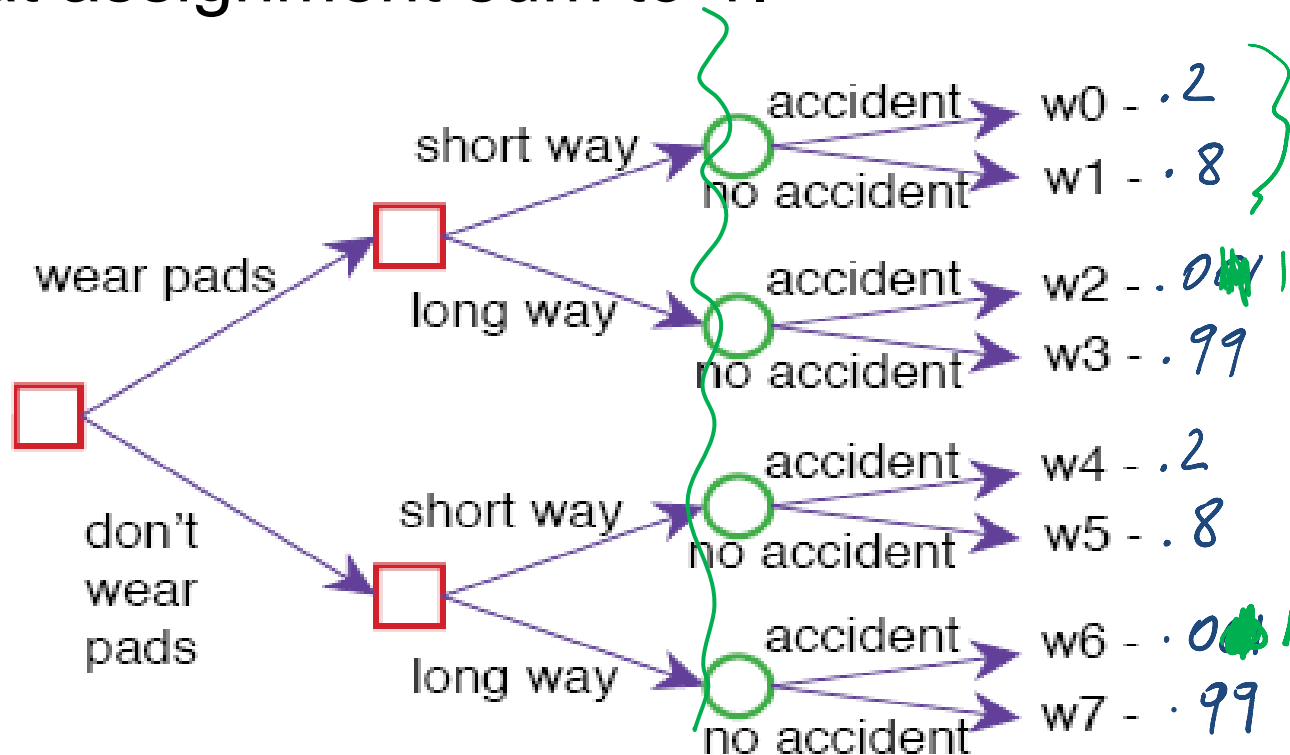


Lecture Overview

- Intro
- One-Off Decision Problems
- **Utilities / Preferences and Optimal Decision**
- Single stage Decision Networks

What are the optimal decisions for our Robot?

It all depends on how **happy** the agent is in different situations.

For sure getting to the room is better than not getting there..... but we need to consider other factors..

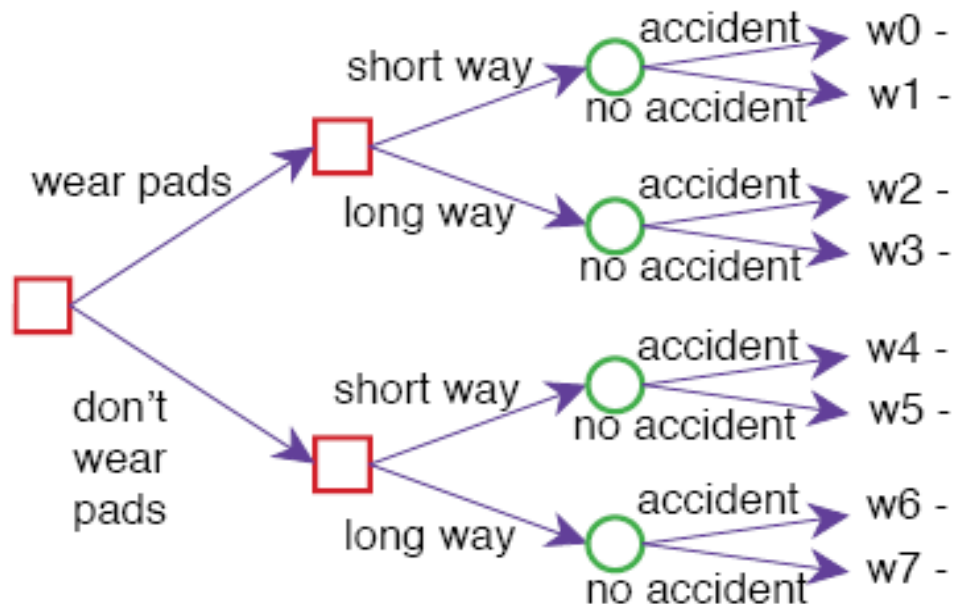

Utility / Preferences

Utility: a measure of desirability of possible worlds to an agent

- Let U be a real-valued function such that $U(w)$ represents an agent's degree of preference for world w . $[0, 100]$

Would this be a reasonable utility function for our Robot?

Which way	Accident	Wear Pads	Utility	World
short	true	true	35	w0, moderate damage
→ <u>short</u>	<u>false</u>	<u>true</u>	95	w1, reaches room, quick, extra weight
long	true	true	30	w2, moderate damage, low energy
long	false	true	75	w3, reaches room, slow, extra weight
short	true	false	3	w4, severe damage
→ <u>short</u>	<u>false</u>	<u>false</u>	<u>100</u>	w5, reaches room, quick
long	true	false	0	w6, severe damage, low energy
→ <u>long</u>	false	false	80	w7, reaches room, slow

Handwritten notes:
 - Green arrows point to the first three columns.
 - Green arrows point to the first, fourth, and seventh rows.
 - In the fourth row, 'short' is underlined, 'false' is underlined, and 'true' is circled.
 - In the seventh row, 'short' is underlined, 'false' is underlined, and '100' is circled.
 - In the seventh row, 'true' is written next to 'false' and 'false' is written below 'true'.
 - In the eighth row, 'true' is written next to 'false' and 'false' is written below 'true'.
 - 'Best' is written next to w5.
 - 'Worst?' is written next to w6.

Utility: Simple Goals

- Can simple (boolean) goals still be specified?


goal: "reaching the room"

Accident
must be
false

Which way	Accident	Wear Pads	Utility
long	true	true	0
long	true	false	0
long	false	true	100
long	false	false	100
short	true	true	0
short	true	false	0
short	false	true	100
short	false	false	100

Optimal decisions: How to combine Utility with Probability

What is the **utility** of achieving a certain **probability distribution** over **possible worlds**?

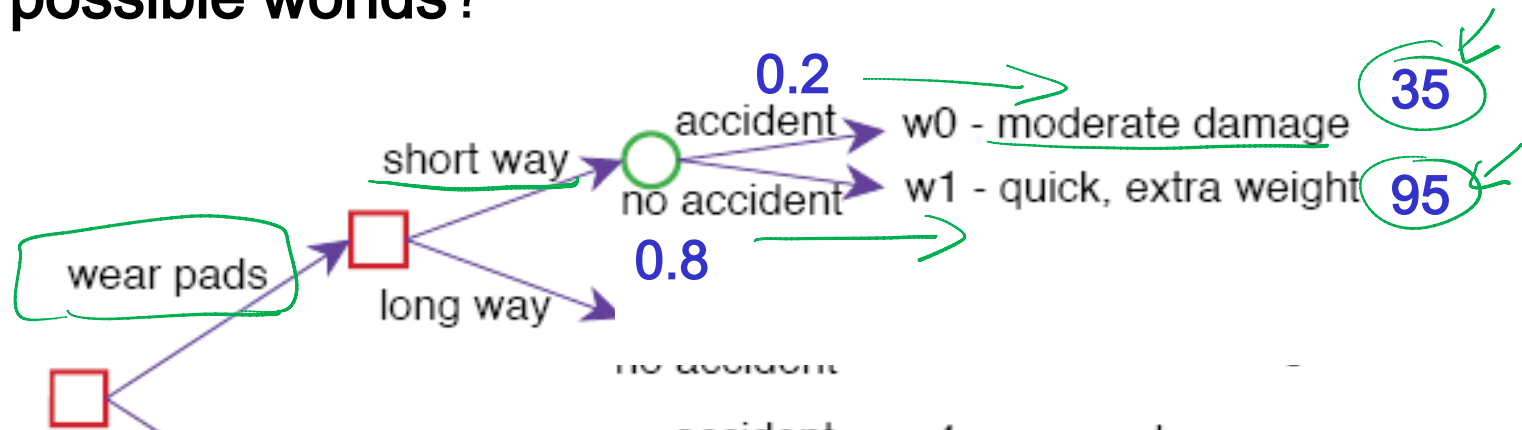

- It is its expected utility/value i.e., its average utility, weighting possible worlds by their probability.


$$EU(wP=t, wW=short) =$$

$$.2 \times 35 + .8 \times 95$$

Optimal decision in one-off decisions

- Given a set of n decision variables var_i (e.g., Wear Pads, Which Way), the agent can choose:

$D = d_i$ for any $d_i \in \text{dom}(var_1) \times \dots \times \text{dom}(var_n)$

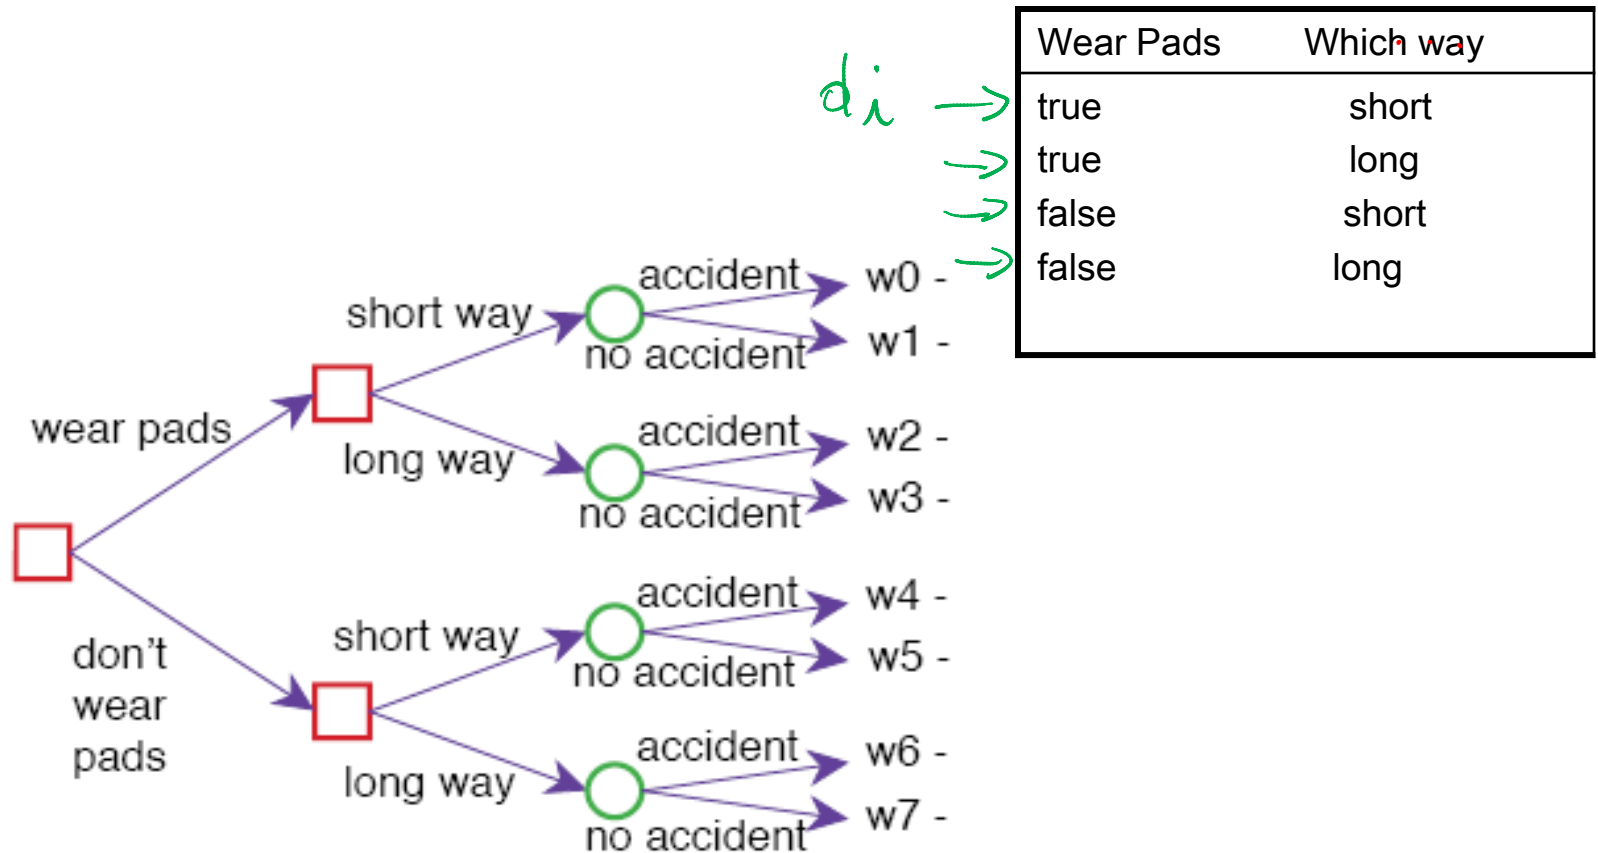


Optimal decision: Maximize Expected Utility

- The **expected utility** of decision $D = d_i$ is

$$\mathbb{E}(U \mid D = d_i) = \sum_{w \mid D = d_i} P(w \mid D = d_i) U(w)$$

e.g., $\mathbb{E}(U \mid D = \{WP = \text{false}, WW = \text{short}\}) =$

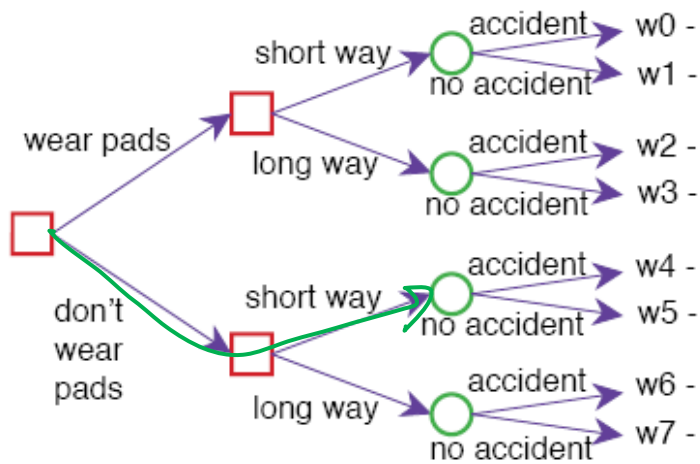

$$P(w_4 \mid D) * U(w_4) + P(w_5 \mid D) * U(w_5)$$

- An **optimal decision** is the decision $D = d_{\max}$ whose expected utility is maximal:

$$d_{\max} = \arg \max_{d_i \in \text{dom}(D)} \mathbb{E}(U \mid D = d_i)$$

Wear Pads	Which way	EU
true	short	—
true	long	—
false	short	—
false	long	—

max


Expected utility of a decision

- The **expected utility** of decision $D = d_i$ is

$$E(U | D = d_i) = \sum_{w \models (D = d_i)} P(w) U(w)$$

- What is the **expected utility** of Wearpads=yes, Way=short ?

$$0.2 * 35 + 0.8 * 95 = 83$$

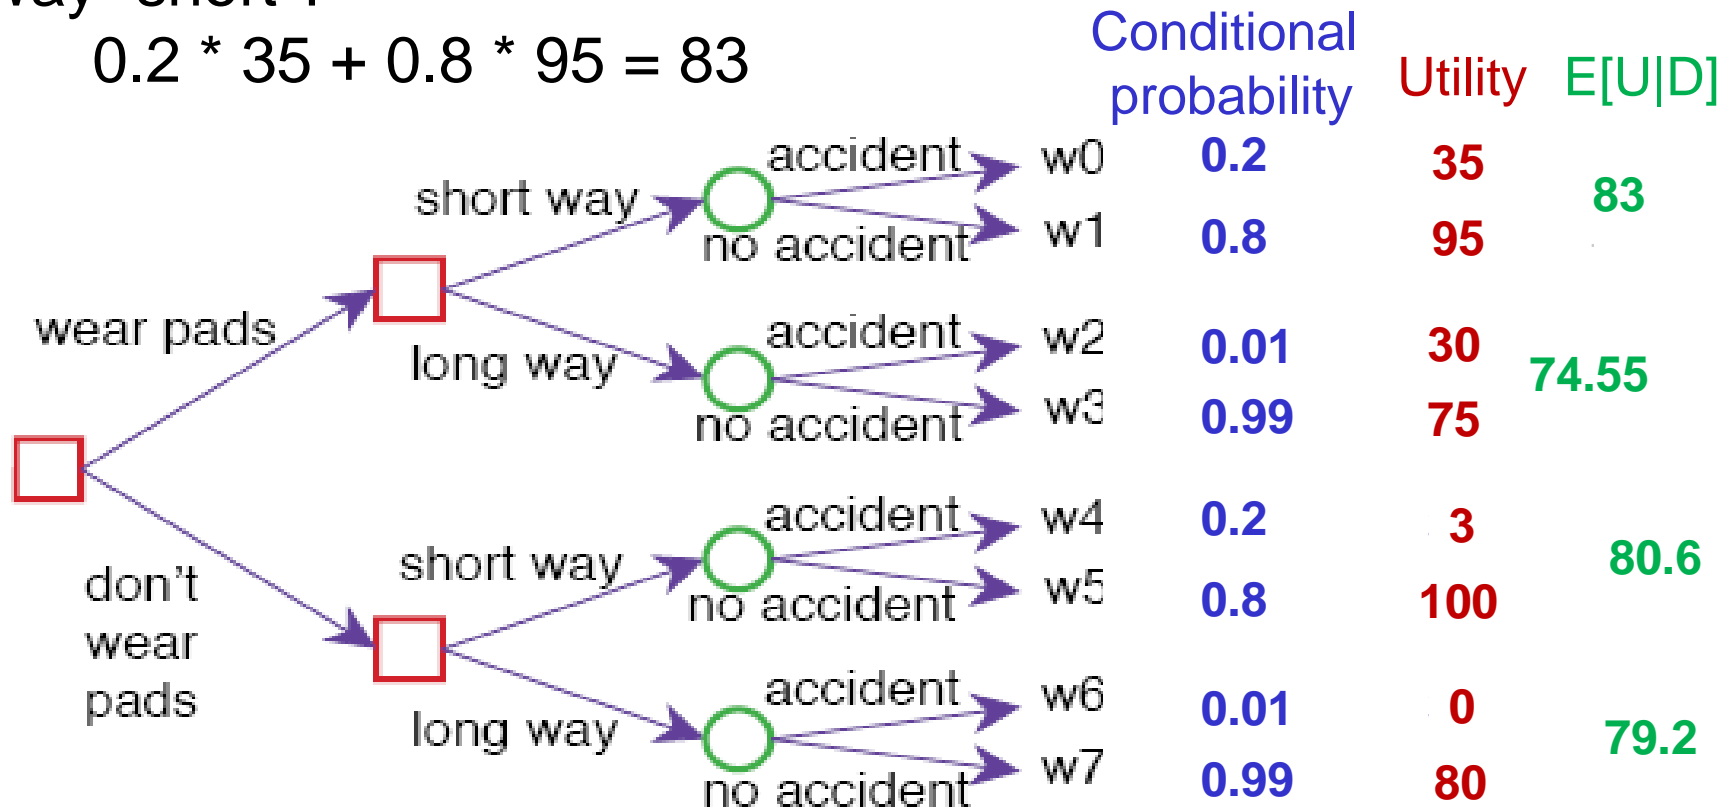

Lecture Overview


- Intro
- One-Off Decision Problems
- Utilities / Preferences and Optimal Decision
- **Single stage Decision Networks**

Single-stage decision networks

Extend belief networks with:

- **Decision nodes**, that the agent chooses the value for. Drawn as rectangle.
- **Utility node**, the parents are the variables on which the utility depends. Drawn as a diamond.
- Shows explicitly which decision nodes affect random variables

Which way	Accident	
long	true	0.01
long	false	0.99
short	true	0.2
short	false	0.8

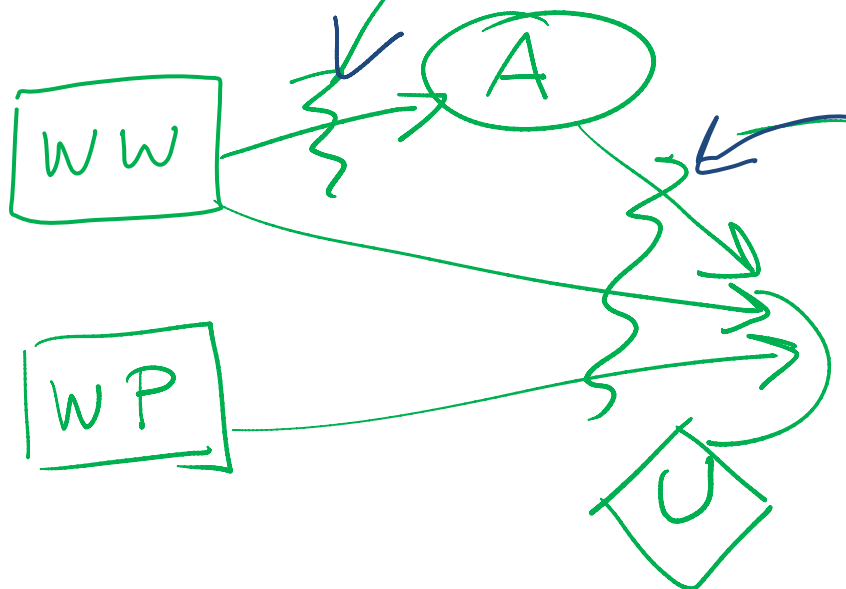

Which way	Accident	Wear Pads	Utility
long	true	true	30
long	true	false	0
long	false	true	75
long	false	false	80
short	true	true	35
short	true	false	3
short	false	true	95
short	false	false	100

Finding the optimal decision: We can use VE

Suppose the random variables are X_1, \dots, X_n , the decision variables are the set D , and utility depends on


$$pU \subseteq \{X_1, \dots, X_n\} \cup D$$

parents U

$$E(U|D) = \sum_{X_1, \dots, X_n} P(X_1, \dots, X_n | D) U(pU)$$

$$= \sum \prod P(x_i | p x_i) U(pU)$$


also includes decision vars

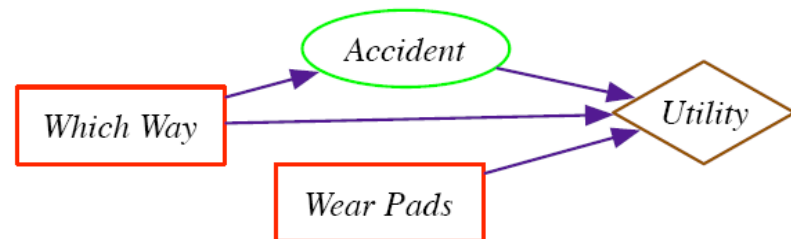

To find the optimal decision we can use VE:

1. Create a factor for each conditional probability and for the utility
2. Multiply factors and sum out all of the random variables (This creates a factor on D that gives the expected utility for each d_i)
3. Choose the d_i with the maximum value in the factor.


Example Initial Factors (Step1)

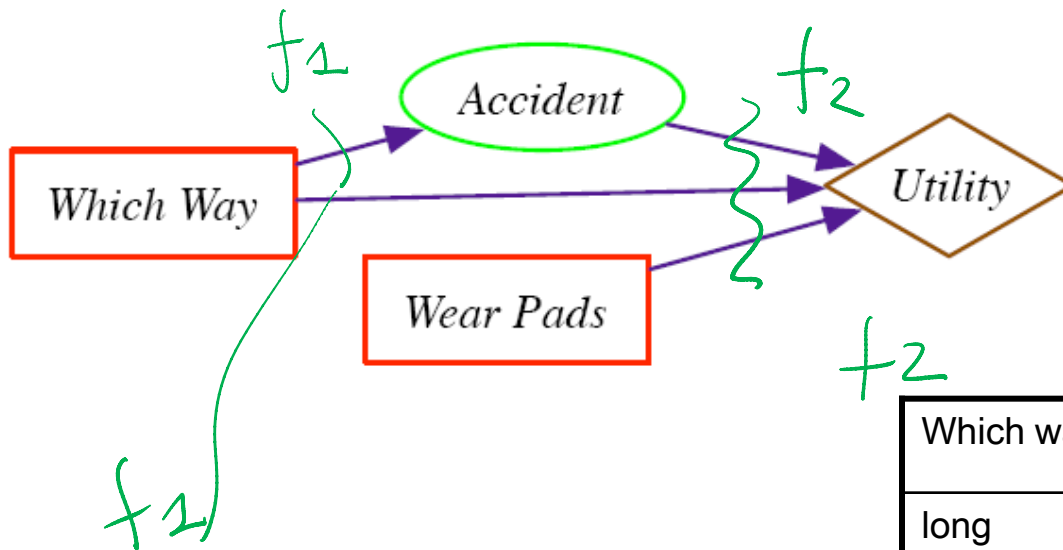

Which way	Accident	Probability
long	true	0.01
long	false	0.99
short	true	0.2
short	false	0.8

Which way	Accident	Wear Pads	Utility
long	true	true	30
long	true	false	0
long	false	true	75
long	false	false	80
short	true	true	35
short	true	false	3
short	false	true	95
short	false	false	100

Example: Multiply Factors (Step 2a)

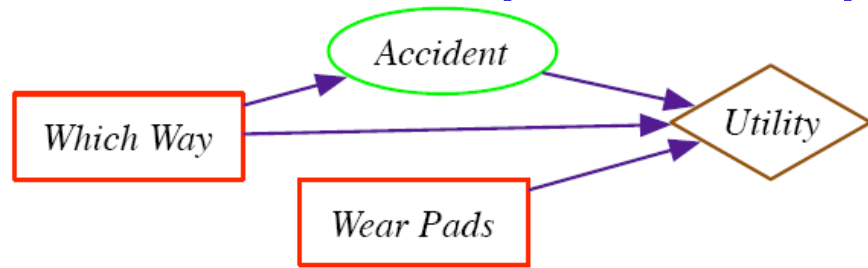


$$\sum_A f_1(WW, A) \times f_2(A, WW, WP)$$

Which way	Accident	Probability
long	true	0.01
long	false	0.99
short	true	0.2
short	false	0.8

Which way	Accident	Wear Pads	Utility
long	true	true	30
long	true	false	0
long	false	true	75
long	false	false	80
short	true	true	35
short	true	false	3
short	false	true	95
short	false	false	100

Which way	Accident	Wear Pads	Utility
long	true	true	30 * .01
long	true	false	0 * .01
long	false	true	75 * .99
long	false	false	80
short	true	true	35
short	true	false	3
short	false	true	95
short	false	false	100

Example: Sum out vars and choose max (Steps 2b-3)

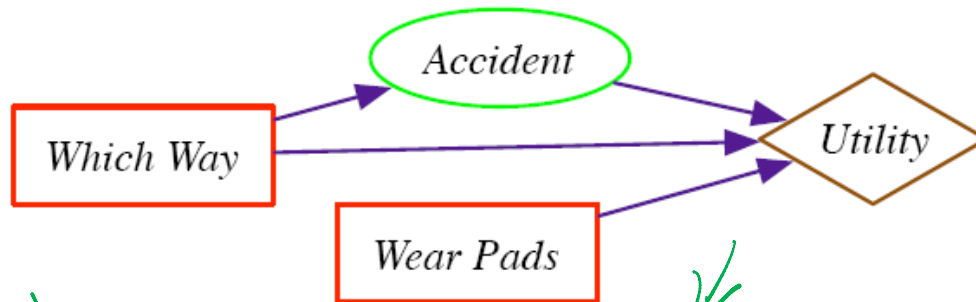

$$\sum_A f'(A, WW, WP)$$

Sum out accident:

Which way	Accident	Wear Pads	Utility
long	true	true	0.01*30
long	true	false	0.01*0
long	false	true	0.99*75
long	false	false	0.99*80
short	true	true	0.2*35
short	true	false	0.2*3
short	false	true	0.8*95
short	false	false	0.8*100

Which way	Wear Pads	Expected Utility
long	true	0.01*30+0.99*75=74.55
long	false	0.01*0+0.99*80=79.2
short	true	0.2*35+0.8*95=83
short	false	0.2*3+0.8*100=80.6



Thus the optimal policy is to take the **short way** and **wear pads**, with an *expected utility* of 83.

Learning Goals for today's class

You can:

- Compare and contrast stochastic **single-stage (one-off)** decisions vs. **multistage** decisions
- Define a **Utility Function** on possible worlds
- Define and compute **optimal one-off decision** (max expected utility)
- Represent one-off decisions as **single stage decision networks** and compute optimal decisions by **Variable Elimination**

Next Class (textbook sec. 9.3)

Set of primitive decisions that can be treated as **a single macro decision** to be made *before acting*

Sequential Decisions

- Agents makes observations
- Decides on an action
- Carries out the action

Course Elements

Homework #4, due date: Fri Nov 30, 1PM.

You can drop it at my office (ICICS 105) or by handin.

For Q5 you need material from the last lecture, so work on the rest before then.

Work on Practice Exercise 9.A

Please Complete Teaching Evaluations

Teaching Evaluation Surveys will close on Tuesday, December 4th