

CPSC 440: Advanced Machine Learning

Undirected Graphical Models

Mark Schmidt

University of British Columbia


Winter 2021

Last Time: Learning and Inference in DAGs

- **Learning in DAG** models:
 - Given a graph structure, parameter estimation is modeling $p(x_j \mid x_{\text{pa}(j)})$.
 - We can use counting, or any method for supervised learning.
 - If we don't have the graph structure, common to use greedy “search and score”.
- **Inference in DAG** models:
 - Inference tasks (decoding/marginalization/conditioning) are easy in trees.
 - Where we have at most one parent.
 - In non-trees, dynamic programming can be much more expensive.
 - We'll discuss approximations soon.
- We motivated looking at **undirected graphical models** (UGMs):
 - Can make more sense if the variables don't have a natural “ordering”.

Multi-Label Classification

- Consider automated heart wall abnormality detection:

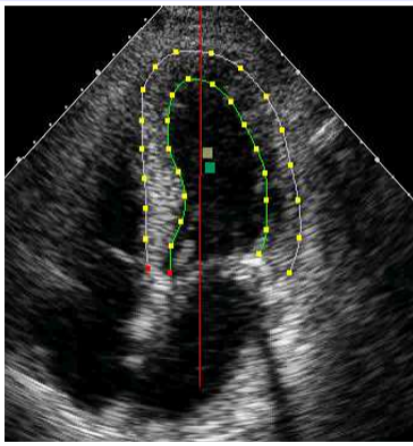

- Want to model if any of 16 areas of the heart are not moving properly.
 - Can potentially improve predictions by modeling correlations.

Ising Models from Statistical Physics (MEMORIZE)

- The **Ising** model for **binary** x_i is defined by

$$p(x_1, x_2, \dots, x_d) \propto \exp \left(\sum_{i=1}^d x_i w_i + \sum_{(i,j) \in E} x_i x_j w_{ij} \right),$$

where E is the set of **edges in an undirected graph**.

- Called a **log-linear** model, because $\log p(x)$ is **linear** plus a constant.
- Consider using $x_i \in \{-1, 1\}$:
 - If $w_i > 0$ it encourages $x_i = 1$.
 - If $w_{ij} > 0$ it **encourages neighbours i and j to have the same value**.
 - E.g., neighbouring pixels in the image receive the same label (“attractive” model)
- We’re modeling dependencies, but haven’t assumed an “ordering”.
 - We often learn the w_i and w_{ij} from data.
 - Later, we’ll see how these **could be output by a neural network**.

Undirected Graphical Models (MEMORIZE)

- Pairwise **undirected graphical models (UGMs)** assume $p(x)$ has the form

$$p(x) \propto \left(\prod_{j=1}^d \phi_j(x_j) \right) \left(\prod_{(i,j) \in E} \phi_{ij}(x_i, x_j) \right).$$

- The ϕ_j and ϕ_{ij} functions are called **potential functions**:
 - They can be **any non-negative function**.
 - **Ordering doesn't matter**: more natural for things like pixels of an image.
- **Ising model is a special case** where

$$\phi_i(x_i) = \exp(x_i w_i), \quad \phi_{ij}(x_i, x_j) = \exp(x_i x_j w_{ij}).$$

- Bonus slides generalize Ising to non-binary case.

Gaussians as Undirected Graphical Models

- Multivariate Gaussian can be written as

$$p(x) \propto \exp\left(-\frac{1}{2}(x - \mu)^T \Sigma^{-1}(x - \mu)\right) \propto \exp\left(-\frac{1}{2}x^T \Sigma^{-1}x + x^T \underbrace{\Sigma^{-1}\mu}_v\right),$$


and writing it in summation notation we can see that it's a **pairwise UGM**:

$$\begin{aligned} p(x) &\propto \exp\left(-\frac{1}{2} \sum_{i=1}^d \sum_{j=1}^d x_i x_j (\Sigma^{-1})_{ij} + \sum_{i=1}^d x_i v_i\right) \\ &= \left(\prod_{i=1}^d \prod_{j=1}^d \underbrace{\exp\left(-\frac{1}{2} x_i x_j (\Sigma^{-1})_{ij}\right)}_{\phi_{ij}(x_i, x_j)} \right) \left(\prod_{i=1}^d \underbrace{\exp(x_i v_i)}_{\phi_i(x_i)} \right) \end{aligned}$$

- Above we include all edges. You can “remove” edges by setting $(\Sigma^{-1})_{ij} = 0$.
- “Gaussian graphical model” (GGM) or “Gaussian Markov random field” (GMRF).

Conditional Independence in Undirected Graphical Models

- It's easy to check **conditional independence** in UGMs:
 - $A \perp B \mid C$ if C **blocks all paths** from any A to any B .
- Example:

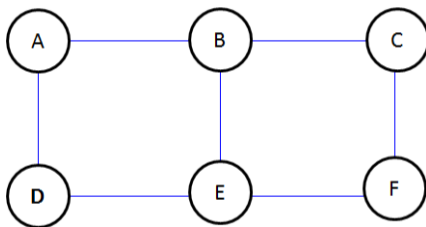

- $A \not\perp C$.
- $A \not\perp C \mid B$.
- $A \perp C \mid B, E$.
- $A, B \not\perp F \mid C$
- $A, B \perp F \mid C, E$.

Independence in Gaussians

- Independence in multivariate Gaussian:
 - In Gaussians, marginal independence is determined by covariance:

$$x_i \perp x_j \Leftrightarrow \Sigma_{ij} = 0,$$

(we previously saw diagonal Σ means all x_i independent).

- Gaussians are pairwise UGMs with $\phi_{ij}(x_i, x_j) = \exp\left(-\frac{1}{2}x_i x_j \Theta_{ij}\right)$,
 - Where Θ_{ij} is element (i, j) of Σ^{-1} .
- So conditional independence is determined by precision matrix sparsity.
 - Diagonal Θ gives disconnected graph: all variables are independent.
 - Full Θ gives fully-connected graph: there are no conditional independences.
- If $\Theta_{ij} \neq 0$ we have an edge in the UGM (direct dependency between x_i and x_j).
 - Related to partial correlation which is $-\Theta_{ij} / \sqrt{\Theta_{ii}\Theta_{jj}}$.
 - The “correlation after controlling for other variables”.

Independence in GGMs

- Consider a Gaussian with the following covariance matrix:

$$\Sigma = \begin{bmatrix} 0.0494 & -0.0444 & -0.0312 & 0.0034 & -0.0010 \\ -0.0444 & 0.1083 & 0.0761 & -0.0083 & 0.0025 \\ -0.0312 & 0.0761 & 0.1872 & -0.0204 & 0.0062 \\ 0.0034 & -0.0083 & -0.0204 & 0.0528 & -0.0159 \\ -0.0010 & 0.0025 & 0.0062 & -0.0159 & 0.2636 \end{bmatrix}$$

- $\Sigma_{ij} \neq 0$ so **all variables are dependent**: $x_1 \not\perp x_2$, $x_1 \not\perp x_5$, and so on.
 - This would show up in graph: you would be able to reach any x_i from any x_j .
- The inverse is given by a **tri-diagonal matrix**:

$$\Sigma^{-1} = \begin{bmatrix} 32.0897 & 13.1740 & 0 & 0 & 0 \\ 13.1740 & 18.3444 & -5.2602 & 0 & 0 \\ 0 & -5.2602 & 7.7173 & 2.1597 & 0 \\ 0 & 0 & 2.1597 & 20.1232 & 1.1670 \\ 0 & 0 & 0 & 1.1670 & 3.8644 \end{bmatrix}$$

- So **conditional independence is described by a Markov chain**:

$$p(x_1 \mid x_2, x_3, x_4, x_5) = p(x_1 \mid x_2).$$

Graphical Lasso

- Conditional independence in Gaussians is described by sparsity in $\Theta = \Sigma^{-1}$.
 - Setting a Θ_{ij} to 0 removes an edge from the graph.

- Recall fitting multivariate Gaussian with L1-regularization,

$$\operatorname{argmin}_{\Theta \succ 0} \operatorname{Tr}(S\Theta) - \log |\Theta| + \lambda \|\Theta\|_1,$$

which is called the graphical Lasso because it encourages a sparse graph.

- Graphical Lasso is a convex approach to structure learning for GGMs.
 - Examples: <https://normaldeviate.wordpress.com/2012/09/17/high-dimensional-undirected-graphical-models>.

Higher-Order Undirected Graphical Models

- In UGMs, we can also define potentials on **higher-order interactions**.
 - A three-variable generalization of Ising potentials is:

$$\phi_{ijk}(x_i, x_j, x_k) = w_{ijk}x_i x_j x_k.$$

- If $w_{ijk} > 0$ and $x_j \in \{0, 1\}$, encourages you to set all three to 1.
 - If $w_{ijk} > 0$ and $x_j \in \{-1, 1\}$, encourages odd number of positives.
- In the general case, a UGM just assumes $p(x)$ **factorizes over subsets c** ,


$$p(x_1, x_2, \dots, x_d) \propto \prod_{c \in \mathcal{C}} \phi_c(x_c),$$

from among a collection of subsets of \mathcal{C} .


- In this case, graph has edge (i, j) if **i and j are together in at least one c** .
 - Conditional independences are still given by graph separation.

Factor Graphs

- **Factor graphs** are a way to visualize UGMs that distinguishes different orders.
 - Use circles for variables, squares to represent dependencies.
- Factor graph of $p(x_1, x_2, x_3) \propto \phi_{12}(x_1, x_2)\phi_{13}(x_1, x_3)\phi_{23}(x_2, x_3)$:



- Factor graph of $p(x_1, x_2, x_3) \propto \phi_{123}(x_1, x_2, x_3)$:



Outline

- 1 Undirected Graphical Models
- 2 Tractability of Graphical Model Inference

Tractability of UGMs

- Without using α , a UGM probability would be

$$p(x) = \frac{1}{Z} \prod_{c \in \mathcal{C}} \phi_c(x_c),$$

where Z is the constant that makes the probabilities sum up to 1.

$$Z = \sum_{x_1} \sum_{x_2} \cdots \sum_{x_d} \prod_{c \in \mathcal{C}} \phi_c(x_c) \quad \text{or} \quad Z = \int_{x_1} \int_{x_2} \cdots \int_{x_d} \prod_{c \in \mathcal{C}} \phi_c(x_c) dx_d dx_{d-1} \cdots dx_1.$$

- Whether you can compute Z depends on the choice of the ϕ_c :
 - Gaussian case: $O(d^3)$ in general, but $O(d)$ for forests (no loops).
 - Continuous non-Gaussian: usually requires numerical integration.
 - Discrete case: #P-hard in general, but $O(dk^2)$ for forests (no loops).

Discrete DAGs vs. Discrete UGMs

- Common **inference tasks** in graphical models:
 - ① Compute $p(x)$ for an assignment to the variables x .
 - ② Generate a **sample** x from the distribution.
 - ③ Compute **univariate marginals** $p(x_j)$.
 - ④ Compute **decoding** $\operatorname{argmax}_x p(x)$.
 - ⑤ Compute **univariate conditional** $p(x_j \mid x_{j'})$.
- With discrete x_i , all of the above are easy in **tree-structured graphs**.
 - For DAGs, a tree-structured graph has **at most one parent**.
 - For UGMs, a tree-structured graph has **no cycles**.
- With discrete x_i , the above may be harder for **general graphs**:
 - In DAGs the first two are easy, the others are NP-hard.
 - In **UGMs all of these are NP-hard**.


Moralization: Converting DAGs to UGMs

- To address the NP-hard problems, DAGs and UGMs use same techniques.
- We'll focus on UGMs, but we can convert DAGs to UGMs:

$$p(x_1, x_2, \dots, x_d) = \prod_{j=1}^d p(x_j | x_{\text{pa}(j)}) = \prod_{j=1}^d \underbrace{\phi_j(x_j, x_{\text{pa}(j)})}_{=p(x_j | x_{\text{pa}(j)})},$$

which is a UGM with $Z = 1$.

- Graphically: we drop directions and “marry” parents ([moralization](#)).

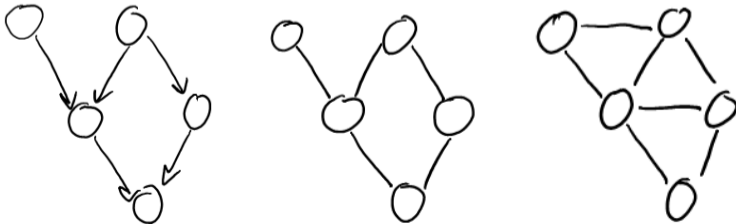

- May lose some conditional independences, but doesn't change computational cost.

Summary

- **Undirected graphical models** factorize probability into non-negative potentials.
 - Gaussians are a special case.
 - Log-linear models (like Ising) are a common choice.
 - Simple conditional independence properties.
 - Can place potentials on any subset of variables.
- **Tractability of inference** in discrete graphical models:
 - Everything is easy in forests.
 - Sampling and joint probability are easy in DAGs, everything else is hard.
 - Everything is hard in UGMs.
- **Moralization of DAGs** to do decoding/inference/sampling as a UGM.
- Next time: our first visit to the wild world of approximate inference.

General Pairwise UGM

- For general **discrete** x_i a generalization of Ising models is

$$p(x_1, x_2, \dots, x_d) = \frac{1}{Z} \exp \left(\sum_{i=1}^d w_{i,x_i} + \sum_{(i,j) \in E} w_{i,j,x_i,x_j} \right),$$

which can represent any “positive” pairwise UGM (meaning $p(x) > 0$ for all x).

- Interpretation of weights for this UGM:
 - If $w_{i,1} > w_{i,2}$ then we prefer $x_i = 1$ to $x_i = 2$.
 - If $w_{i,j,1,1} > w_{i,j,2,2}$ then we prefer $(x_i = 1, x_j = 1)$ to $(x_i = 2, x_j = 2)$.
- As before, we can use **parameter tying**:
 - We could use the same w_{i,x_i} for all positions i .
 - Ising model corresponds to a particular parameter tying of the w_{i,j,x_i,x_j} .

Label Propagation (Graph-Based Semi-Supervised) as a UGM

- Consider modeling the probability of a vector of labels $\bar{y} \in \mathbb{R}^t$ using

$$p(\bar{y}^1, \bar{y}^2, \dots, \bar{y}^t) \propto \exp \left(- \sum_{i=1}^n \sum_{j=1}^t w_{ij} (y^i - \bar{y}^i)^2 - \frac{1}{2} \sum_{i=1}^t \sum_{j=1}^t \bar{w}_{ij} (\bar{y}^i - \bar{y}^j)^2 \right).$$

- Decoding in this model is the **label propagation** problem.
- This is a **pairwise UGM**:

$$\phi_j(\bar{y}^j) = \exp \left(- \sum_{i=1}^n w_{ij} (y^i - \bar{y}^j)^2 \right), \quad \phi_{ij}(\bar{y}^i, \bar{y}^j) = \exp \left(- \frac{1}{2} \bar{w}_{ij} (\bar{y}^i - \bar{y}^j)^2 \right).$$

Decomposable Graphical Models

- Probabilities whose conditional independences that can be perfectly represented as DAGs *and* UGMs are called **decomposable**.
 - Includes chains, trees, and fully-connected graphs.
- These models allow some efficient operations in UGMs by writing them as DAGs:
 - Computing $p(x)$.
 - Ancestral sampling.
 - Fitting parameters independently.

Other Graphical Models

- **Factor graphs**: we use a square between variables that appear in same factor.
 - Can distinguish between a 3-way factor and 3 pairwise factors.
- **Chain-graphs**: DAGs where each block can be a UGM.
- **Ancestral-graph**:
 - Generalization of DAGs that is closed under conditioning.
- **Structural equation models (SEMs)**: generalization of DAGs that allows cycles.