



Rendering Pipeline, OpenGL/GLUT

<http://www.ugrad.cs.ubc.ca/~cs314/Vjan2013>

Today's Readings

- today
 - RB Chap Introduction to OpenGL
 - RB Chap State Management and Drawing Geometric Objects
 - RB App Basics of GLUT (Aux in v 1.1)
- RB = Red Book = OpenGL Programming Guide
- <http://fly.cc.fer.hr/~unreal/theredbook/>



2

Rendering Pipeline

- goal
 - transform computer models into images
 - may or may not be photo-realistic
- interactive rendering
 - fast, but limited quality
 - roughly follows a fixed pattern of operations
 - rendering pipeline
- offline rendering
 - ray tracing
 - global illumination

3

4

Rendering

- tasks that need to be performed (in no particular order):
 - project all 3D geometry onto the image plane
 - geometric transformations
 - determine which primitives or parts of primitives are visible
 - hidden surface removal
 - determine which pixels a geometric primitive covers
 - scan conversion
 - compute the color of every visible surface point
 - lighting, shading, texture mapping


5

Rendering Pipeline

- what is the pipeline?
 - abstract model for sequence of operations to transform geometric model into digital image
 - abstraction of the way graphics hardware works
 - underlying model for application programming interfaces (APIs) that allow programming of graphics hardware
 - OpenGL
 - Direct 3D
- actual implementation details of rendering pipeline will vary

6


Rendering Pipeline

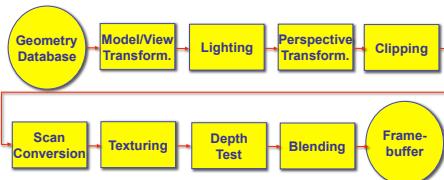

7

8


Model/View Transformation

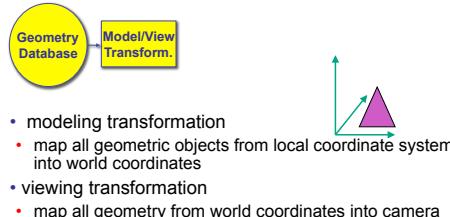

- modeling transformation
 - map all geometric objects from local coordinate system into world coordinates
- viewing transformation
 - map all geometry from world coordinates into camera coordinates

9


Lighting

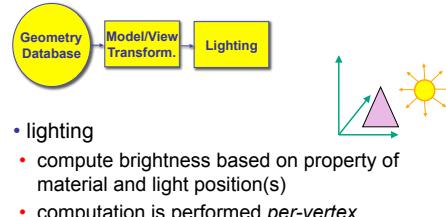

- lighting
 - compute brightness based on property of material and light position(s)
 - computation is performed *per-vertex*

10

Perspective Transformation

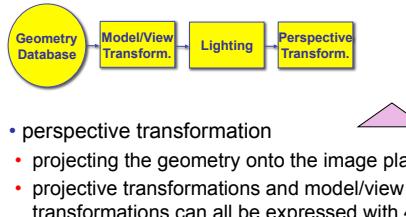


- perspective transformation
 - projecting the geometry onto the image plane
 - projective transformations and model/view transformations can all be expressed with 4x4 matrix operations

11


12

Clipping

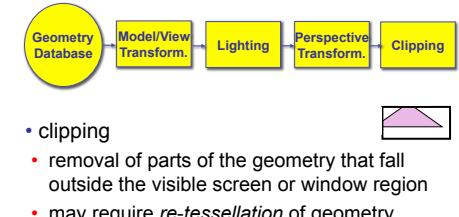

- clipping
 - removal of parts of the geometry that fall outside the visible screen or window region
 - may require *re-tessellation* of geometry


Scan Conversion

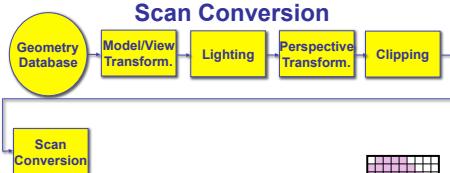

- scan conversion
 - turn 2D drawing primitives (lines, polygons etc.) into individual pixels (discretizing/sampling)
 - interpolate color across primitive
 - generate discrete fragments

13


Texture Mapping

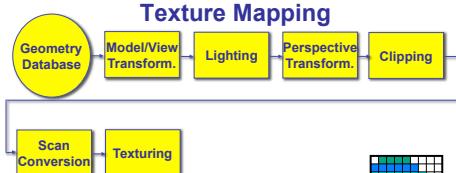

- texture mapping
 - "gluing images onto geometry"
 - color of every fragment is altered by looking up a new color value from an image

14

Depth Test

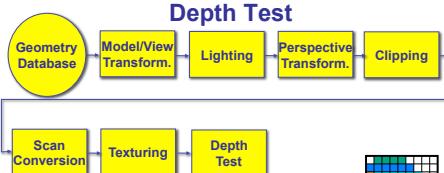


- depth test
 - remove parts of geometry hidden behind other geometric objects
 - perform on every individual fragment
 - other approaches (later)


15

16

Blending

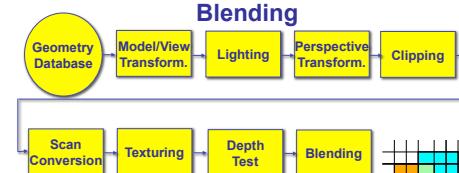

- blending
 - final image: write fragments to pixels
 - draw from farthest to nearest
 - no blending – replace previous color
 - blending: combine new & old values with arithmetic operations

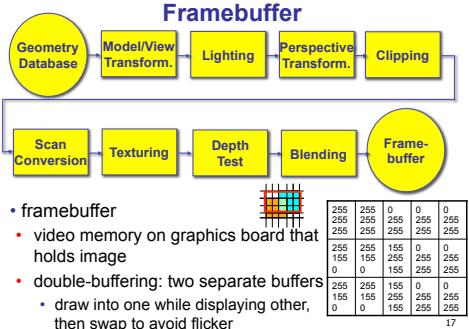

Pipeline Advantages

- modularity: logical separation of different components
- easy to parallelize
- earlier stages can already work on new data while later stages still work with previous data
- similar to pipelining in modern CPUs
- but much more aggressive parallelization possible (special purpose hardware!)
- important for hardware implementations
- only local knowledge of the scene is necessary

18

Pipeline Disadvantages

- limited flexibility
- some algorithms would require different ordering of pipeline stages
 - hard to achieve while still preserving compatibility
- only local knowledge of scene is available
 - shadows, global illumination difficult

19

OpenGL (briefly)

OpenGL

- API to graphics hardware
 - based on IRIS_GL by SGI
- designed to exploit hardware optimized for display and manipulation of 3D graphics
- implemented on many different platforms
- low level, powerful flexible
- pipeline processing
 - set state as needed

Graphics State

- set the state once, remains until overwritten
 - glColor3f(1.0, 1.0, 0.0) → set color to yellow
 - glClearColor(0.0, 0.0, 0.2) → dark blue bg
 - glEnable(GL_LIGHT0) → turn on light
 - glEnable(GL_DEPTH_TEST) → hidden surf.

21


22

Geometry Pipeline

- tell it how to interpret geometry
 - glBegin(<mode of geometric primitives>)
 - mode = GL_TRIANGLES, GL_POLYGON, etc.
- feed it vertices
 - glVertex3f(-1.0, 0.0, -1.0)
 - glVertex3f(1.0, 0.0, -1.0)
 - glVertex3f(0.0, 1.0, -1.0)
- tell it you're done
 - glEnd()

23

Open GL: Geometric Primitives

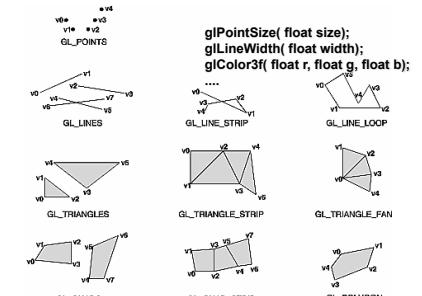

24

Code Sample

```

void display()
{
  glClearColor(0.0, 0.0, 0.0, 0.0);
  glClear(GL_COLOR_BUFFER_BIT);
  glColor3f(0.0, 1.0, 0.0);
  glBegin(GL_POLYGON);
  glVertex3f(0.25, 0.25, -0.5);
  glVertex3f(0.75, 0.25, -0.5);
  glVertex3f(0.75, 0.75, -0.5);
  glVertex3f(0.25, 0.75, -0.5);
  glEnd();
  glFlush();
}
  
```

• more OpenGL as course continues

25

GLUT

GLUT: OpenGL Utility Toolkit

- developed by Mark Kilgard (also from SGI)
- simple, portable window manager
 - opening windows
 - handling graphics contexts
 - handling input with callbacks
 - keyboard, mouse, window reshape events
 - timing
 - idle processing, idle events
- designed for small/medium size applications
- distributed as binaries
- free, but not open source

26

27

Event-Driven Programming

- main loop not under your control
 - vs. batch mode where you control the flow
- control flow through event callbacks
 - redraw the window now
 - key was pressed
 - mouse moved
- callback functions called from main loop when events occur
 - mouse/keyboard state setting vs. redrawing

28

GLUT Callback Functions

```

// you supply these kind of functions
void reshape(int w, int h);
void keyboard(unsigned char key, int x, int y);
void mouse(int button, int state, int x, int y);
void idle();
void display();

// register them with glut
	glutReshapeFunc(reshape);
	glutKeyboardFunc(keyboard);
	glutMouseFunc(mouse);
	glutIdleFunc(idle);
	glutDisplayFunc(display);

void glutDisplayFunc (void (*func)(void));
void glutKeyboardFunc (void (*func)(unsigned char key, int x, int y));
void glutIdleFunc (void (*func)());
void glutReshapeFunc (void (*func)(int width, int height));
  
```

29

GLUT Example 1

```

#include <GLUT/glut.h>
void display()
{
  glClearColor(0,0,0,1);
  int main(argc, argv)
  {
    glClear(GL_COLOR_BUFFER_BIT);
    glutInit(&argc, argv);
    glColor4f(0,1,0,1);
    glutInitDisplayMode(GL_RGB|GLUT_DOUBLE);
    glBegin(GL_POLYGON);
    glVertex3f(0.25, 0.25, -0.5);
    glVertex3f(0.75, 0.25, -0.5);
    glVertex3f(0.75, 0.75, -0.5);
    glVertex3f(0.25, 0.75, -0.5);
    glutMainLoop();
    glEnd();
    glutSwapBuffers();
  }
}
  
```

30

GLUT Example 2

```

#include <GLUT/glut.h>
void display()
{
  glRotatef(0.1, 0,0,1);
  int main(argc, argv)
  {
    glClearColor(0,0,0,1);
    glutInit(&argc, argv);
    glClear(GL_COLOR_BUFFER_BIT);
    glutInitDisplayMode(GL_RGB|GLUT_DOUBLE);
    glColor4f(0,1,0,1);
    glutInitWindowSize(640,480);
    glBegin(GL_POLYGON);
    glVertex3f(0.25, 0.25, -0.5);
    glutCreateWindow("glut1");
    glVertex3f(0.75, 0.25, -0.5);
    glutDisplayFunc(display);
    glVertex3f(0.75, 0.75, -0.5);
    glutMainLoop();
    glEnd();
    glutSwapBuffers();
  }
}
  
```

31

Redrawing Display

- display only redrawn by explicit request
 - glutPostRedisplay() function
 - default window resize callback does this
- idle called from main loop when no user input
 - good place to request redraw
 - will call display next time through event loop
- should return control to main loop quickly
- continues to rotate even when no user action

32

GLUT Example 3

```
#include <GLUT/glut.h>
void display() {
    glutPostRedisplay();
}
glRotatef(0.1, 0,0,1);
    int main(int argc,char**argv)
{
glClearColor(0,0,0,1);
    glClear(GL_COLOR_BUFFER_BIT); glutInit(&argc, argv );
    glColor4f(0,1,0,1); glutInitDisplayMode(
    glBegin(GL_POLYGON);     GLUT_RGB|GLUT_DOUBLE);
    glVertex3f(0.25, 0.25, -0.5); glutCreateWindow("glut1");
    glVertex3f(0.75, 0.25, -0.5); glutDisplayFunc( display );
    glVertex3f(0.75, 0.75, -0.5); glutIdleFunc( idle );
    glVertex3f(0.25, 0.75, -0.5); glutMainLoop();
    glEnd();
    glutSwapBuffers();
    return 0; // never reached
}
```

Keyboard/Mouse Callbacks

- again, do minimal work
- consider keypress that triggers animation
 - do not have loop calling display in callback!
 - what if user hits another key during animation?
 - instead, use shared/global variables to keep track of state
 - yes, OK to use globals for this!
 - then display function just uses current variable value

33

GLUT Example 4

```
#include <GLUT/glut.h>
void doKey(unsigned char key,
           int x, int y) {
bool animToggle = true;
float angle = 0.1;
if ('t' == key) {
    animToggle = !animToggle;
    if (!animToggle)
        glutIdleFunc(NULL);
    else
        glutIdleFunc(idle);
    ...
} else if ('r' == key) {
    angle = -angle;
}
glutPostRedisplay();
}
int main(int argc,char**argv)
{
    ...
    glutKeyboardFunc( doKey );
    ...
}
```

35

Readings for Transform Lectures

- FCG Chap 6 Transformation Matrices
 - *except* 6.1.6, 6.3.1
- FCG Sect 13.3 Scene Graphs
- RB Chap Viewing
 - Viewing and Modeling Transforms *until* Viewing Transformations
 - Examples of Composing Several Transformations *through* Building an Articulated Robot Arm
- RB Appendix Homogeneous Coordinates and Transformation Matrices
 - *until* Perspective Projection
- RB Chap Display Lists

36