

Visualization Analysis & Design

Full-Day Tutorial

Tamara Munzner


Department of Computer Science

University of British Columbia

ACT

August 2016, Iowa City IA

<http://www.cs.ubc.ca/~tmm/talks.html#vad16act>

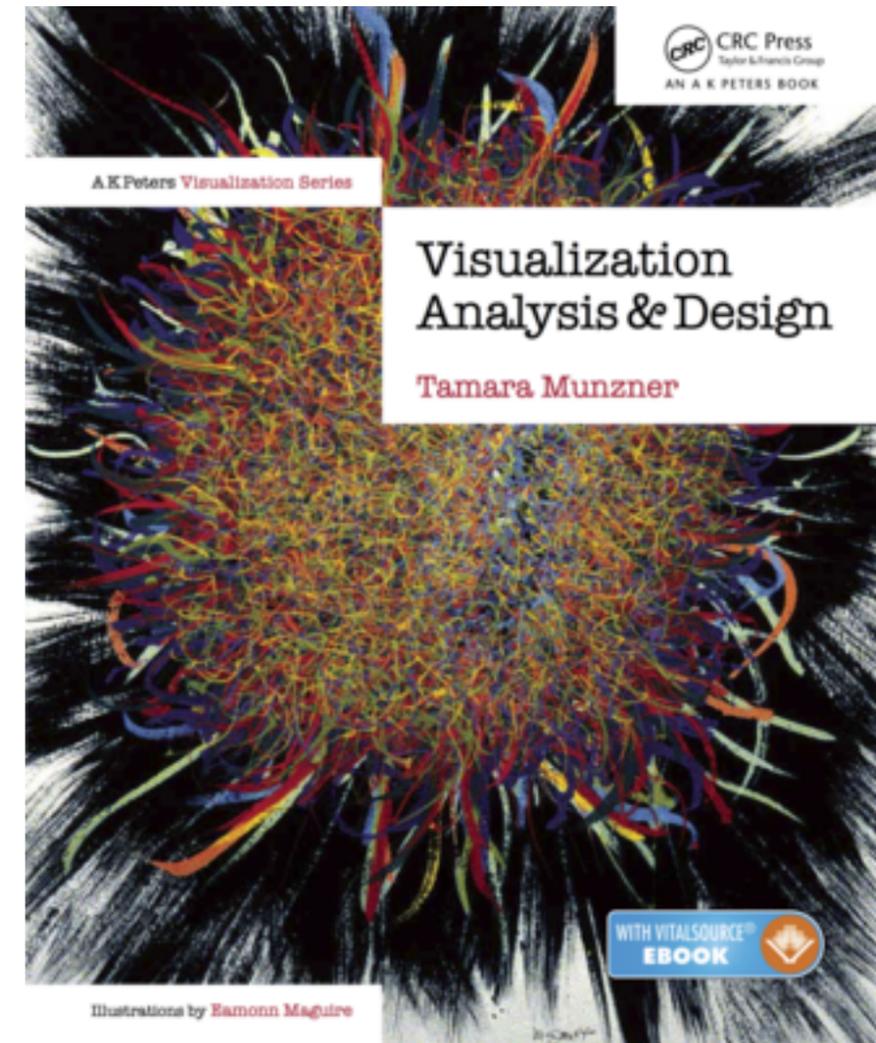

[@tamaramunzner](https://twitter.com/tamaramunzner)

Outline

- **Session 1 8:30-10:00am**
Visualization Analysis Framework
 - Introduction: Definitions
 - Analysis: What, Why, How
 - Marks and Channels
- **Session 2 10:30am-12:00pm**
Spatial Layout
 - Arrange Tables
 - Arrange Spatial Data
 - Arrange Networks and Trees
- **Session 3 1:00-2:30pm**
Color & Interaction
 - Map Color
 - Manipulate: Change, Select, Navigate
 - Facet: Juxtapose, Partition, Superimpose
- **Session 4 3:00-4:30pm**
Guidelines and Examples
 - Reduce: Filter, Aggregate
 - Rules of Thumb
 - Q&A

Defining visualization (vis)

Computer-based visualization systems provide visual representations of datasets designed to help people carry out tasks more effectively.

Why?...

Why have a human in the loop?

Computer-based visualization systems provide visual representations of datasets designed to help people carry out tasks more effectively.


Visualization is suitable when there is a need to augment human capabilities rather than replace people with computational decision-making methods.

- don't need vis when fully automatic solution exists and is trusted
- many analysis problems ill-specified
 - don't know exactly what questions to ask in advance
- possibilities
 - long-term use for end users (e.g. exploratory analysis of scientific data)
 - presentation of known results
 - stepping stone to better understanding of requirements before developing models
 - help developers of automatic solution refine/debug, determine parameters
 - help end users of automatic solutions verify, build trust

Why use an external representation?

Computer-based visualization systems provide **visual representations** of datasets designed to help people carry out tasks more effectively.

- external representation: replace cognition with perception

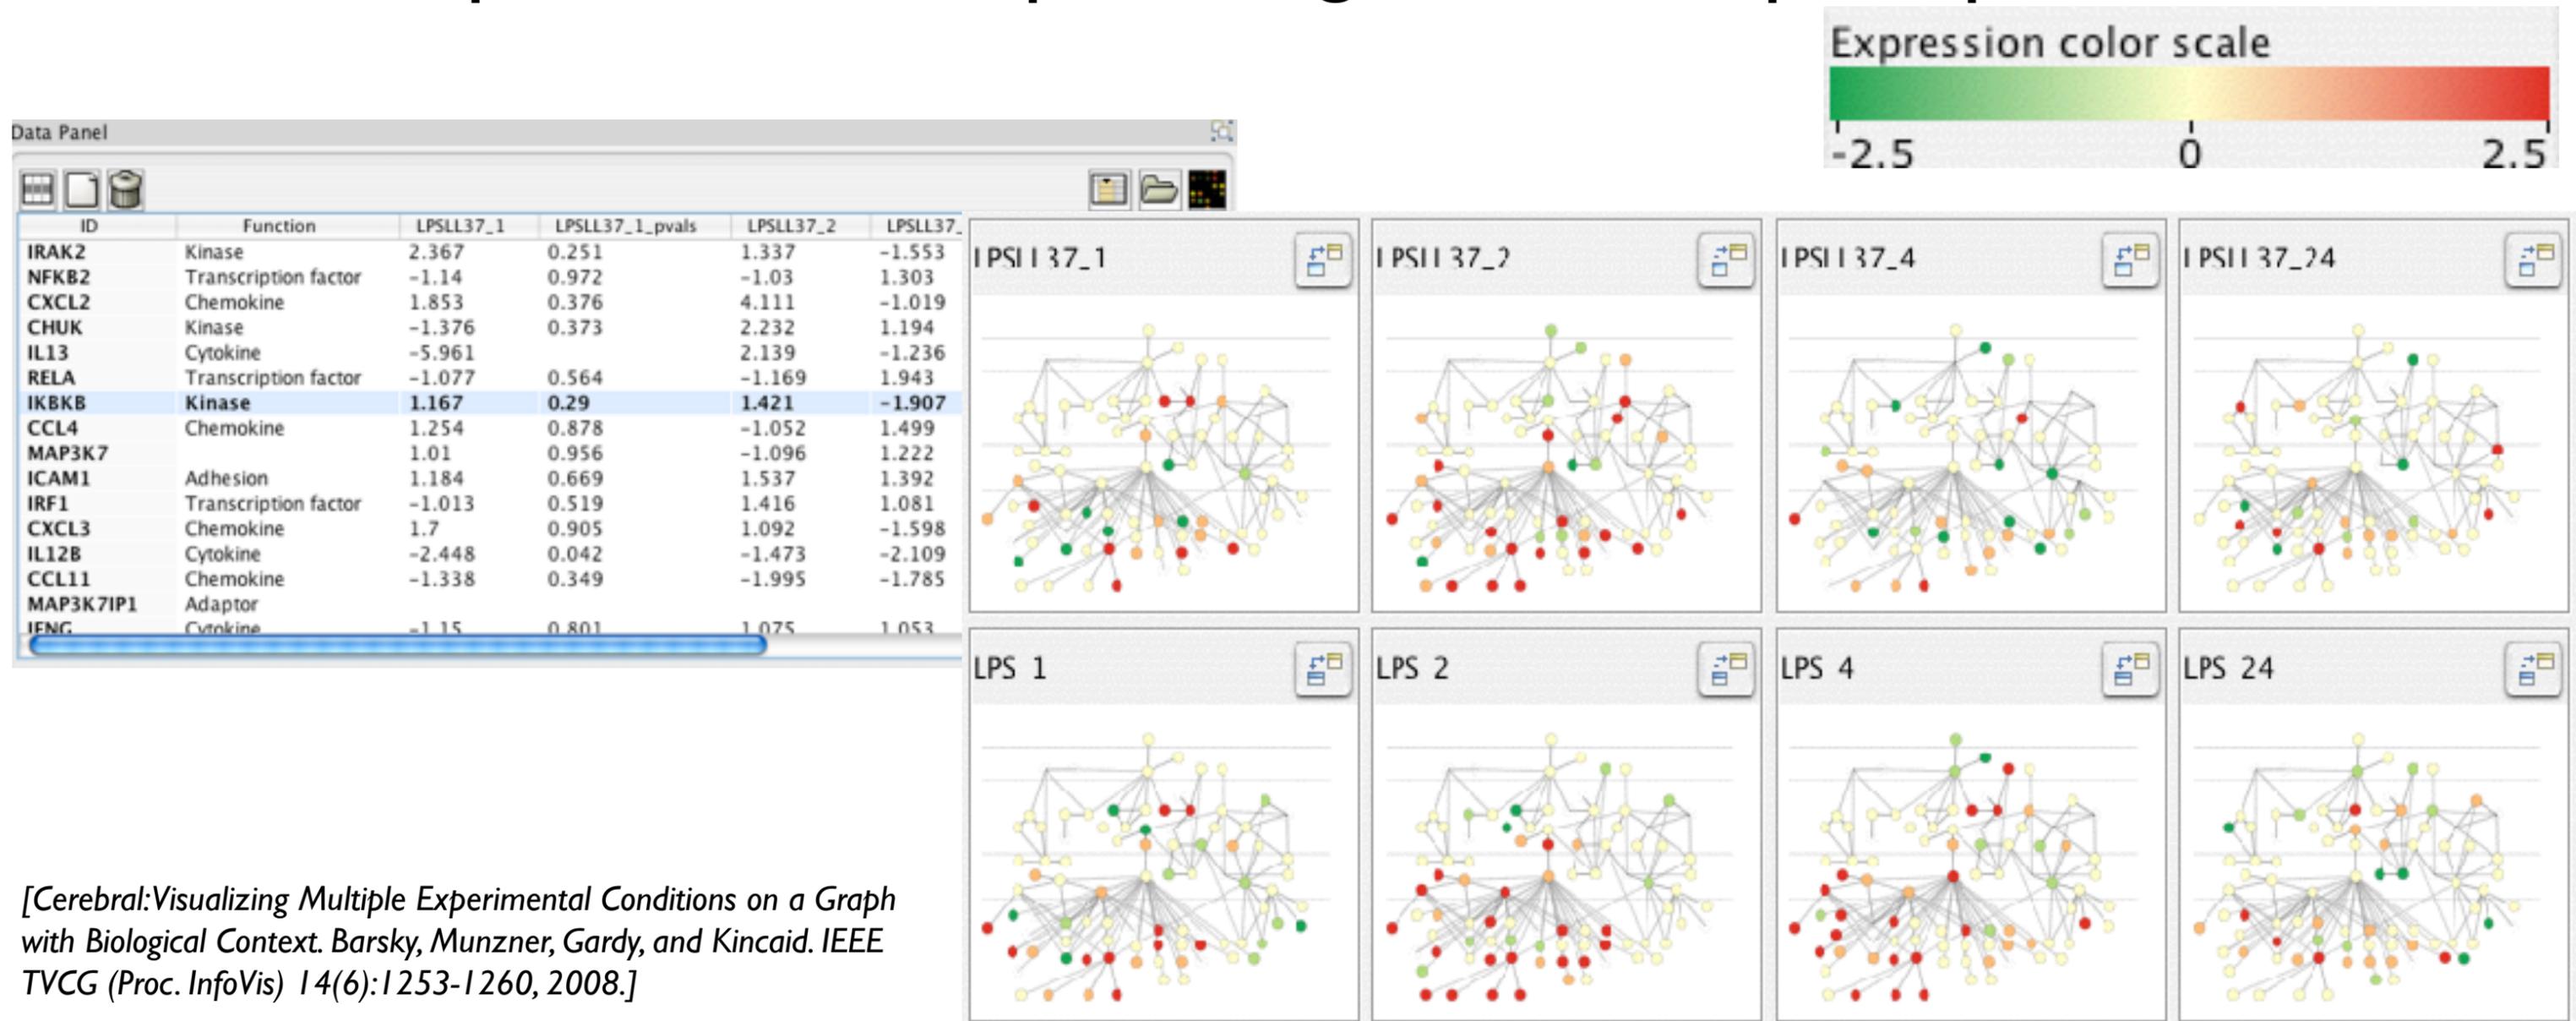

[Cerebral: Visualizing Multiple Experimental Conditions on a Graph with Biological Context. Barsky, Munzner, Gardy, and Kincaid. IEEE TVCG (Proc. InfoVis) 14(6):1253-1260, 2008.]

Why depend on vision?

Computer-based visualization systems provide visual representations of datasets designed to help people carry out tasks more effectively.

- human visual system is high-bandwidth channel to brain
 - overview possible due to background processing
 - subjective experience of seeing everything simultaneously
 - significant processing occurs in parallel and pre-attentively
- sound: lower bandwidth and different semantics
 - overview not supported
 - subjective experience of sequential stream
- touch/haptics: impoverished record/replay capacity
 - only very low-bandwidth communication thus far
- taste, smell: no viable record/replay devices

Why represent all the data?





Computer-based visualization systems provide visual representations of datasets designed to help people carry out tasks more effectively.

- summaries lose information, details matter
 - confirm expected and find unexpected patterns
 - assess validity of statistical model

Anscombe's Quartet

Identical statistics

x mean	9
x variance	10
y mean	7.5
y variance	3.75
x/y correlation	0.816

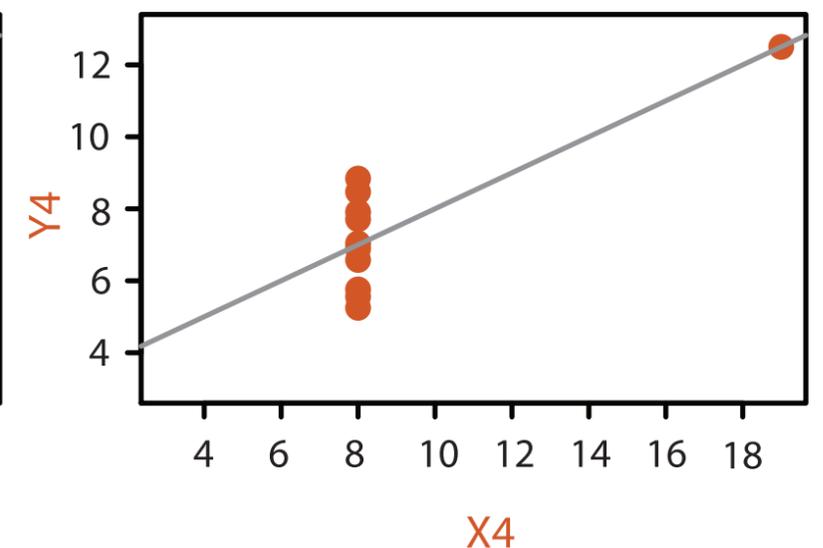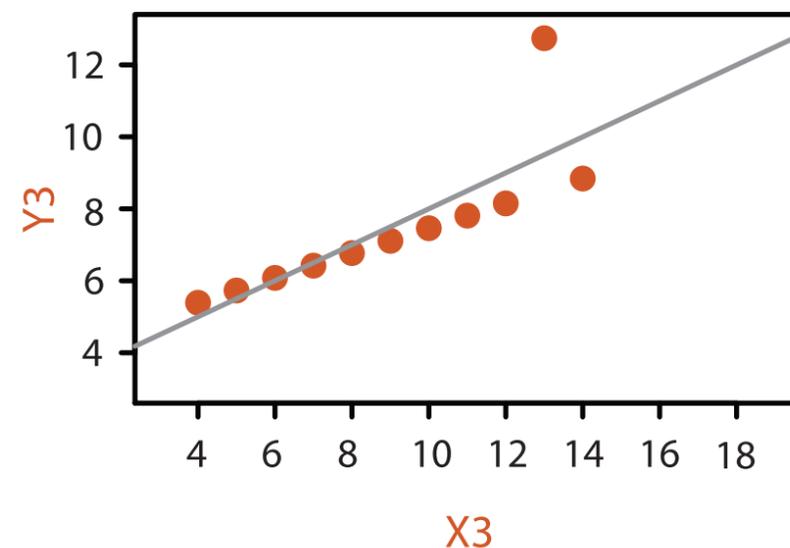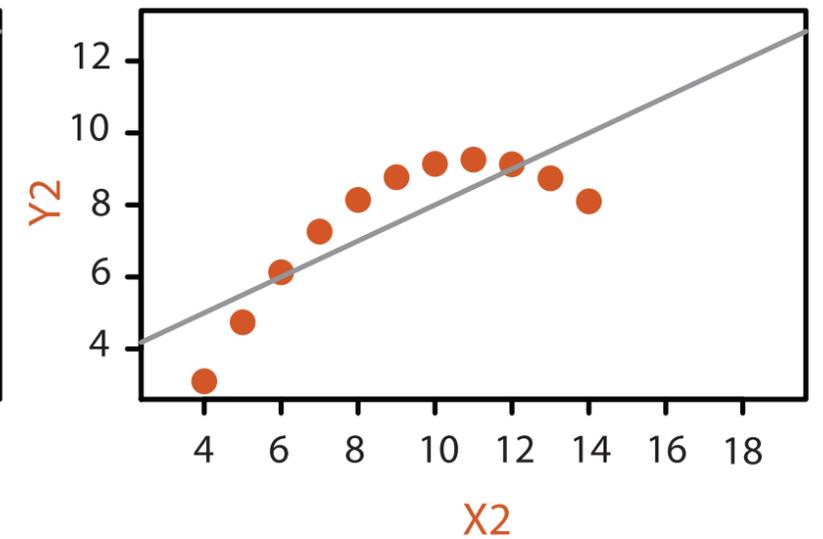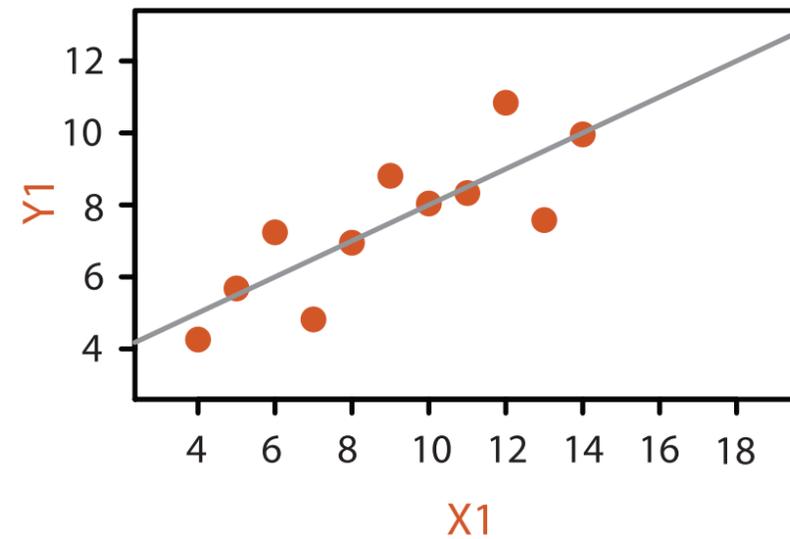

Why focus on tasks and effectiveness?

Computer-based visualization systems provide visual representations of datasets designed to help people carry out tasks more effectively.

- tasks serve as constraint on design (as does data)
 - idioms do not serve all tasks equally!
 - challenge: recast tasks from domain-specific vocabulary to abstract forms
- most possibilities ineffective
 - validation is necessary, but tricky
 - increases chance of finding good solutions if you understand full space of possibilities
- what counts as effective?
 - novel: enable entirely new kinds of analysis
 - faster: speed up existing workflows

What resource limitations are we faced with?

Vis designers must take into account three very different kinds of resource limitations: those of computers, of humans, and of displays.

- computational limits
 - processing time
 - system memory
- human limits
 - human attention and memory
- display limits
 - pixels are precious resource, the most constrained resource
 - **information density**: ratio of space used to encode info vs unused whitespace
 - tradeoff between clutter and wasting space, find sweet spot between dense and sparse

Why analyze?


- imposes structure on huge design space
 - scaffold to help you think systematically about choices
 - analyzing existing as stepping stone to designing new
 - most possibilities ineffective for particular task/data combination

SpaceTree



[SpaceTree: Supporting Exploration in Large Node Link Tree, Design Evolution and Empirical Evaluation. Grosjean, Plaisant, and Bederson. Proc. InfoVis 2002, p 57–64.]

TreeJuxtaposer

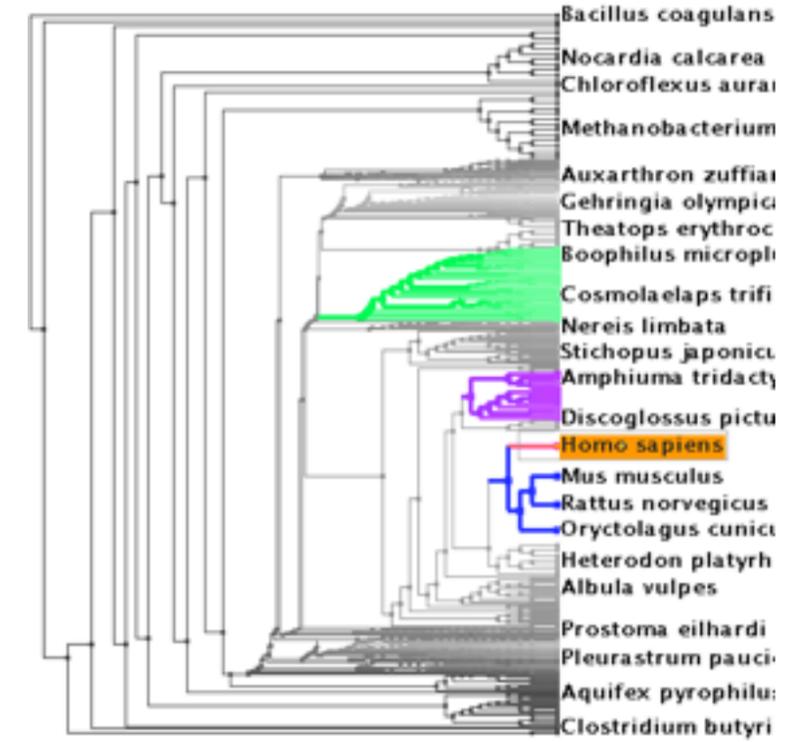


[TreeJuxtaposer: Scalable Tree Comparison Using Focus +Context With Guaranteed Visibility. ACM Trans. on Graphics (Proc. SIGGRAPH) 22:453– 462, 2003.]

What?

Why?

How?

→ Tree



→ Actions

→ Present → Locate → Identify




→ Targets

→ Path between two nodes



→ SpaceTree

→ Encode → Navigate → Select → Filter → Aggregate



→ TreeJuxtaposer

→ Encode → Navigate → Select → Arrange



What?

Why?

How?

Further reading


- Visualization Analysis and Design. Munzner. AK Peters Visualization Series, CRC Press, 2014.
 - *Chap 1: What's Vis, and Why Do It?*

Outline


- **Session 1 8:30-10:00am**
Visualization Analysis Framework
 - Introduction: Definitions
 - **Analysis: What, Why, How**
 - Marks and Channels
- **Session 2 10:30am-12:00pm**
Spatial Layout
 - Arrange Tables
 - Arrange Spatial Data
 - Arrange Networks and Trees
- **Session 3 1:00-2:30pm**
Color & Interaction
 - Map Color
 - Manipulate: Change, Select, Navigate
 - Facet: Juxtapose, Partition, Superimpose
- **Session 4 3:00-4:30pm**
Guidelines and Examples
 - Reduce: Filter, Aggregate
 - Rules of Thumb
 - Q&A

Analysis framework: Four levels, three questions

- *domain* situation
 - who are the target users?
- *abstraction*
 - translate from specifics of domain to vocabulary of vis
- **what** is shown? **data abstraction**
 - often don't just draw what you're given: transform to new form
- **why** is the user looking at it? **task abstraction**
- *idiom*
- **how** is it shown?
 - visual encoding idiom: how to draw
 - interaction idiom: how to manipulate
- *algorithm*
 - efficient computation

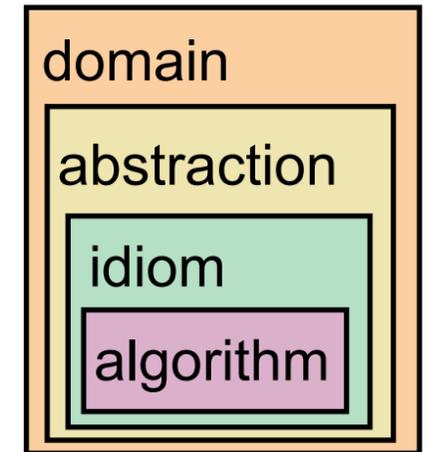

[A Nested Model of Visualization Design and Validation.
Munzner. *IEEE TVCG* 15(6):921-928, 2009 (Proc. InfoVis 2009).]

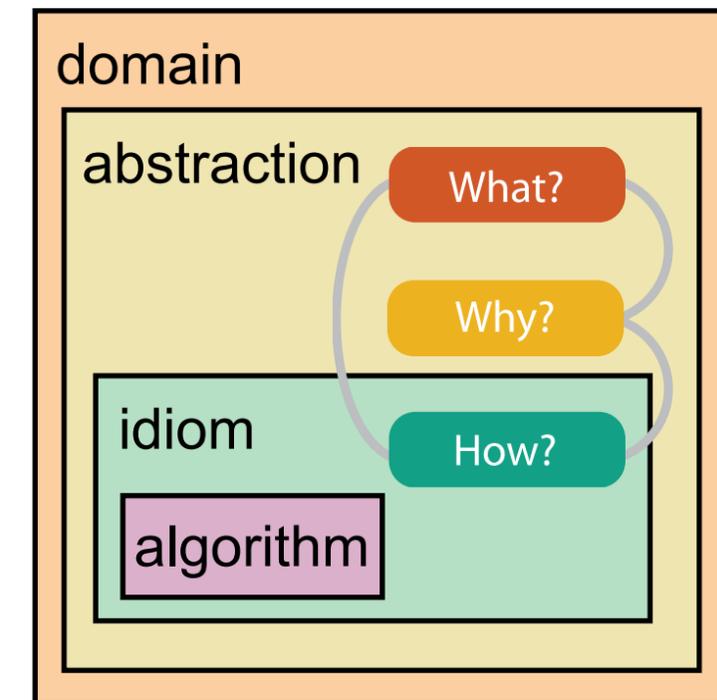

[A Multi-Level Typology of Abstract Visualization Tasks
Brehmer and Munzner. *IEEE TVCG* 19(12):2376-2385, 2013 (Proc. InfoVis 2013).]

Why is validation difficult?

- different ways to get it wrong at each level



Domain situation

You misunderstood their needs



Data/task abstraction

You're showing them the wrong thing



Visual encoding/interaction idiom

The way you show it doesn't work





Algorithm

Your code is too slow

Why is validation difficult?

- solution: use methods from different fields at each level

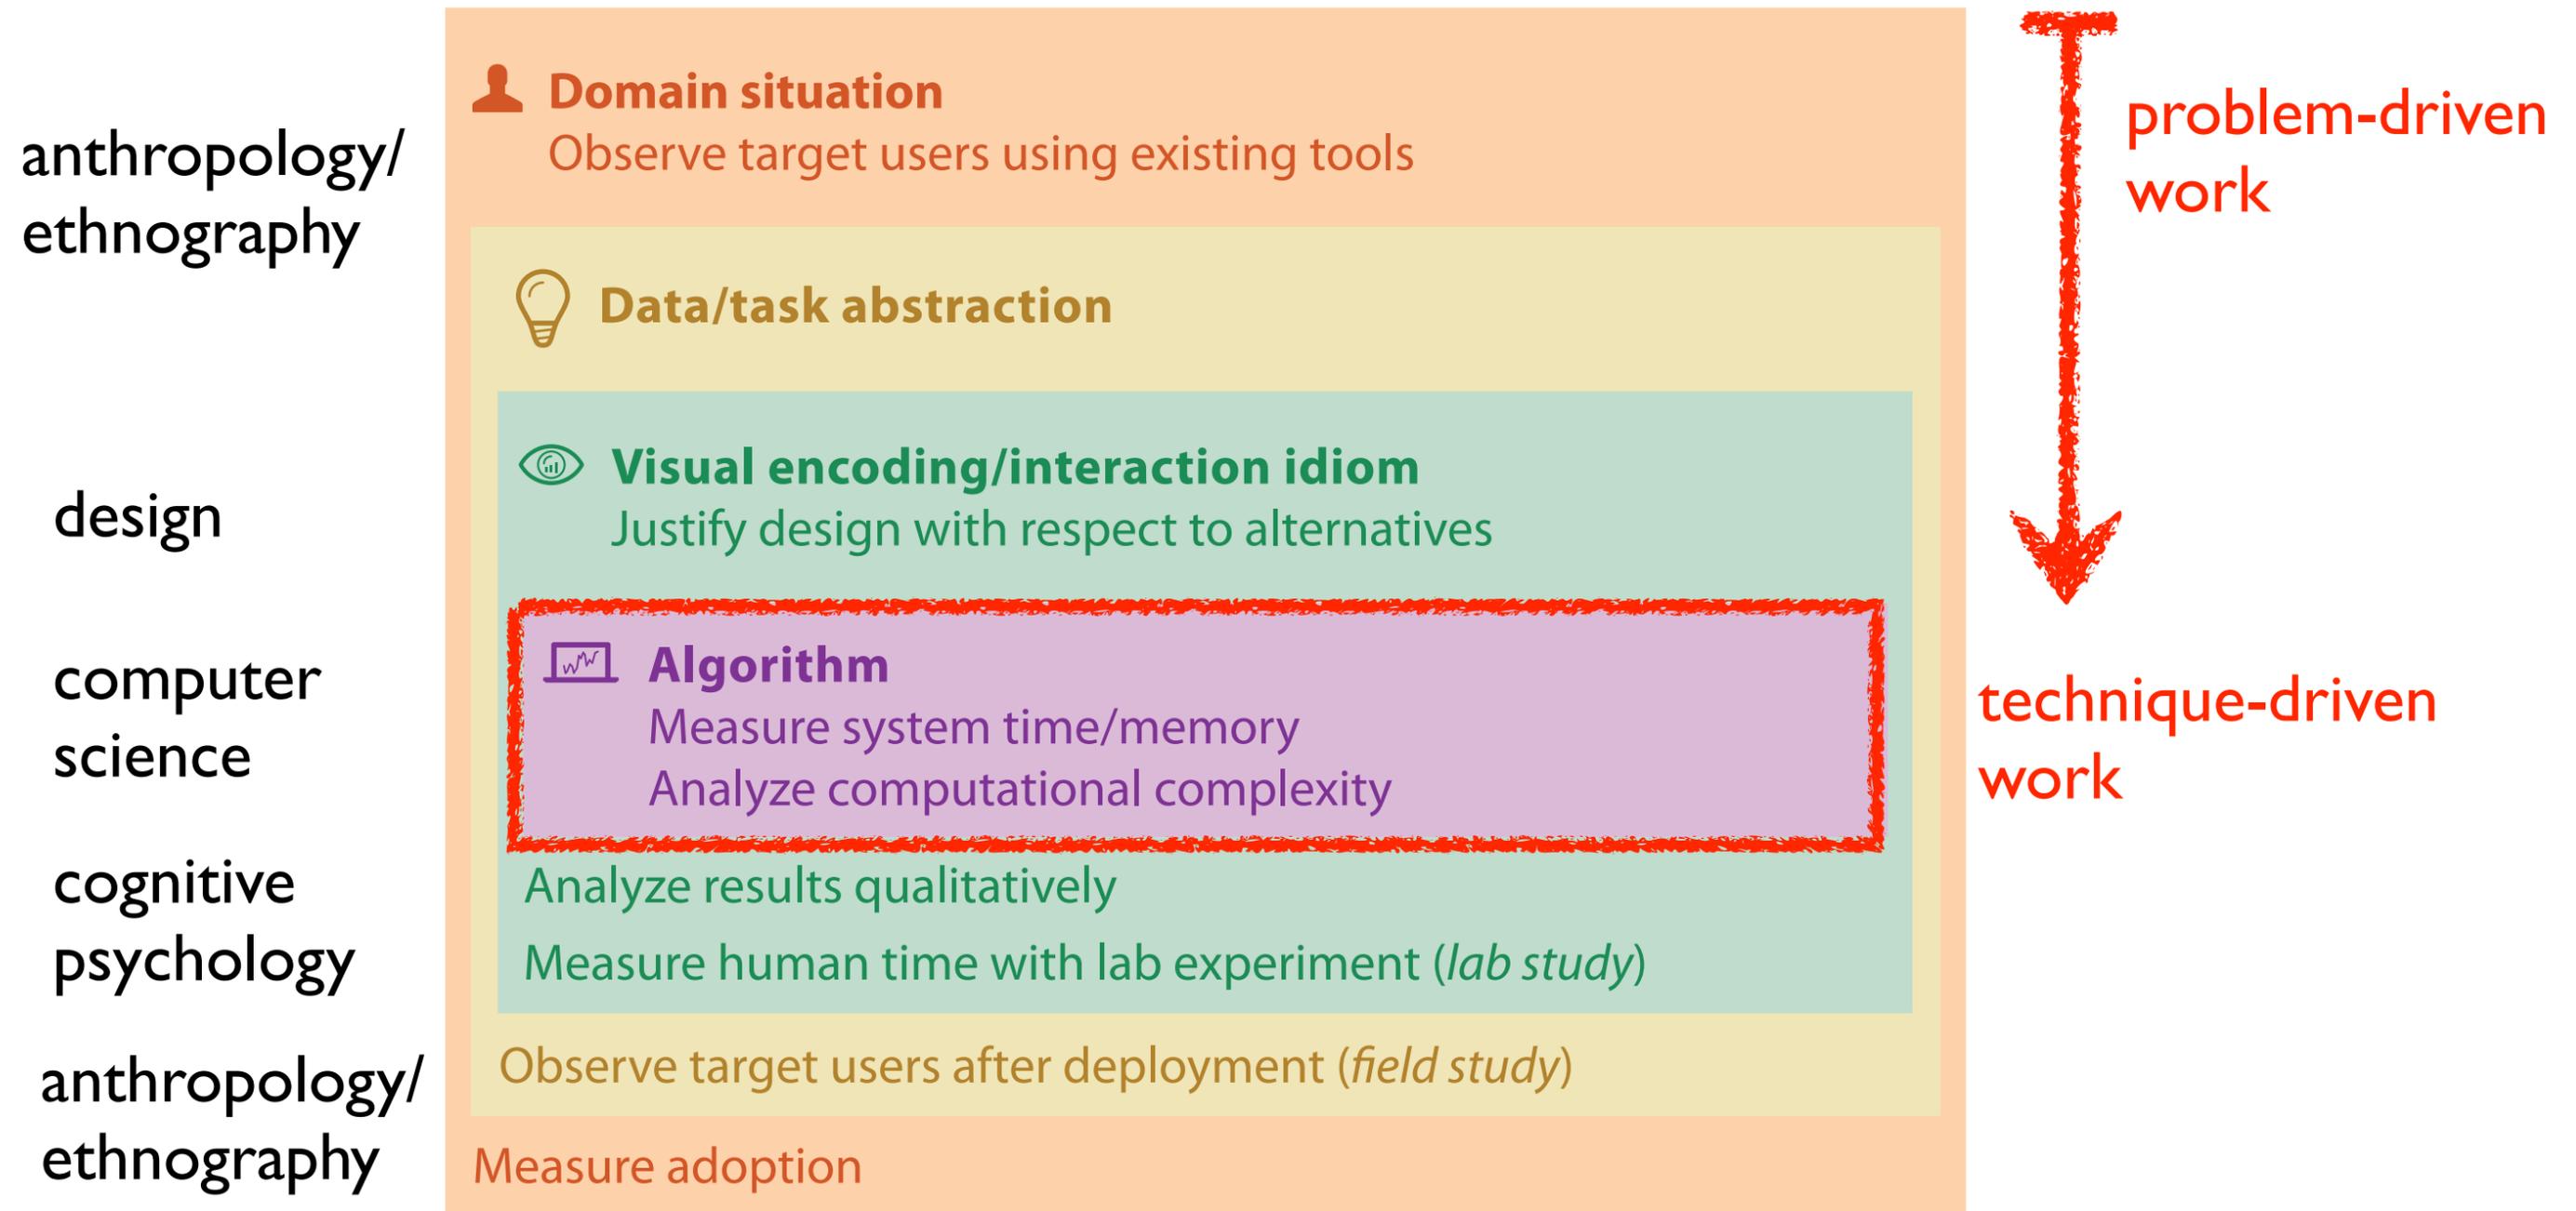

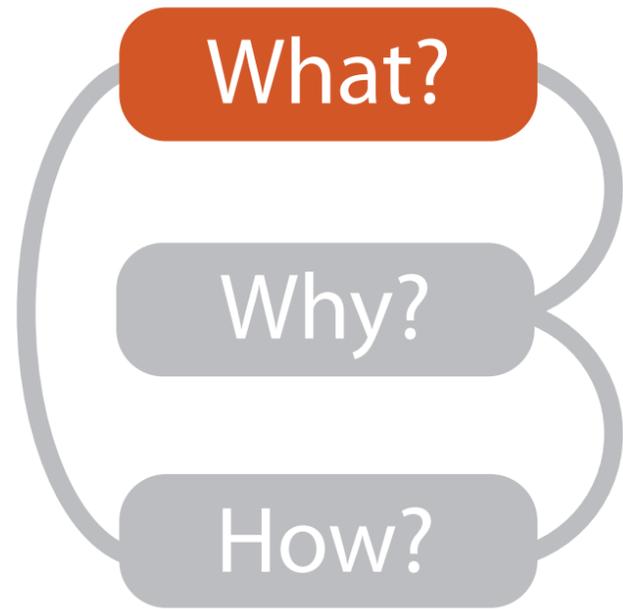



What?

Datasets

Attributes

- Data Types
 - Items
 - Attributes
 - Links
 - Positions
 - Grids

- Attribute Types
 - Categorical
 - + ● ■ ▲
 - Ordered
 - Ordinal
 - 👕 👕 👕
 - Quantitative
 - ┆ ┆ ┆

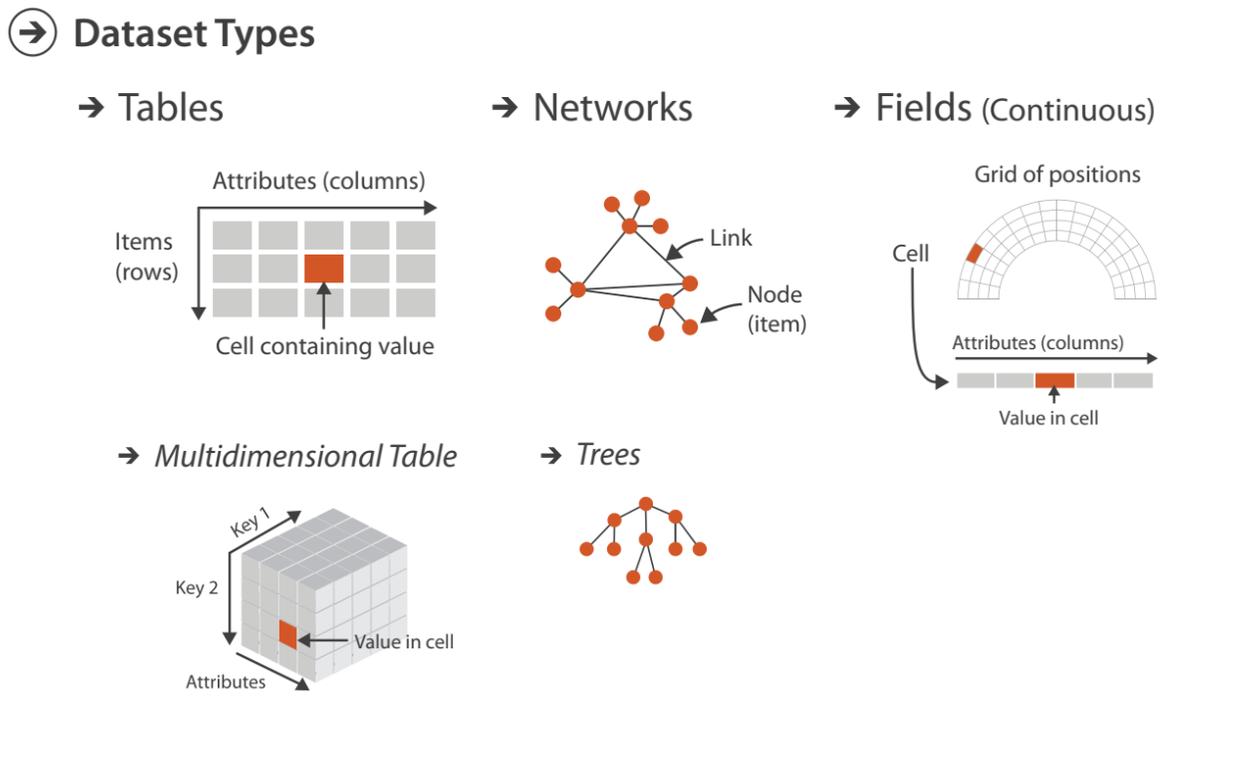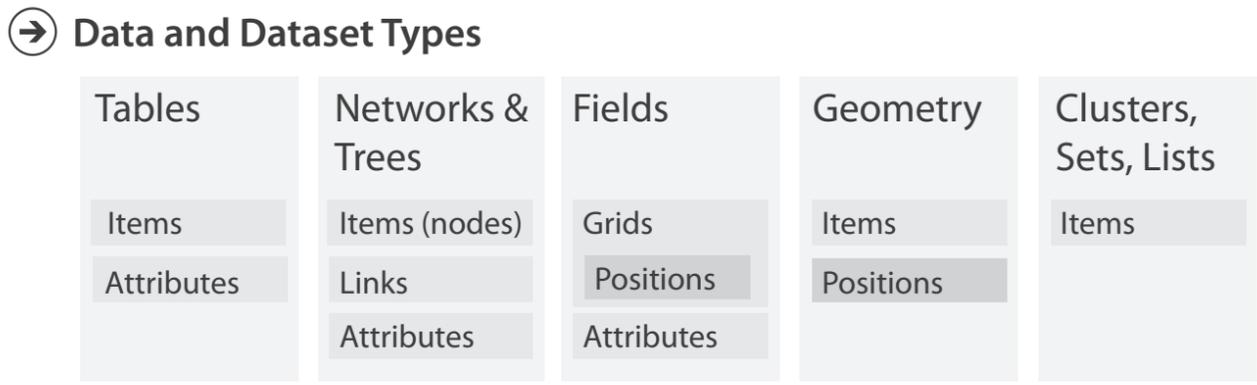


- Ordering Direction
 - Sequential
 -
 - Diverging
 - ←→
 - Cyclic
 - ↻




Three major datatypes

→ Dataset Types


→ Tables

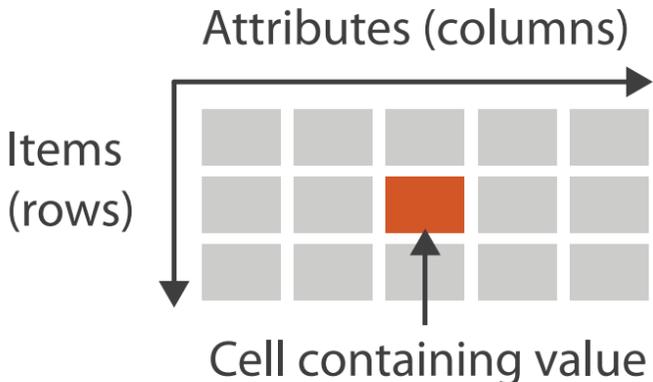


→ Multidimensional Table

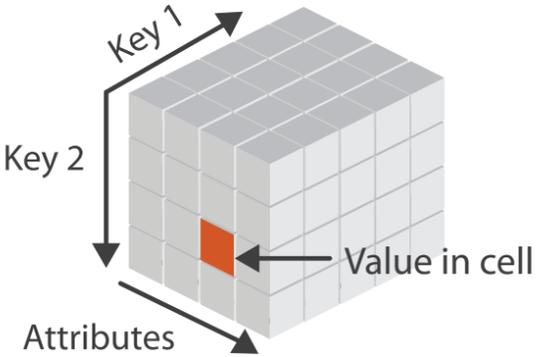

→ Networks

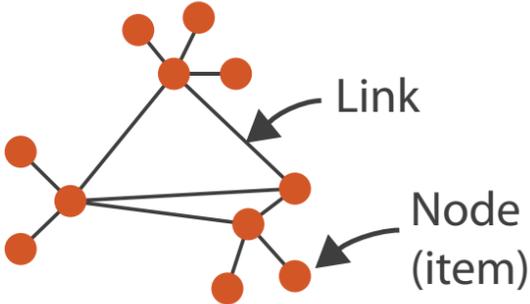


→ Trees

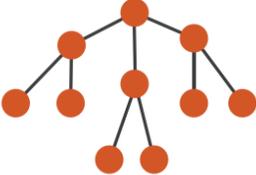

→ Spatial

→ Fields (Continuous)

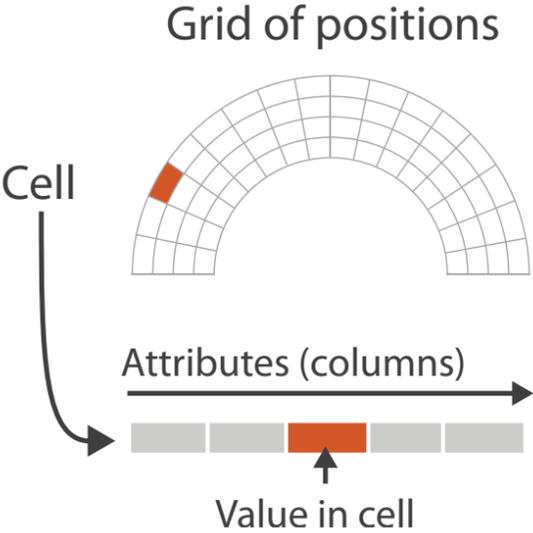


→ Geometry (Spatial)



- visualization vs computer graphics
 - geometry is design decision

Dataset and data types

→ Data and Dataset Types

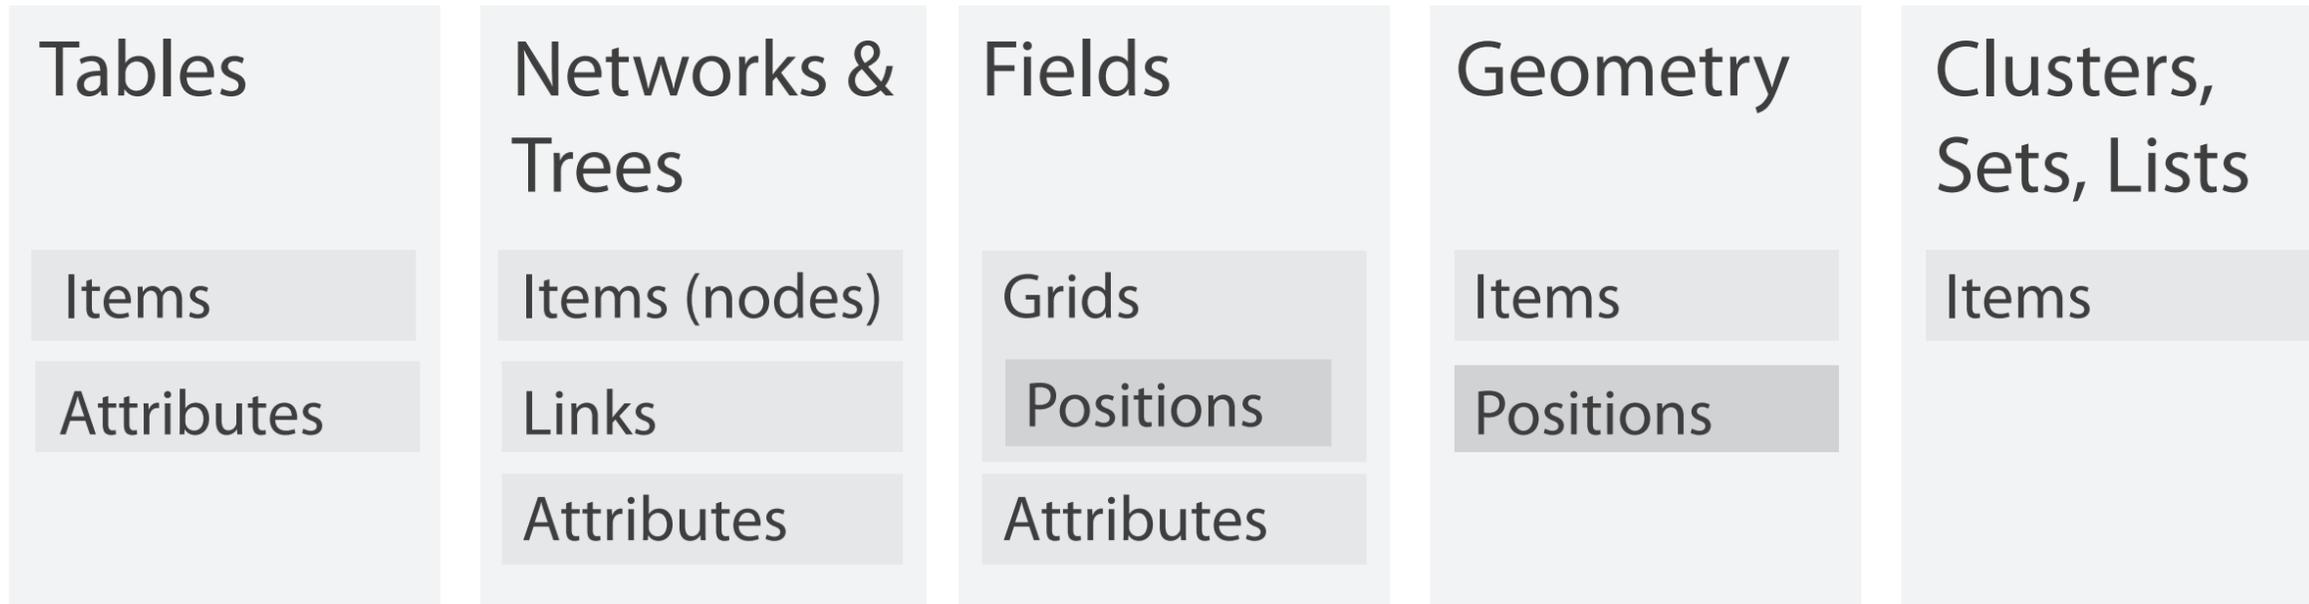

→ Data Types

→ Items → Attributes → Links → Positions → Grids

→ Dataset Availability

→ Static



→ Dynamic



Attribute types


➔ Attribute Types

➔ Categorical




➔ Ordered

➔ *Ordinal*

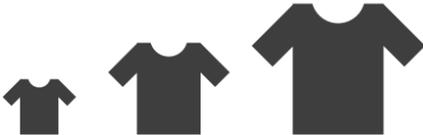

➔ *Quantitative*

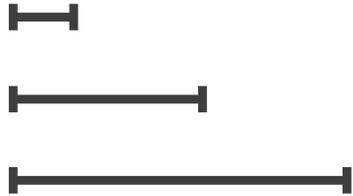

➔ Ordering Direction

➔ Sequential




➔ Diverging



➔ Cyclic



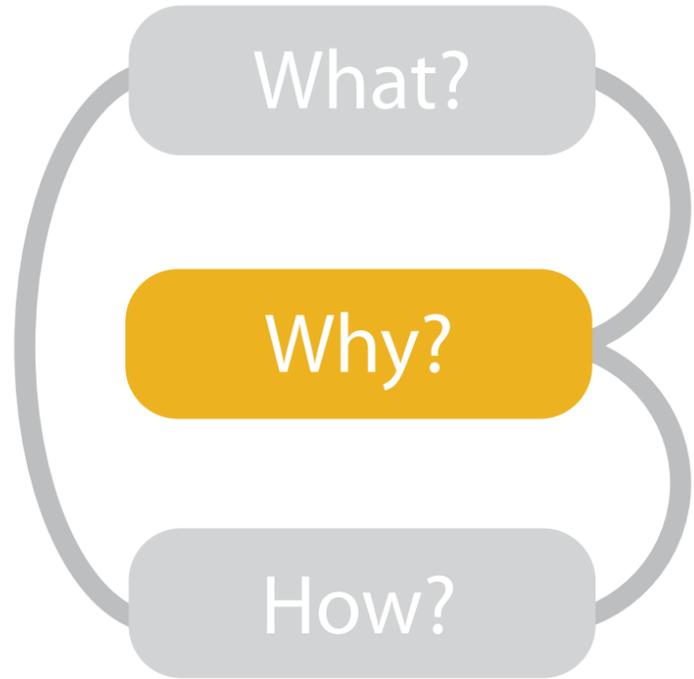

Actions

Targets

→ Analyze

→ Consume

→ Discover



→ Present



→ Enjoy



→ Produce

→ Annotate



→ Record



→ Derive



→ Search

	Target known	Target unknown
Location known	Lookup	Browse
Location unknown	Locate	Explore

→ Query

→ Identify



→ Compare




→ Summarize




→ All Data

→ Trends



→ Outliers



→ Features



→ Attributes

→ One

→ Distribution



→ Extremes




→ Many

→ Dependency



→ Correlation



→ Similarity



→ Network Data

→ Topology



→ Paths




→ Spatial Data

→ Shape



- {action, target} pairs
 - discover distribution
 - compare trends
 - locate outliers
 - browse topology

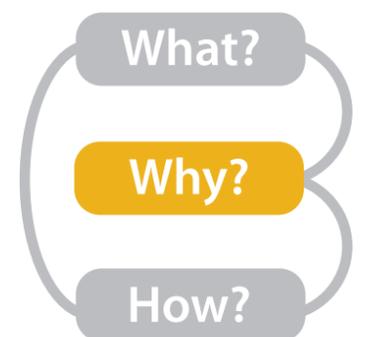

Actions: Analyze

- consume
 - discover vs present
 - classic split
 - aka explore vs explain
 - enjoy
- produce
 - newcomer
 - aka casual, social
- produce
 - annotate, record
 - derive
 - crucial design choice

→ Analyze

→ Consume

→ Discover



→ Present




→ Enjoy



→ Produce

→ Annotate

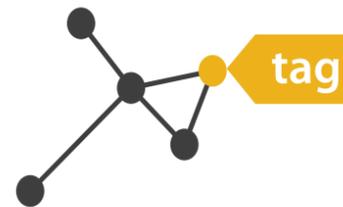

→ Record




→ Derive




Derive

- don't just draw what you're given!
 - decide what the right thing to show is
 - create it with a series of transformations from the original dataset
 - draw that
- one of the four major strategies for handling complexity

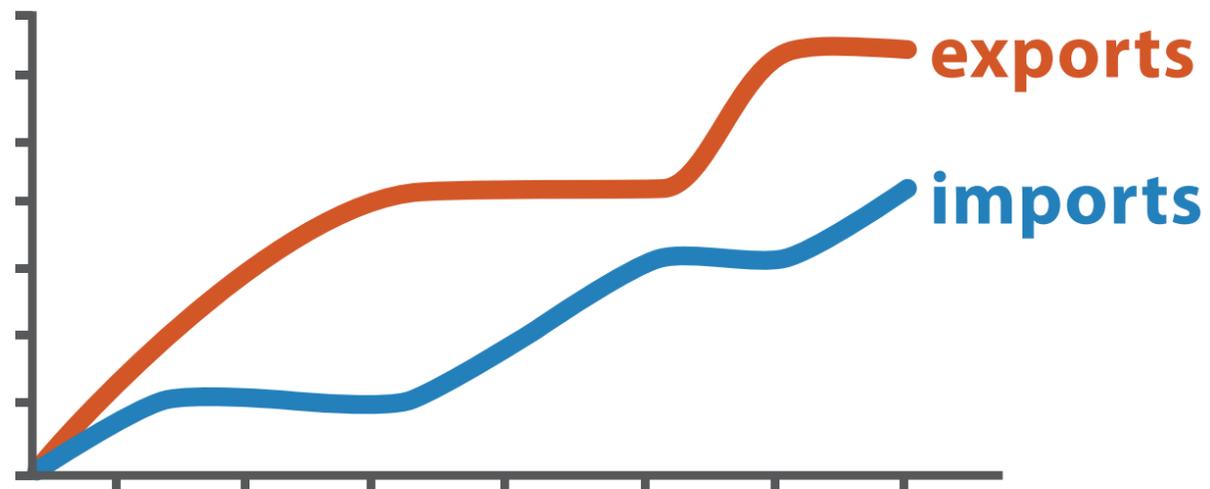

Original Data

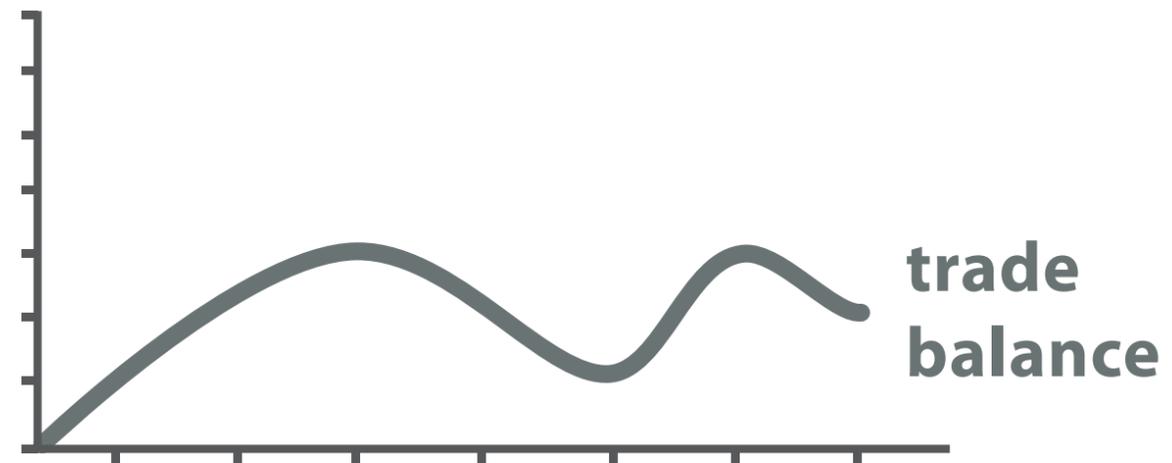

$$\text{trade balance} = \text{exports} - \text{imports}$$

Derived Data

Actions: Search, query

- what does user know? → Search

- target, location

- how much of the data matters?

- one, some, all

	Target known	Target unknown
Location known	 <i>Lookup</i>	 <i>Browse</i>
Location unknown	 <i>Locate</i>	 <i>Explore</i>

- independent choices for each of these three levels

- analyze, search, query

- mix and match

→ Query

→ Identify



→ Compare




→ Summarize




Analysis example: Derive one attribute

- Strahler number
 - centrality metric for trees/networks
 - derived quantitative attribute
 - draw top 5K of 500K for good skeleton

[Using Strahler numbers for real time visual exploration of huge graphs. Auber. Proc. Intl. Conf. Computer Vision and Graphics, pp. 56–69, 2002.]

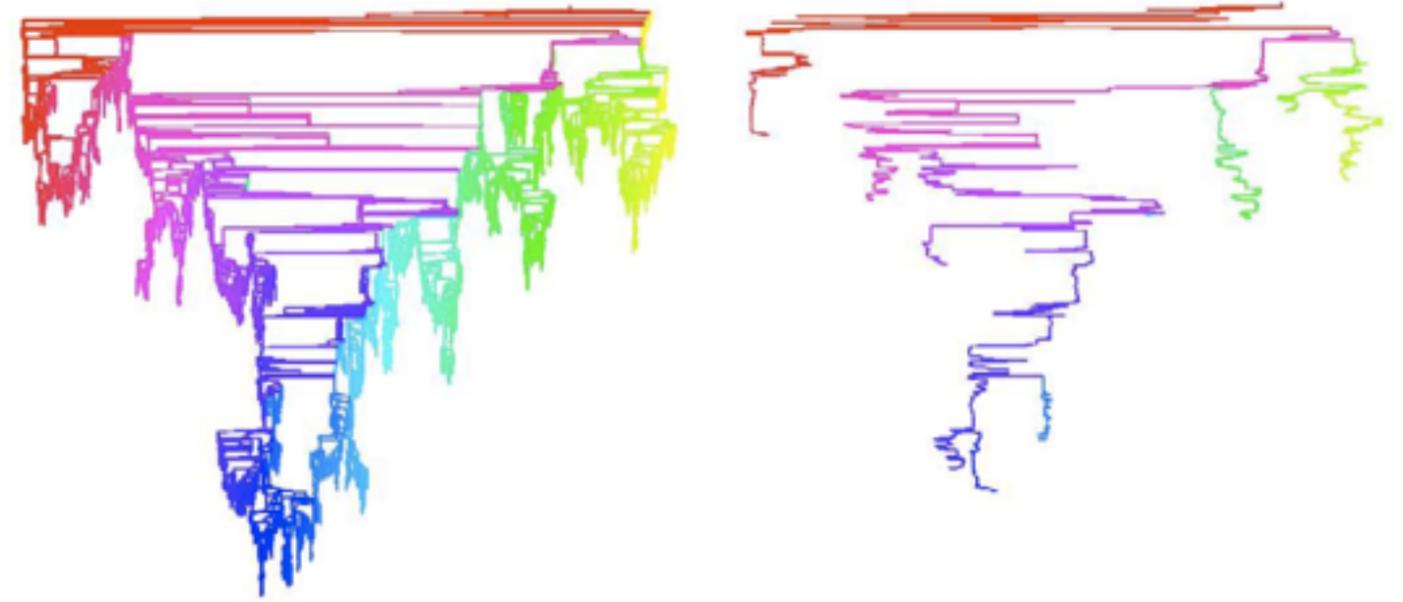

Task 1

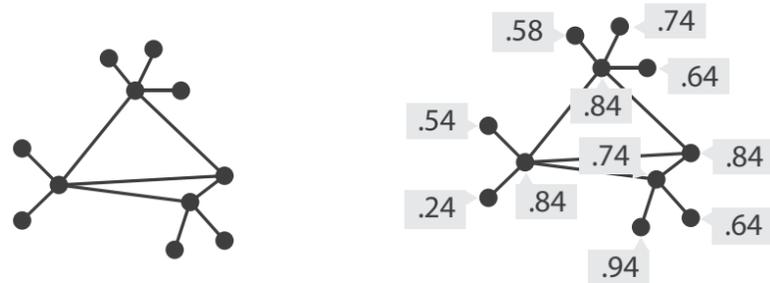

In
Tree

➔

Out
Quantitative
attribute on nodes


What?

- ➔ In Tree
- ➔ Out Quantitative attribute on nodes

Why?

- ➔ Derive

Task 2

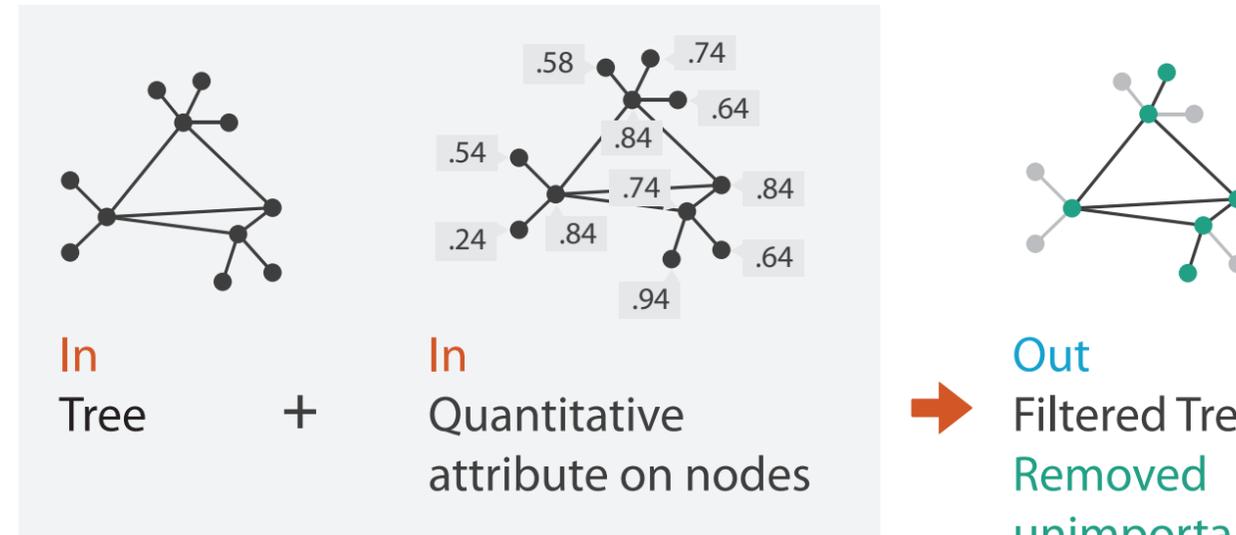

In
Tree

+

In
Quantitative
attribute on nodes

➔

Out
Filtered Tree
Removed
unimportant parts

What?

- ➔ In Tree
- ➔ In Quantitative attribute on nodes
- ➔ Out Filtered Tree

Why?

- ➔ Summarize
- ➔ Topology

How?

- ➔ Reduce
- ➔ Filter

Why: Targets

→ All Data

→ Trends



→ Outliers




→ Features




→ Attributes

→ One

→ *Distribution*

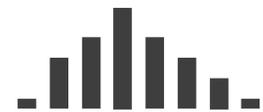

→ *Extremes*

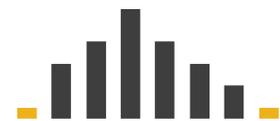


→ Many


→ *Dependency*



→ *Correlation*




→ *Similarity*



→ Network Data

→ Topology

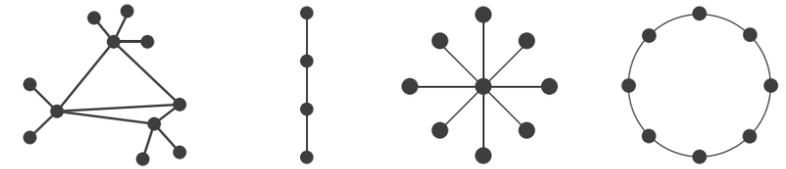


→ *Paths*



→ Spatial Data

→ Shape

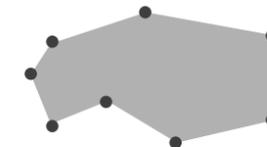

How?

Encode

→ Arrange

→ Express



→ Separate



→ Order



→ Align



→ Use



→ Map

from **categorical** and **ordered** attributes

→ Color

→ Hue



→ Saturation



→ Luminance



→ Size, Angle, Curvature, ...



→ Shape




→ Motion

Direction, Rate, Frequency, ...



Manipulate

→ Change

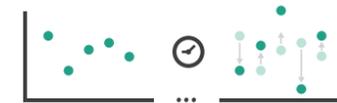

→ Select



→ Navigate



Facet


→ Juxtapose



→ Partition




→ Superimpose

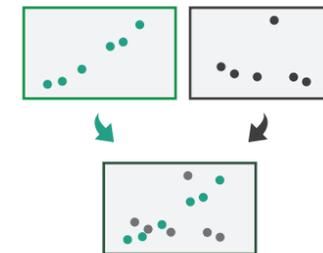

Reduce

→ Filter



→ Aggregate



→ Embed



What?

Why?

How?

Further reading





- Visualization Analysis and Design. Munzner. AK Peters Visualization Series, CRC Press, 2014.
 - *Chap 2:What: Data Abstraction*
 - *Chap 3:Why:Task Abstraction*
- *A Multi-Level Typology of Abstract Visualization Tasks*. Brehmer and Munzner. IEEE Trans. Visualization and Computer Graphics (Proc. InfoVis) 19:12 (2013), 2376–2385.
- *Low-Level Components of Analytic Activity in Information Visualization*. Amar, Eagan, and Stasko. Proc. IEEE InfoVis 2005, p 111–117.
- *A taxonomy of tools that support the fluent and flexible use of visualizations*. Heer and Shneiderman. Communications of the ACM 55:4 (2012), 45–54.
- *Rethinking Visualization:A High-Level Taxonomy*. Tory and Möller. Proc. IEEE InfoVis 2004, p 151–158.
- Visualization of Time-Oriented Data. Aigner, Miksch, Schumann, and Tominski. Springer, 2011.

Outline

- **Session 1 8:30-10:00am**
Visualization Analysis Framework
 - Introduction: Definitions
 - Analysis: What, Why, How
 - **Marks and Channels**
- **Session 2 10:30am-12:00pm**
Spatial Layout
 - Arrange Tables
 - Arrange Spatial Data
 - Arrange Networks and Trees
- **Session 3 1:00-2:30pm**
Color & Interaction
 - Map Color
 - Manipulate: Change, Select, Navigate
 - Facet: Juxtapose, Partition, Superimpose
- **Session 4 3:00-4:30pm**
Guidelines and Examples
 - Reduce: Filter, Aggregate
 - Rules of Thumb
 - Q&A

Visual encoding

- analyze idiom structure

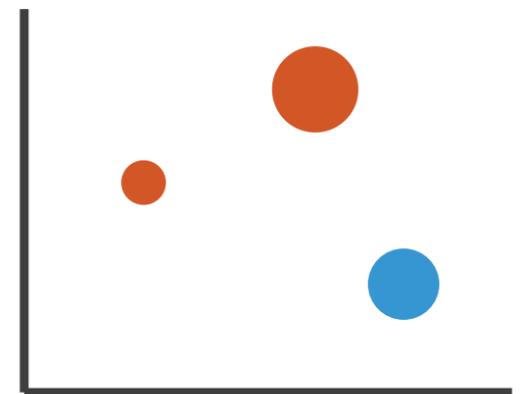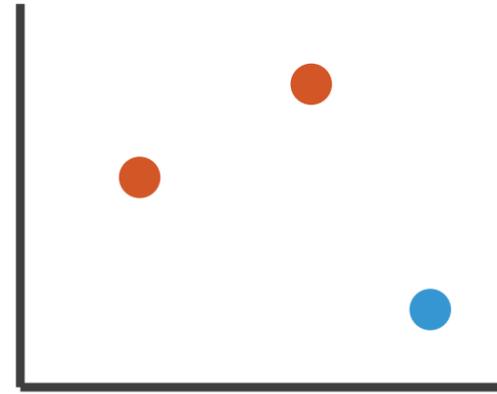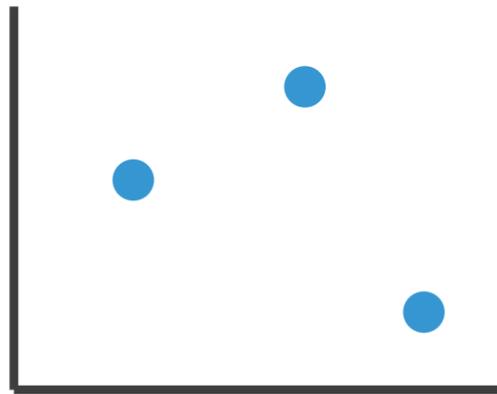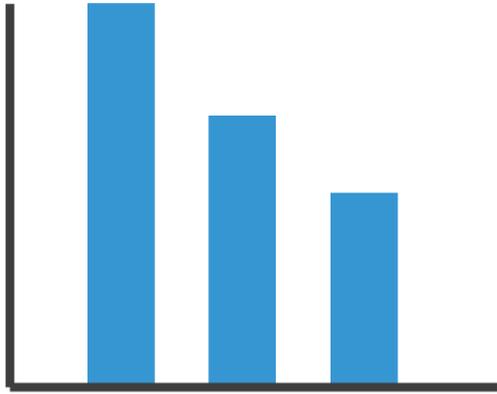


Definitions: Marks and channels

- marks

- geometric primitives

→ Points



→ Lines



→ Areas



- channels

- control appearance of marks

- can redundantly code with multiple channels

→ Position


→ Horizontal



→ Vertical



→ Both



→ Color



→ Shape



→ Tilt



→ Size

→ Length



→ Area




→ Volume




Visual encoding

- analyze idiom structure
 - as combination of marks and channels

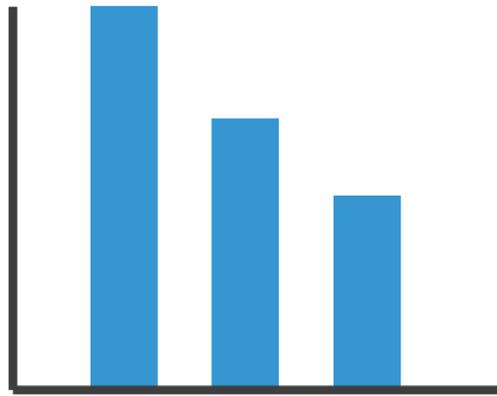


1:
vertical position

mark: line

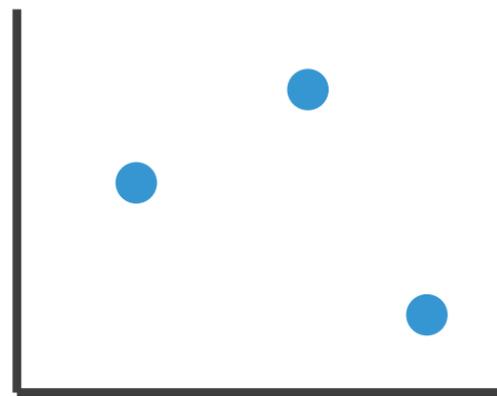


2:
vertical position
horizontal position

mark: point

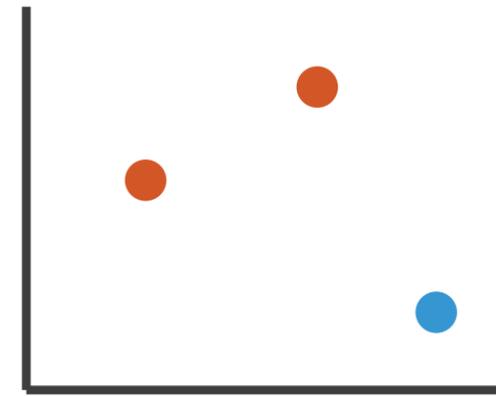

3:
vertical position
horizontal position
color hue

mark: point

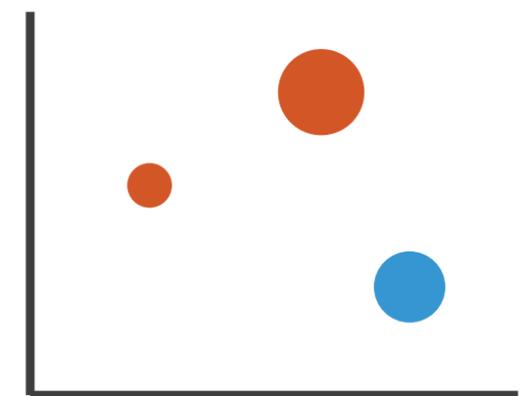

4:
vertical position
horizontal position
color hue
size (area)

mark: point

Channels

Position on common scale



Position on unaligned scale



Length (1D size)



Tilt/angle



Area (2D size)




Depth (3D position)



Color luminance



Color saturation



Curvature



Volume (3D size)



Same

Spatial region



Color hue



Motion



Shape



Channels: Matching Types

➔ Magnitude Channels: Ordered Attributes

Position on common scale 

Position on unaligned scale 

Length (1D size) 

Tilt/angle 

Area (2D size) 

Depth (3D position) 

Color luminance 

Color saturation 

Curvature 

Volume (3D size) 

Same
Same

➔ Identity Channels: Categorical Attributes

Spatial region 

Color hue 


Motion 

Shape 

- **expressiveness principle**
 - match channel and data characteristics

Channels: Rankings

➔ Magnitude Channels: Ordered Attributes

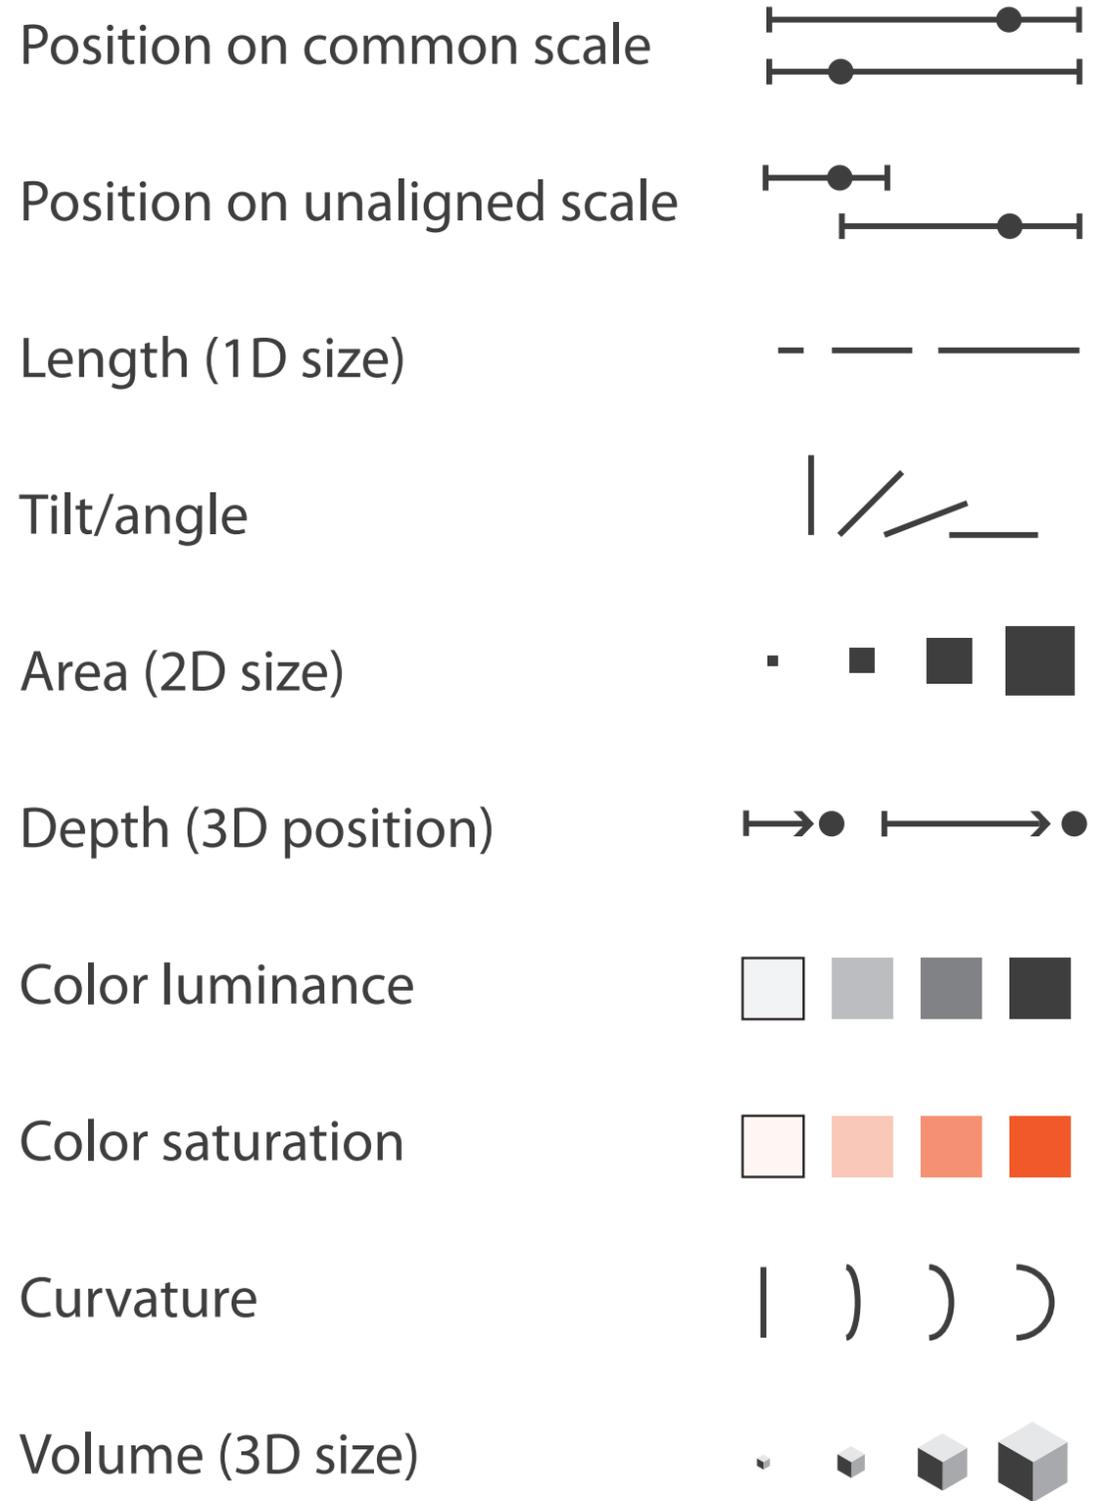

➔ Identity Channels: Categorical Attributes



Best

Effectiveness

Least

Same

Same

- **expressiveness principle**
 - match channel and data characteristics
- **effectiveness principle**
 - encode most important attributes with highest ranked channels

Channels: Expressiveness types and effectiveness rankings

➔ Magnitude Channels: Ordered Attributes

Position on common scale



Position on unaligned scale



Length (1D size)



Tilt/angle



Area (2D size)



Depth (3D position)



Color luminance



Color saturation



Curvature



Volume (3D size)



Same

➔ Identity Channels: Categorical Attributes

Spatial region



Color hue



Motion



Shape



Best


Effectiveness

Least

- **expressiveness principle**
 - match channel and data characteristics
- **effectiveness principle**
 - encode most important attributes with highest ranked channels
 - spatial position ranks high for both


Accuracy: Fundamental Theory

Steven's Psychophysical Power Law: $S = I^N$

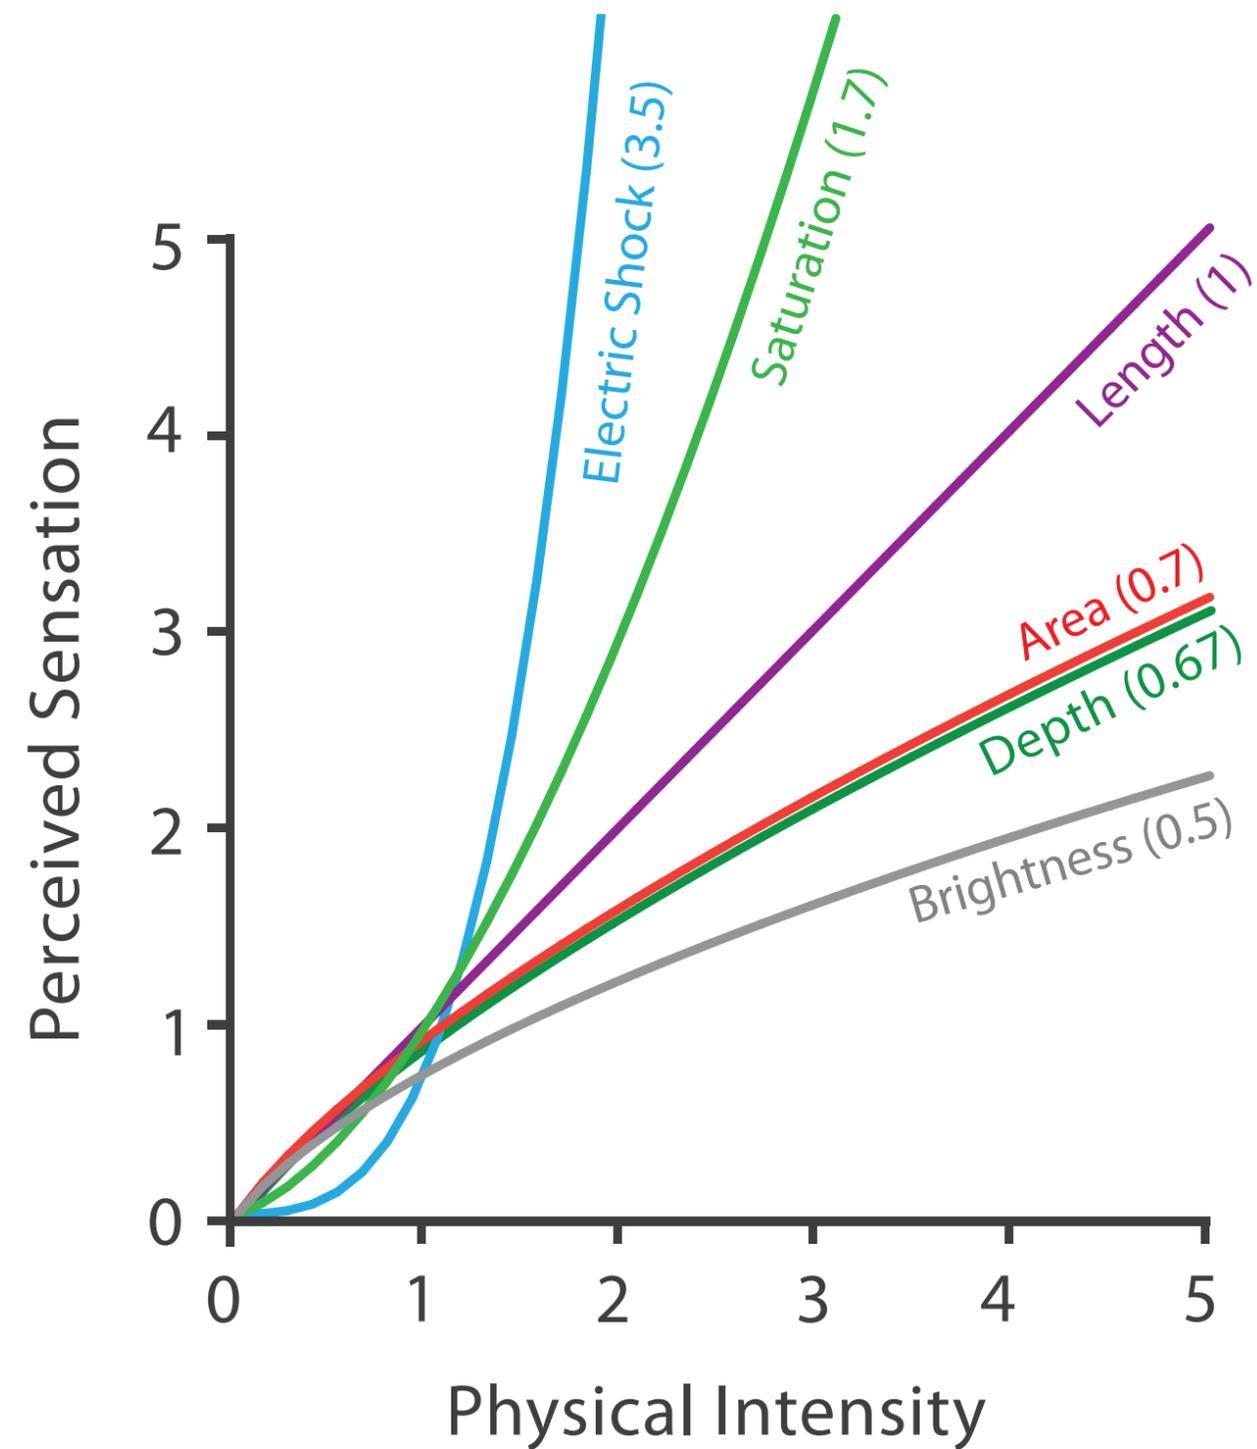


Accuracy: Vis experiments

Cleveland & McGill's Results

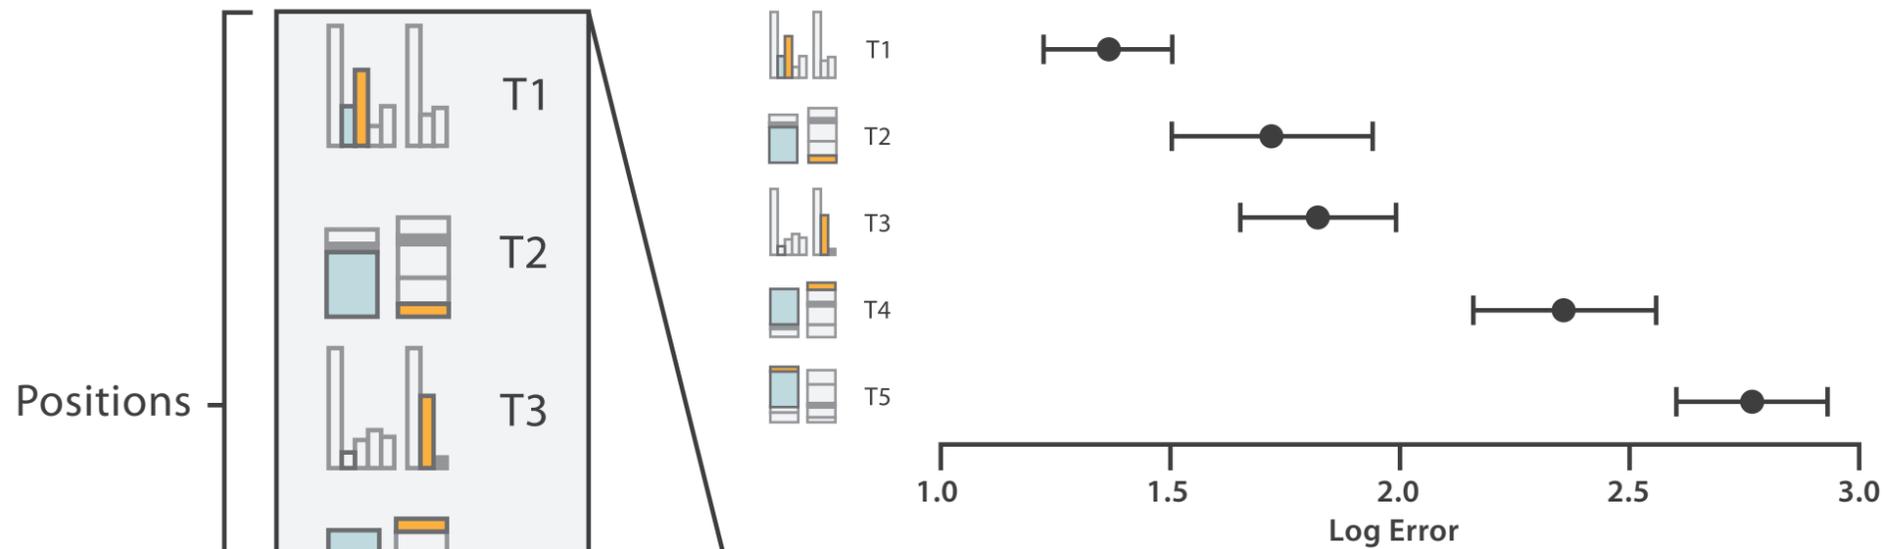


Crowdsourced Results

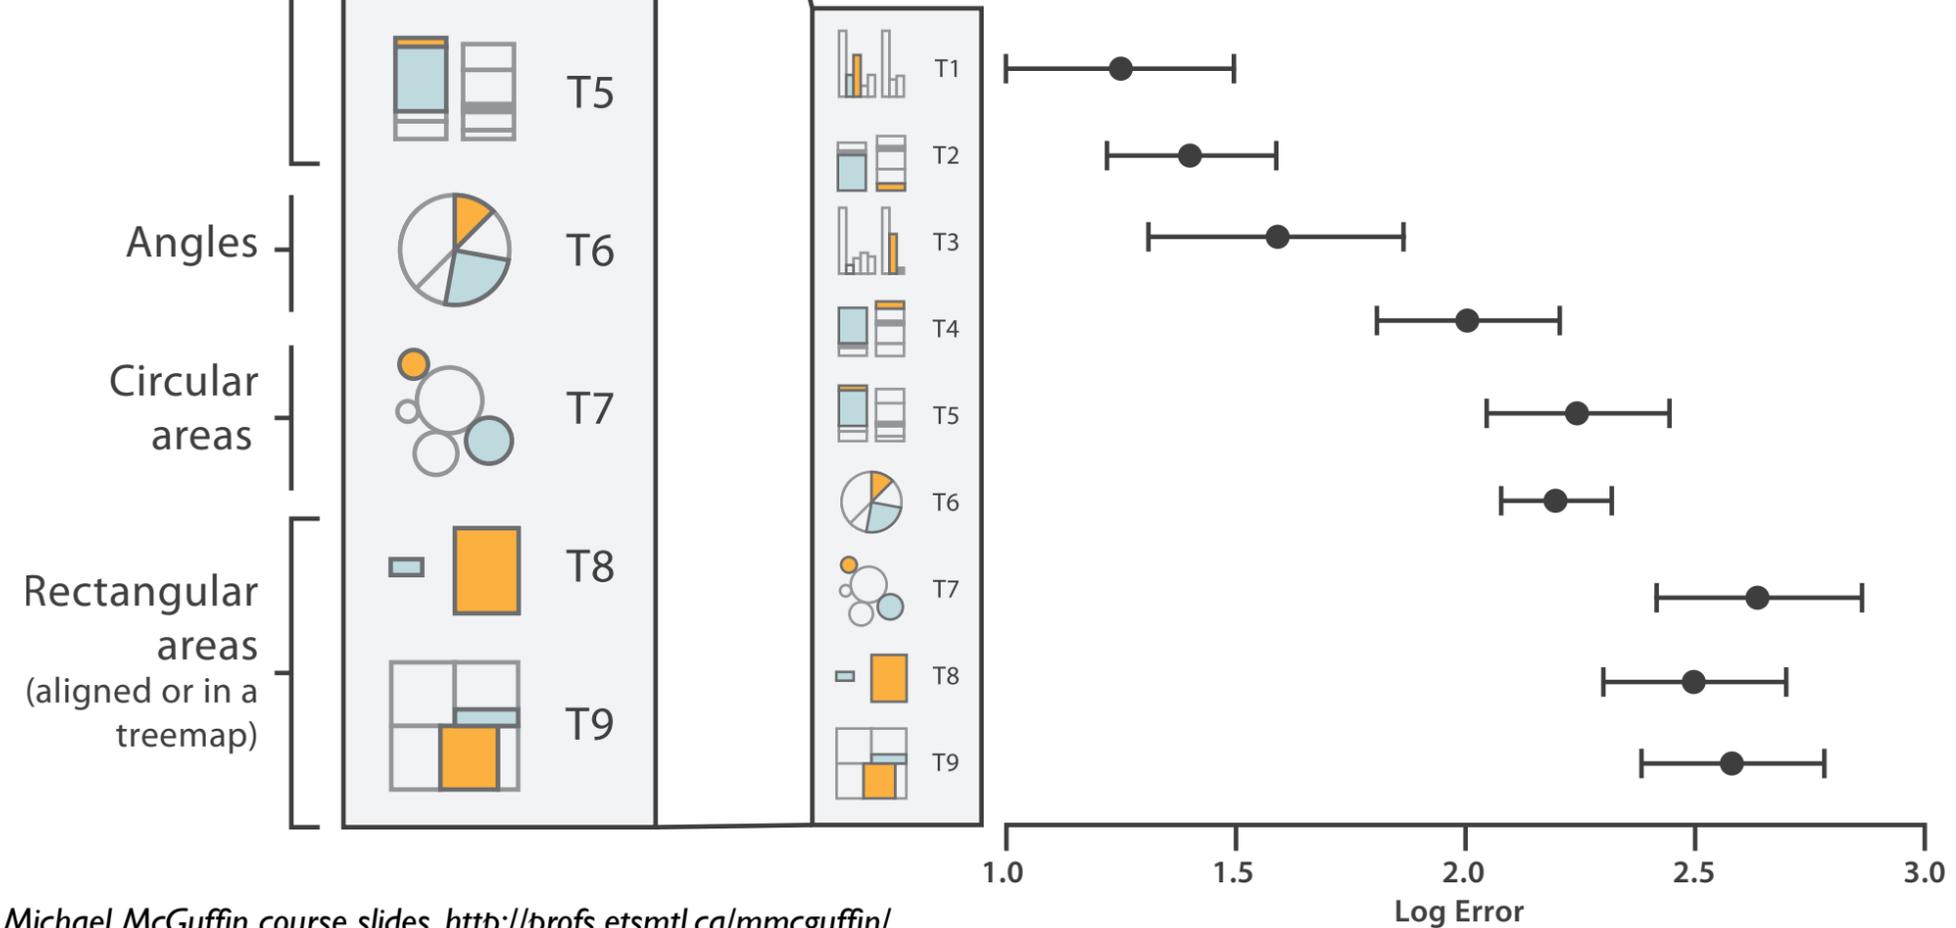

[Crowdsourcing Graphical Perception: Using Mechanical Turk to Assess Visualization Design. Heer and Bostock. Proc ACM Conf. Human Factors in Computing Systems (CHI) 2010, p. 203–212.]

Discriminability: How many usable steps?


- must be sufficient for number of attribute levels to show
 - linewidth: few bins

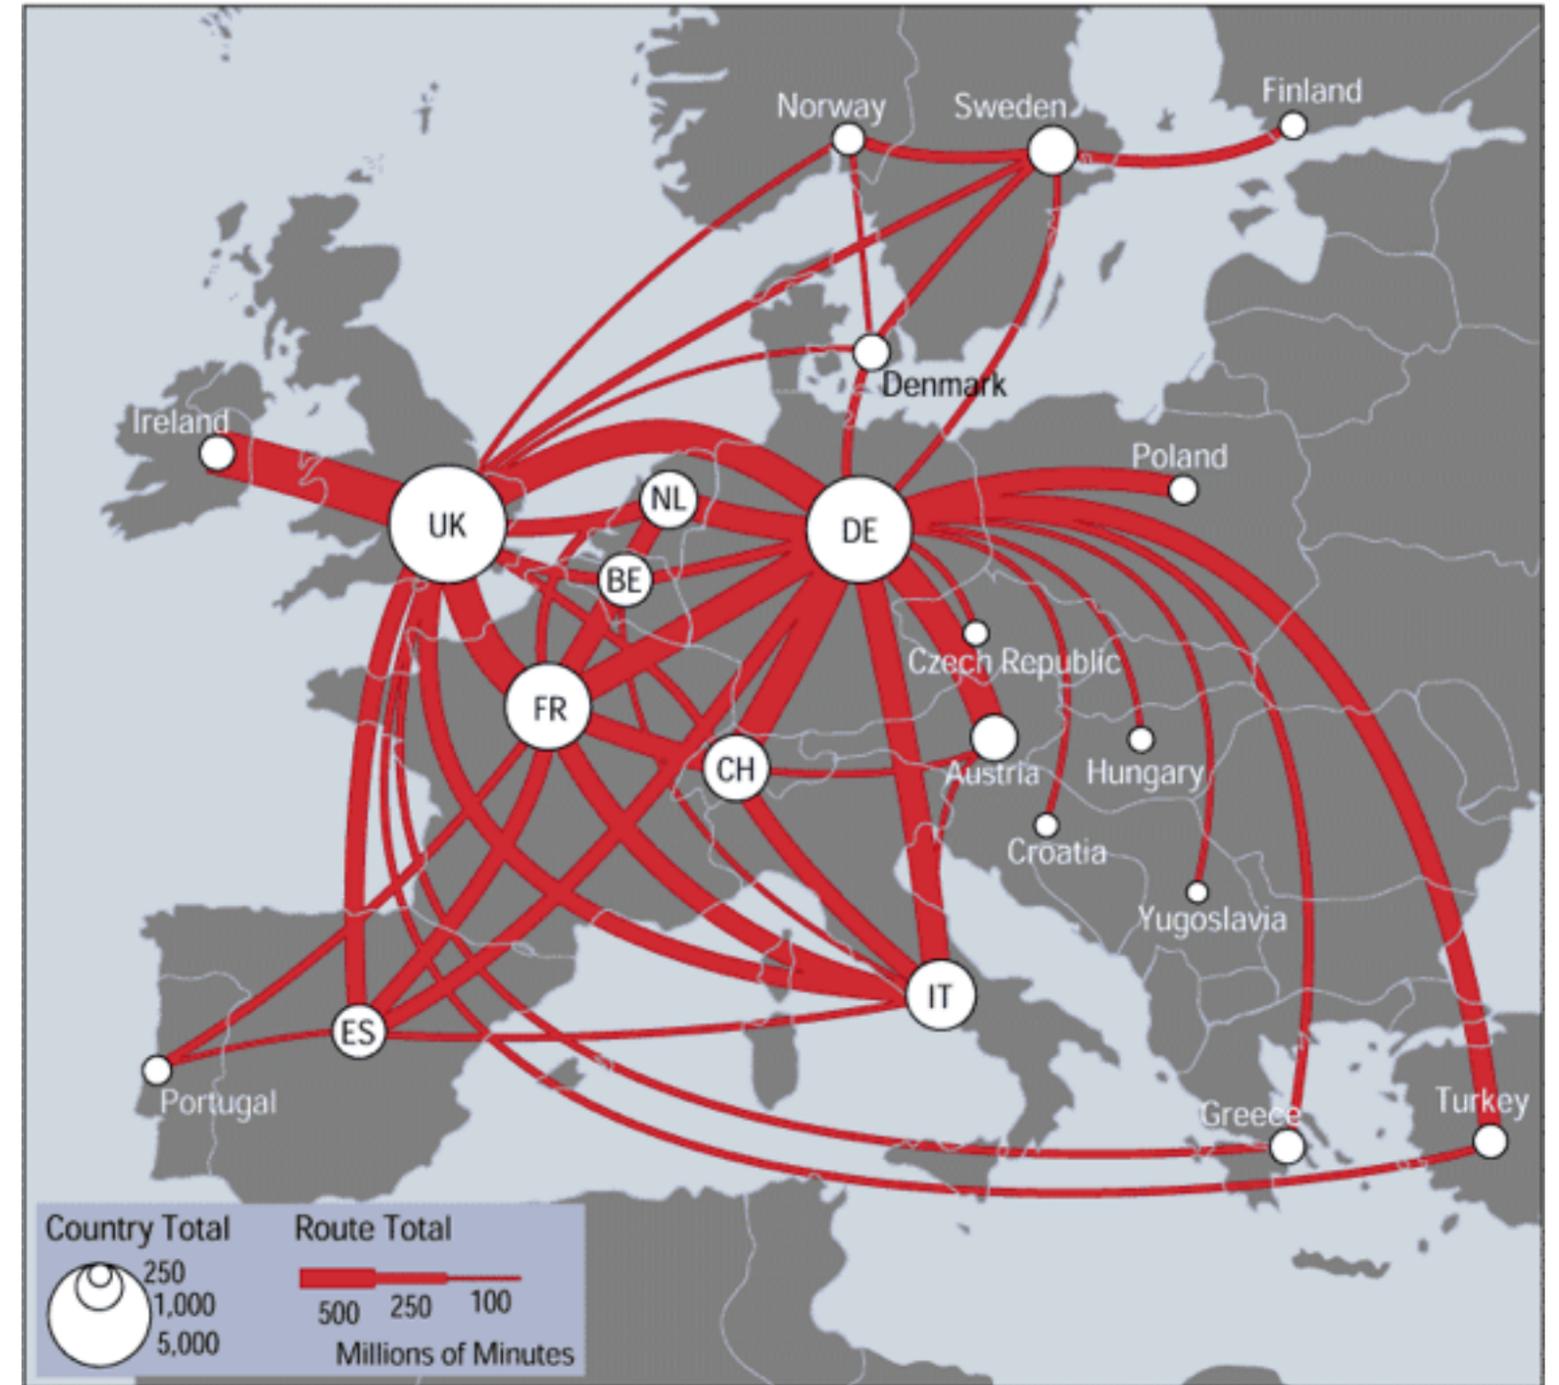

[mappa.mundi.net/maps/maps_014/telegeography.html]

Separability vs. Integrality


Position
+ Hue (Color)

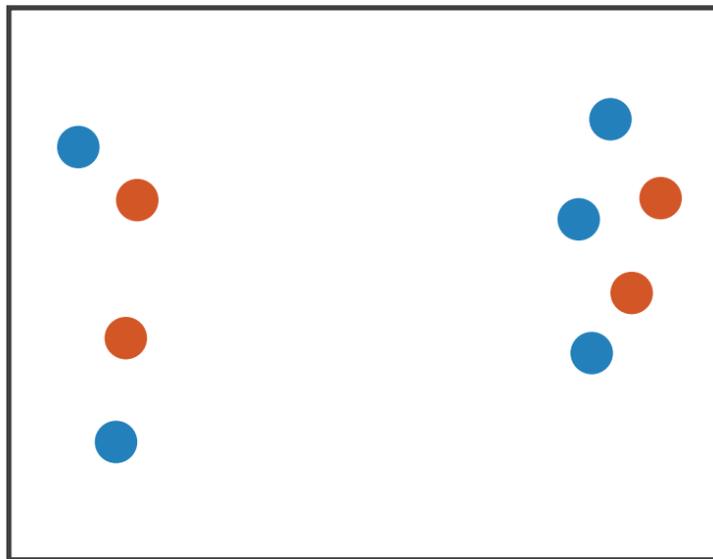

Fully separable

2 groups each


Size
+ Hue (Color)

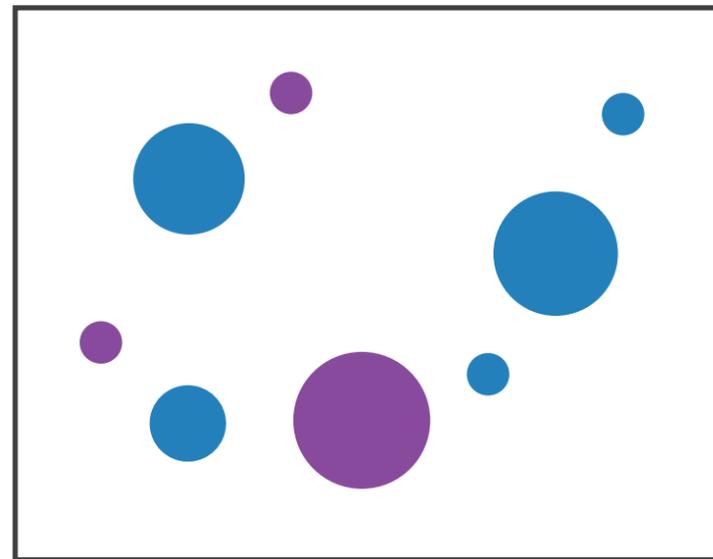

Some interference

2 groups each


Width
+ Height

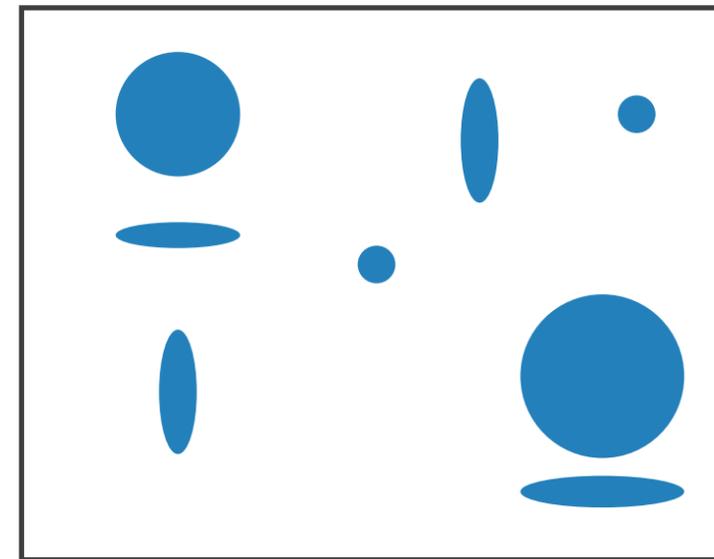

Some/significant
interference

3 groups total:
integral area

Red
+ Green

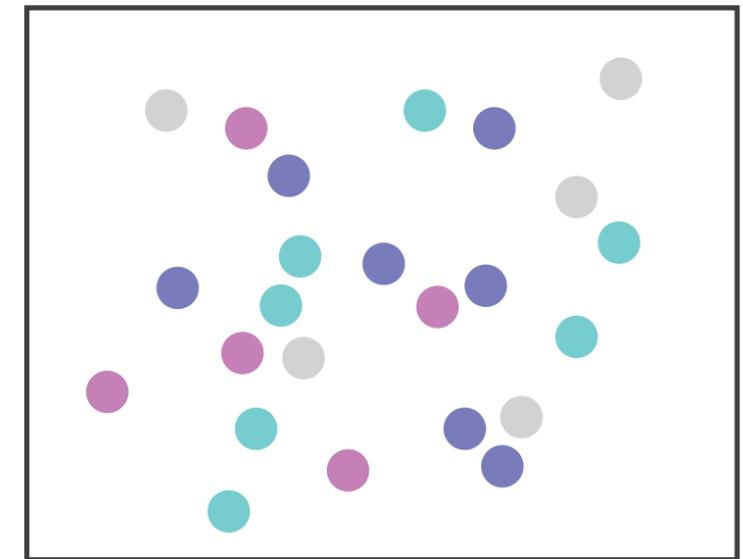


Major interference


4 groups total:
integral hue

Popout

- find the red dot
 - how long does it take?
- parallel processing on many individual channels
 - speed independent of distractor count
 - speed depends on channel and amount of difference from distractors
- serial search for (almost all) combinations
 - speed depends on number of distractors

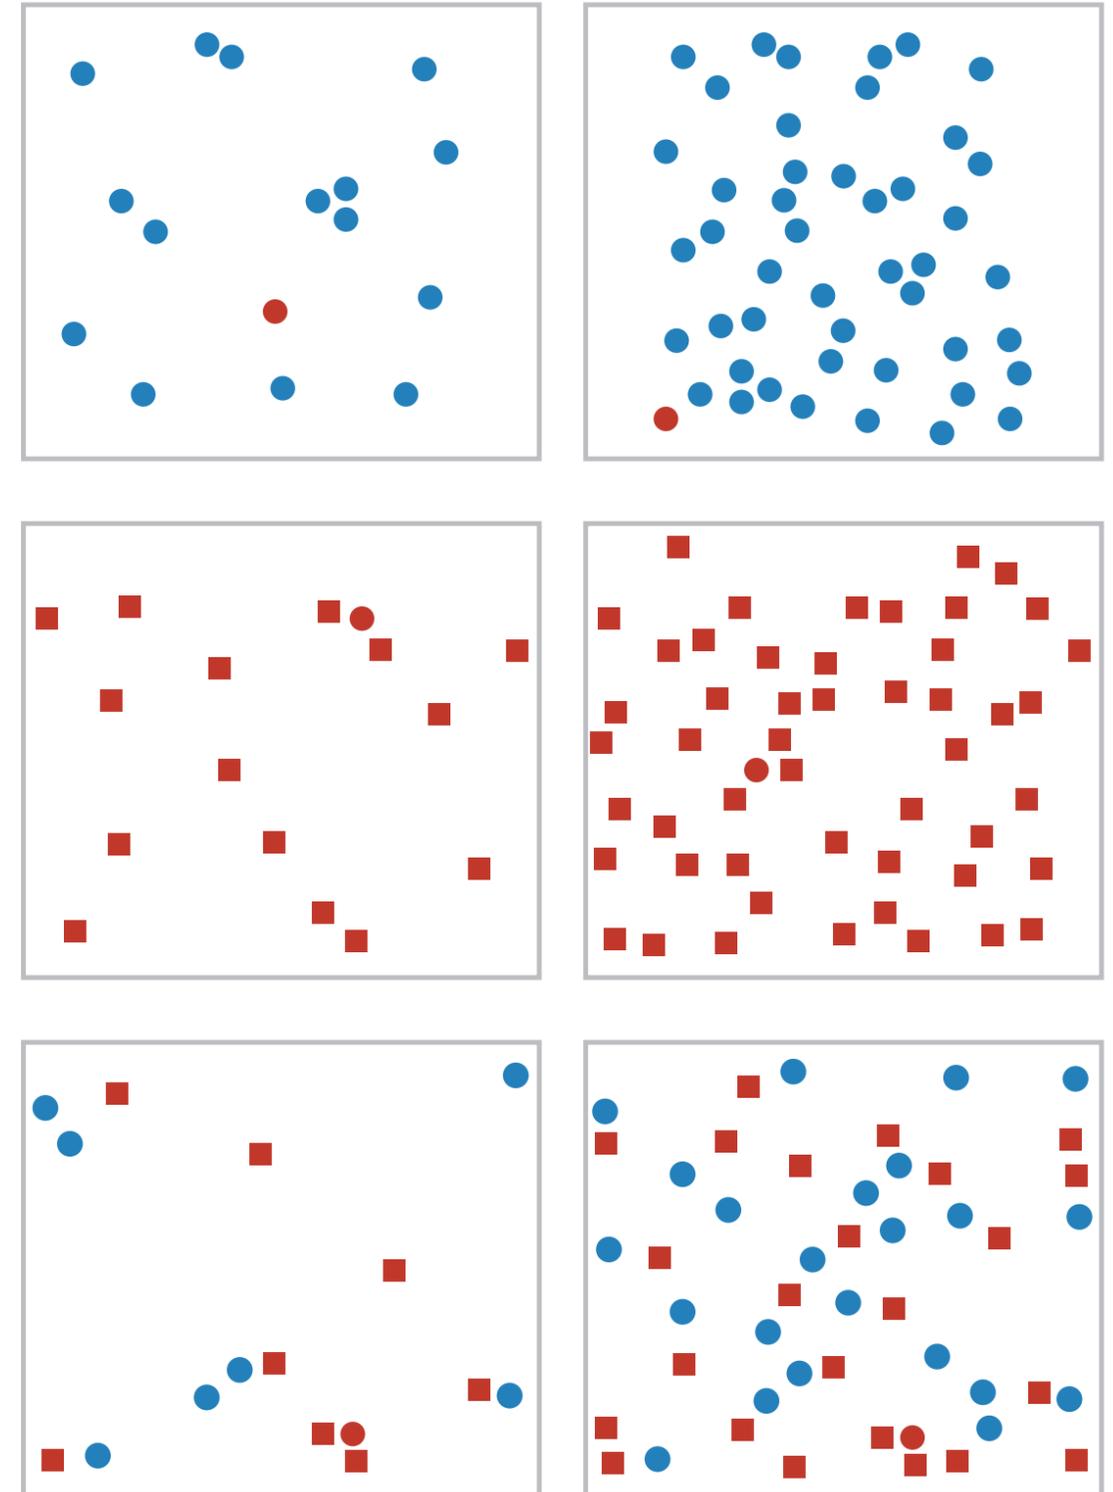

Popout

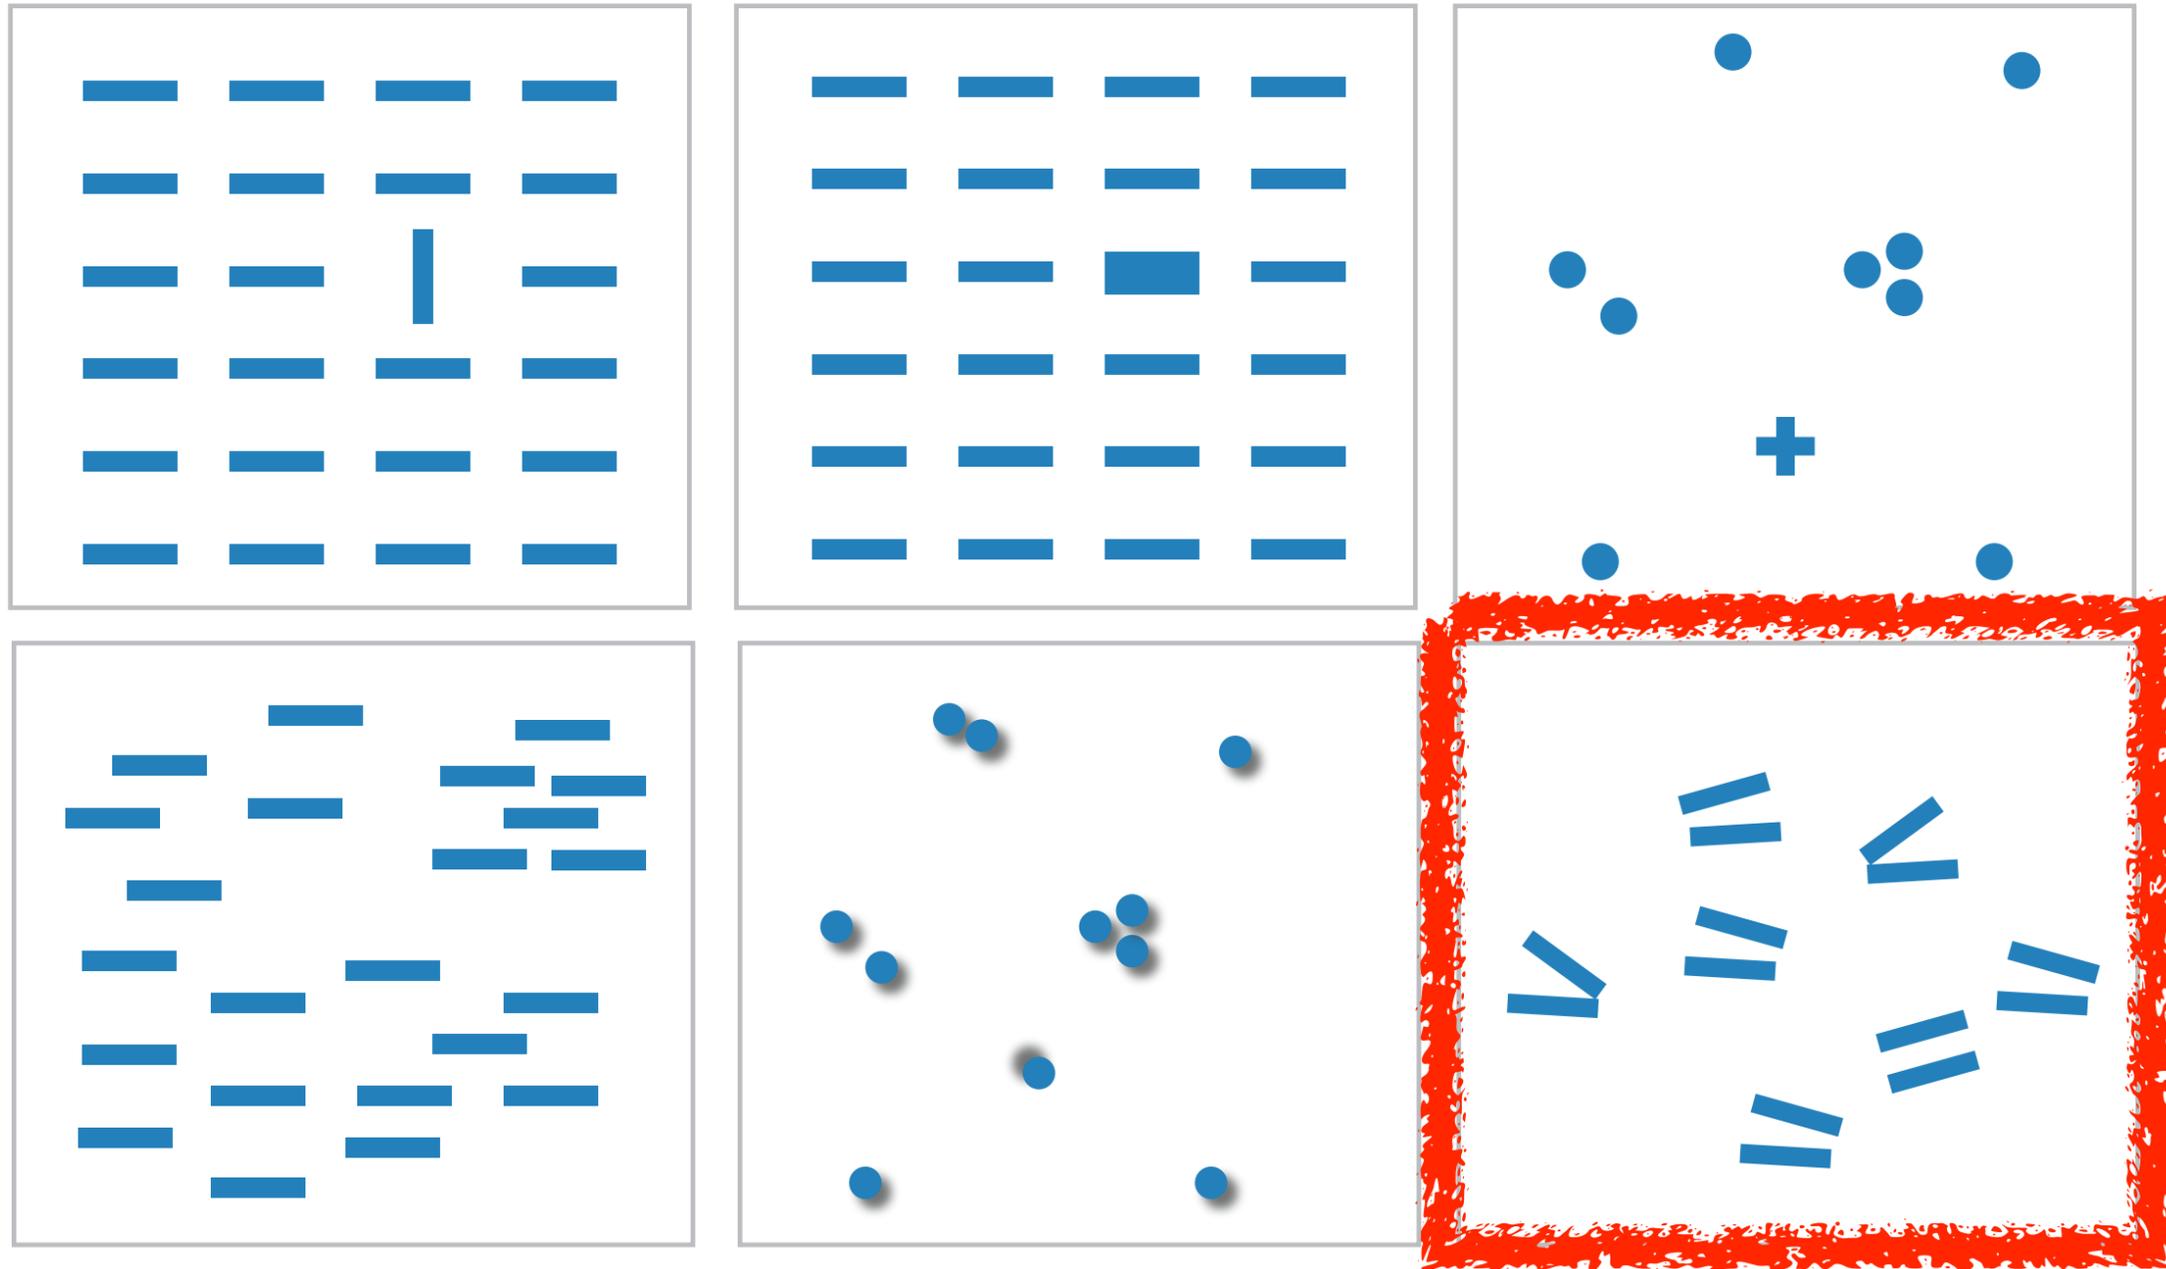

- many channels: tilt, size, shape, proximity, shadow direction, ...
- but not all! parallel line pairs do not pop out from tilted pairs

Grouping

- containment
- connection


- proximity
 - same spatial region
- similarity
 - same values as other categorical channels

Marks as Links

➔ Containment



➔ Connection

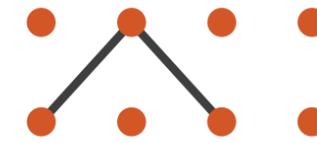

➔ Identity Channels: Categorical Attributes


Spatial region



Color hue



Motion

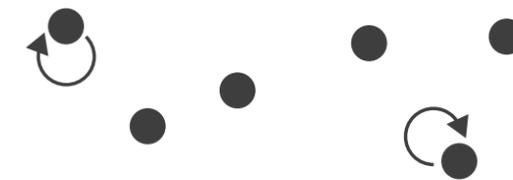

Shape




Relative vs. absolute judgements


- perceptual system mostly operates with relative judgements, not absolute
 - that's why accuracy increases with common frame/scale and alignment
 - Weber's Law: ratio of increment to background is constant
 - filled rectangles differ in length by 1:9, difficult judgement
 - white rectangles differ in length by 1:2, easy judgement



length

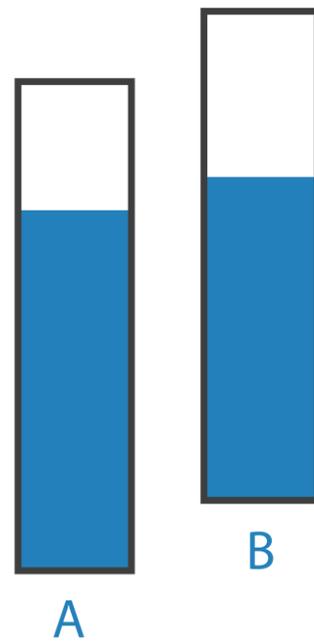


position along
unaligned
common scale

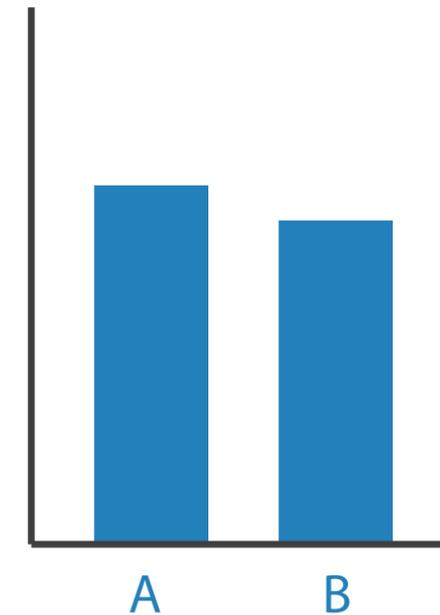

position along
aligned scale

Relative luminance judgements



- perception of luminance is contextual based on contrast with surroundings

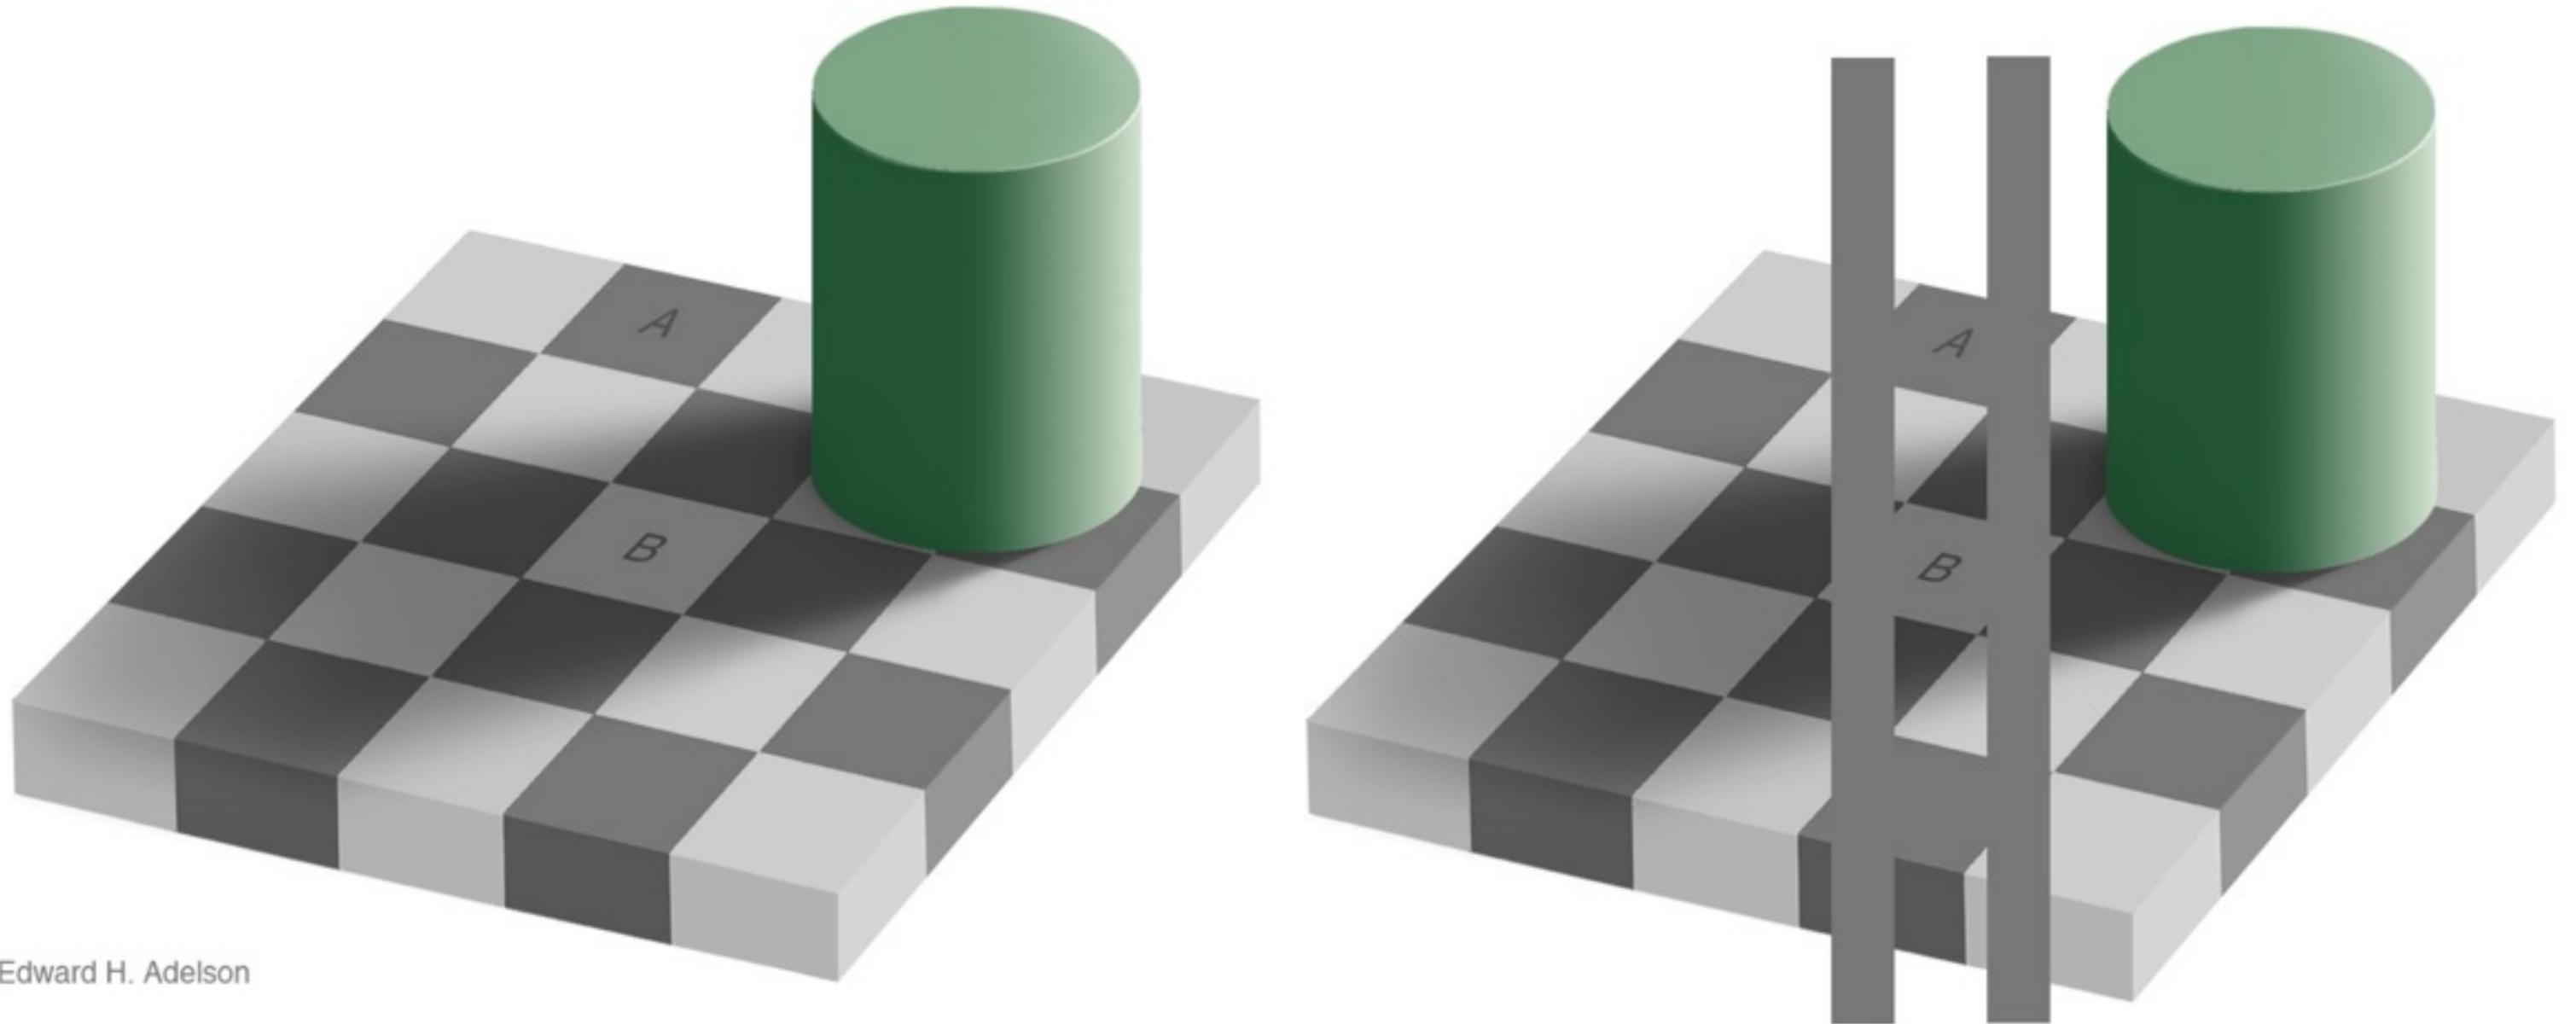

Edward H. Adelson

Relative color judgements

- color constancy across broad range of illumination conditions

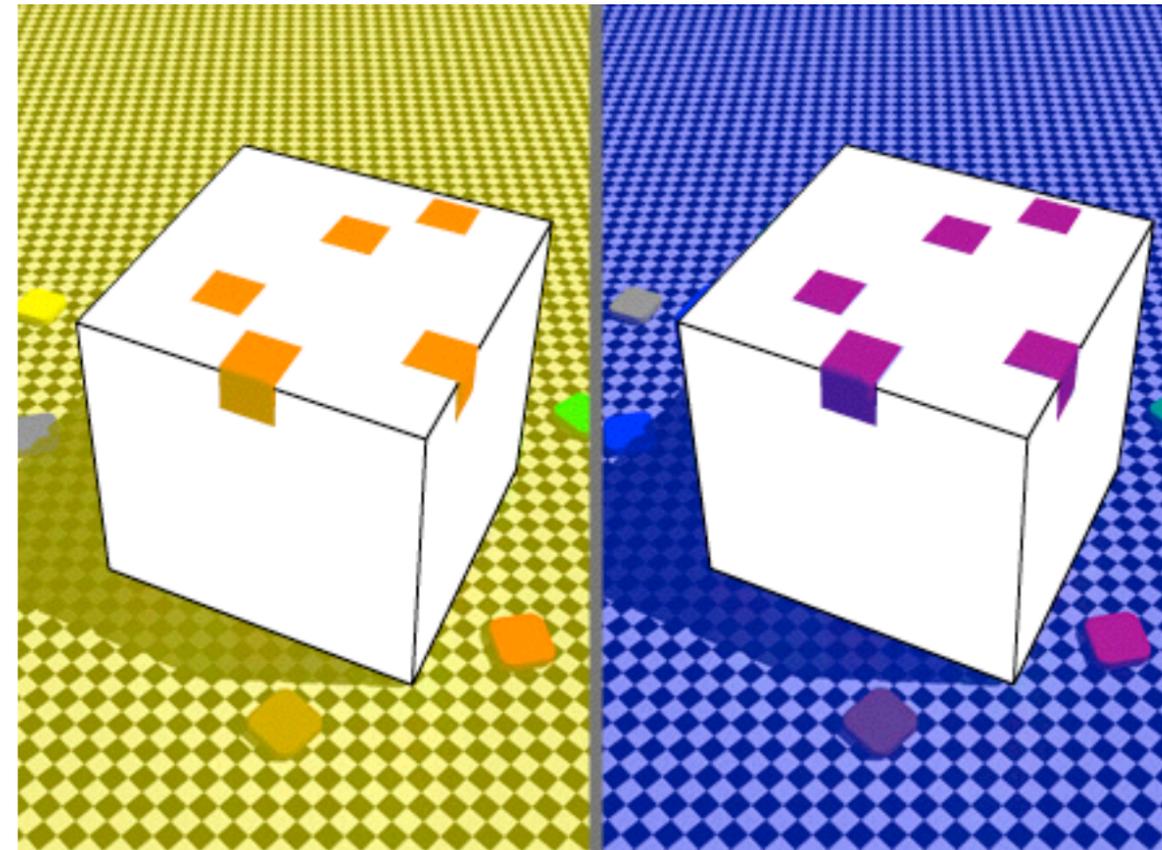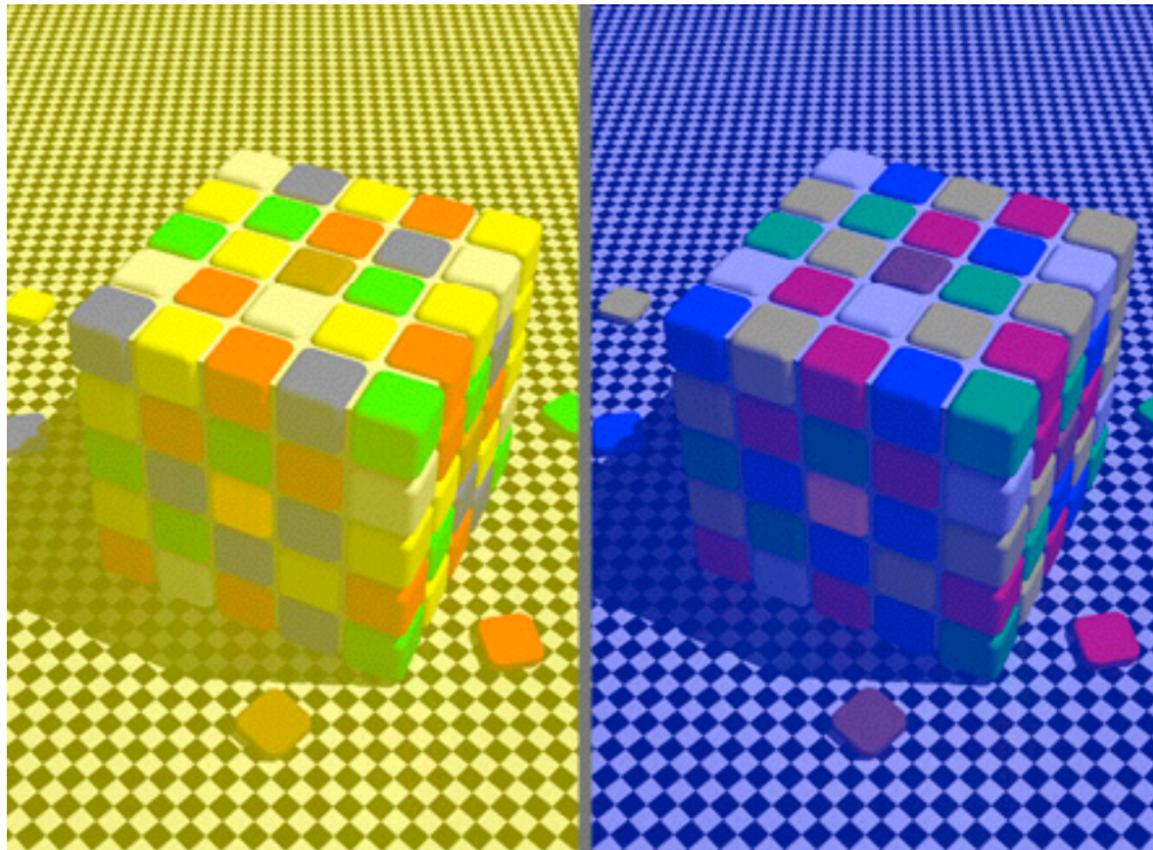

Further reading

- Visualization Analysis and Design. Munzner. AK Peters Visualization Series, CRC Press, 2014.
 - *Chap 5: Marks and Channels*
- *On the Theory of Scales of Measurement*. Stevens. Science 103:2684 (1946), 677–680.
- *Psychophysics: Introduction to its Perceptual, Neural, and Social Prospects*. Stevens. Wiley, 1975.
- *Graphical Perception: Theory, Experimentation, and Application to the Development of Graphical Methods*. Cleveland and McGill. Journ. American Statistical Association 79:387 (1984), 531–554.
- *Perception in Vision*. Healey. <http://www.csc.ncsu.edu/faculty/healey/PP>
- *Visual Thinking for Design*. Ware. Morgan Kaufmann, 2008.
- *Information Visualization: Perception for Design*, 3rd edition. Ware. Morgan Kaufmann /Academic Press, 2004.

Outline

- **Session 1 8:30-10:00am**
Visualization Analysis Framework
 - Introduction: Definitions
 - Analysis: What, Why, How
 - Marks and Channels
- **Session 2 10:30am-12:00pm**
Spatial Layout
 - **Arrange Tables**
 - Arrange Spatial Data
 - Arrange Networks and Trees
- **Session 3 1:00-2:30pm**
Color & Interaction
 - Map Color
 - Manipulate: Change, Select, Navigate
 - Facet: Juxtapose, Partition, Superimpose
- **Session 4 3:00-4:30pm**
Guidelines and Examples
 - Reduce: Filter, Aggregate
 - Rules of Thumb
 - Q&A

How?

Encode

→ Arrange

→ Express



→ Separate



→ Order



→ Align



→ Use



→ Map

from **categorical** and **ordered** attributes

→ Color

→ Hue



→ Saturation



→ Luminance



→ Size, Angle, Curvature, ...



→ Shape




→ Motion

Direction, Rate, Frequency, ...



Manipulate

→ Change

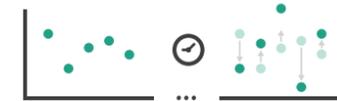

→ Select



→ Navigate



Facet


→ Juxtapose



→ Partition




→ Superimpose

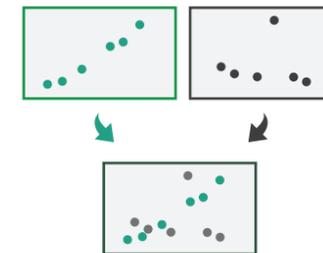


Reduce

→ Filter

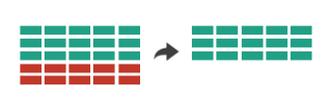

→ Aggregate



→ Embed



What?

Why?

How?

Encode tables: Arrange space

Encode

➔ Arrange


➔ Express




➔ Separate



➔ Order

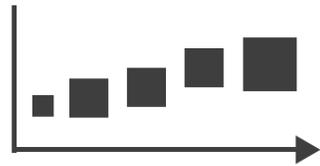

➔ Align

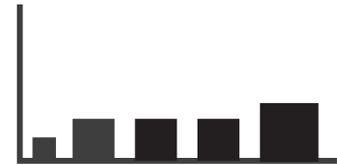


Arrange tables

→ Express Values




→ Separate, Order, Align Regions

→ Separate

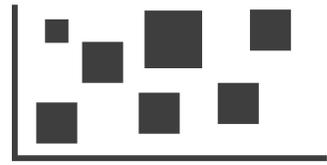

→ Order

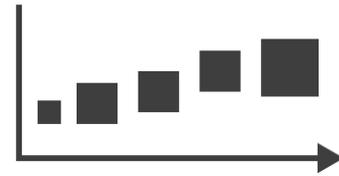


→ Align




→ 1 Key
List



→ 2 Keys
Matrix



→ 3 Keys
Volume




→ Many Keys
Recursive Subdivision




→ Axis Orientation


→ Rectilinear



→ Parallel




→ Radial

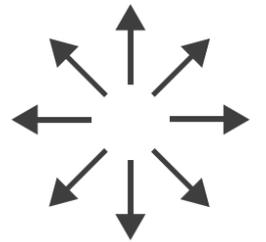

→ Layout Density

→ Dense

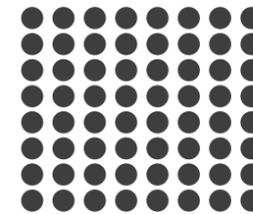


→ Space-Filling




Keys and values

- key
 - independent attribute
 - used as unique index to look up items
 - simple tables: 1 key
 - multidimensional tables: multiple keys
- value
 - dependent attribute, value of cell
- classify arrangements by key count
 - 0, 1, 2, many...

→ Tables

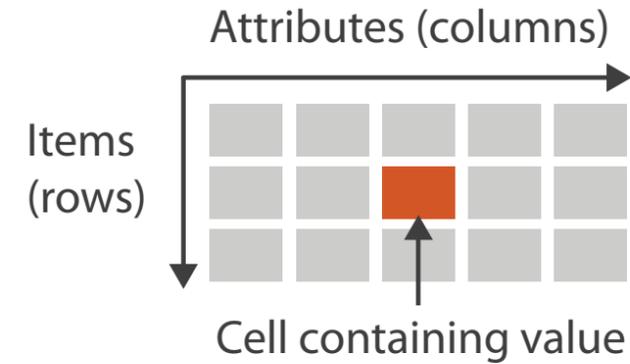

→ *Multidimensional Table*

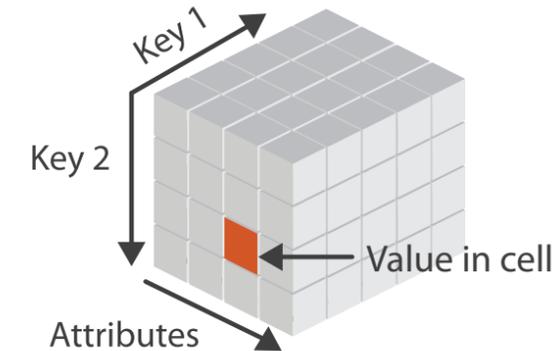



⊕ Express Values

→ 1 Key
List

→ 2 Keys
Matrix

→ 3 Keys
Volume




→ Many Keys
Recursive Subdivision



Idiom: scatterplot


- *express* values
 - quantitative attributes
- no keys, only values
 - data
 - 2 quant attribs
 - mark: points
 - channels
 - horiz + vert position
 - tasks
 - find trends, outliers, distribution, correlation, clusters
 - scalability
 - hundreds of items

➔ Express Values

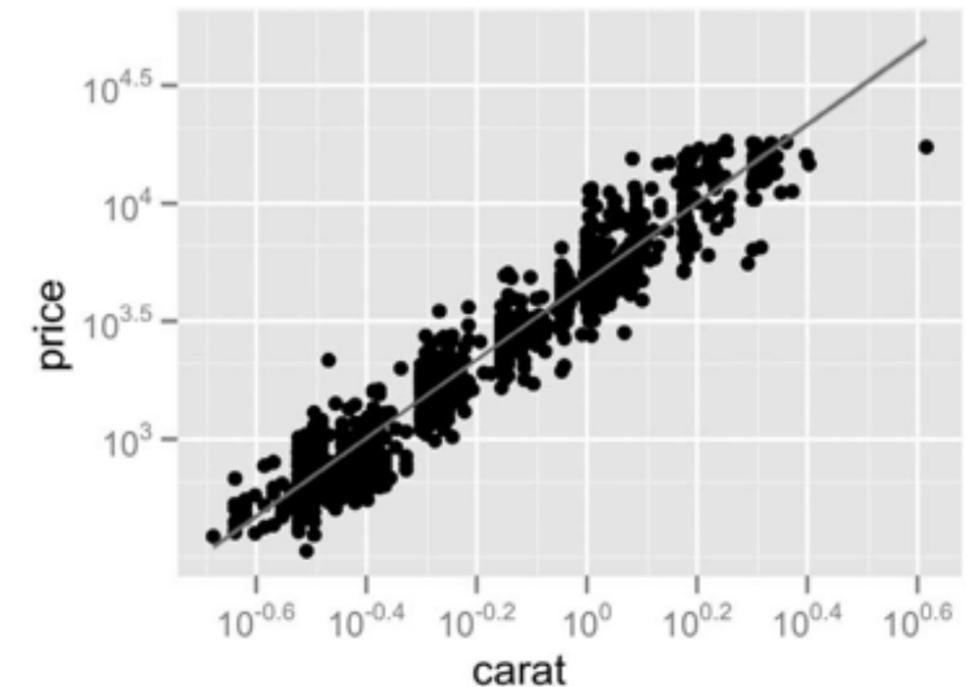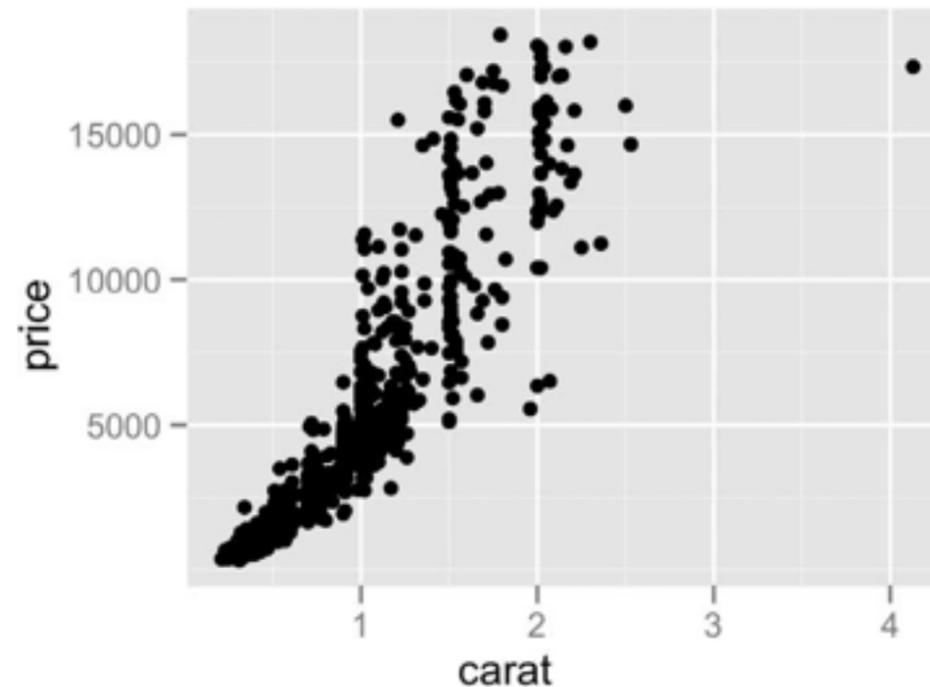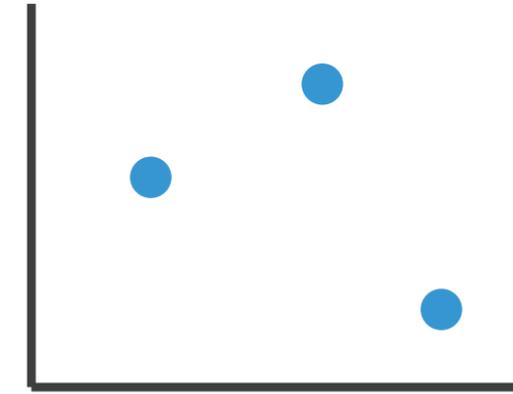


Some keys: Categorical regions


→ Separate

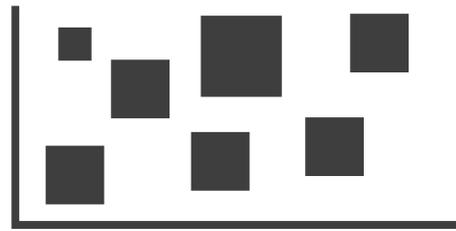

→ Order

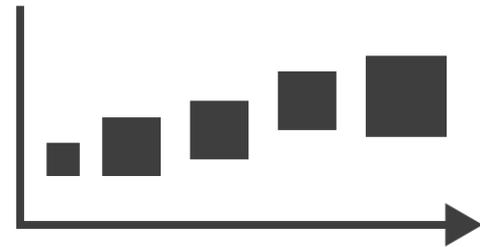


→ Align

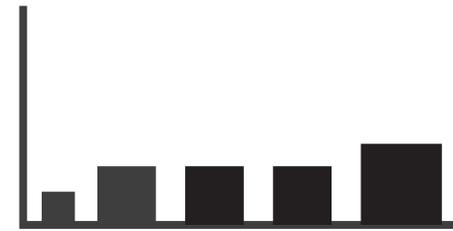


- **regions:** contiguous bounded areas distinct from each other
 - using space to *separate* (proximity)
 - following expressiveness principle for categorical attributes
- use ordered attribute to *order* and *align* regions


→ 1 Key
List

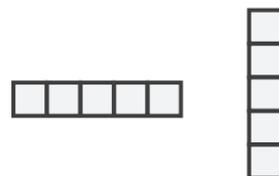

→ 2 Keys
Matrix



→ 3 Keys
Volume



→ Many Keys
Recursive Subdivision



Idiom: bar chart

- one key, one value

- data

- 1 categ attrib, 1 quant attrib

- mark: lines

- channels

- length to express quant value
- spatial regions: one per mark
 - separated horizontally, aligned vertically
 - ordered by quant attrib



» by label (alphabetical), by length attrib (data-driven)

- task

- compare, lookup values

- scalability

- dozens to hundreds of levels for key attrib

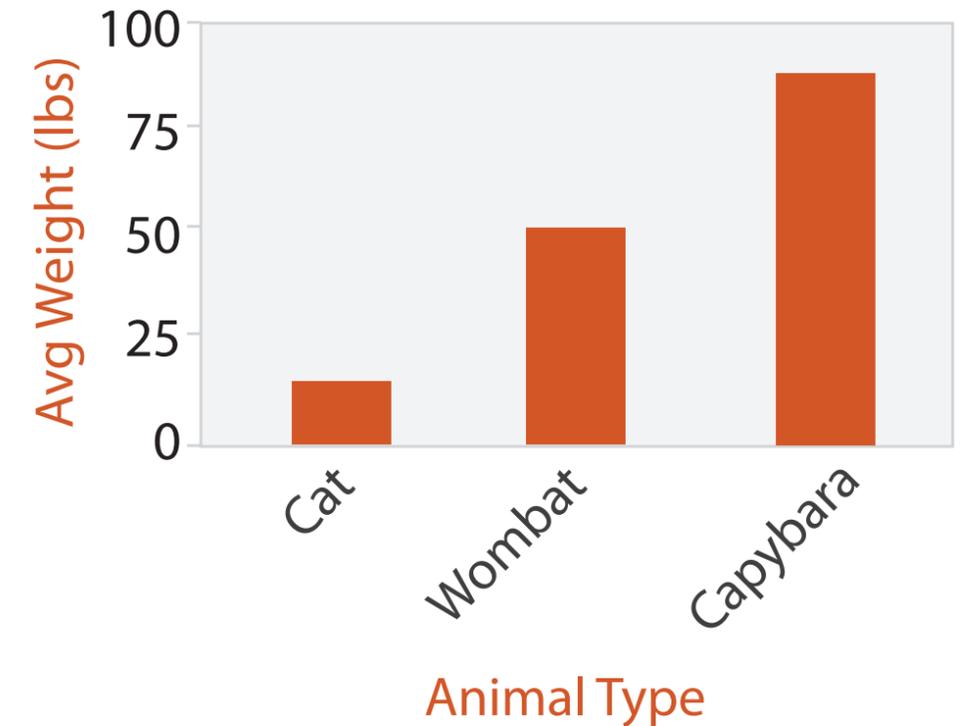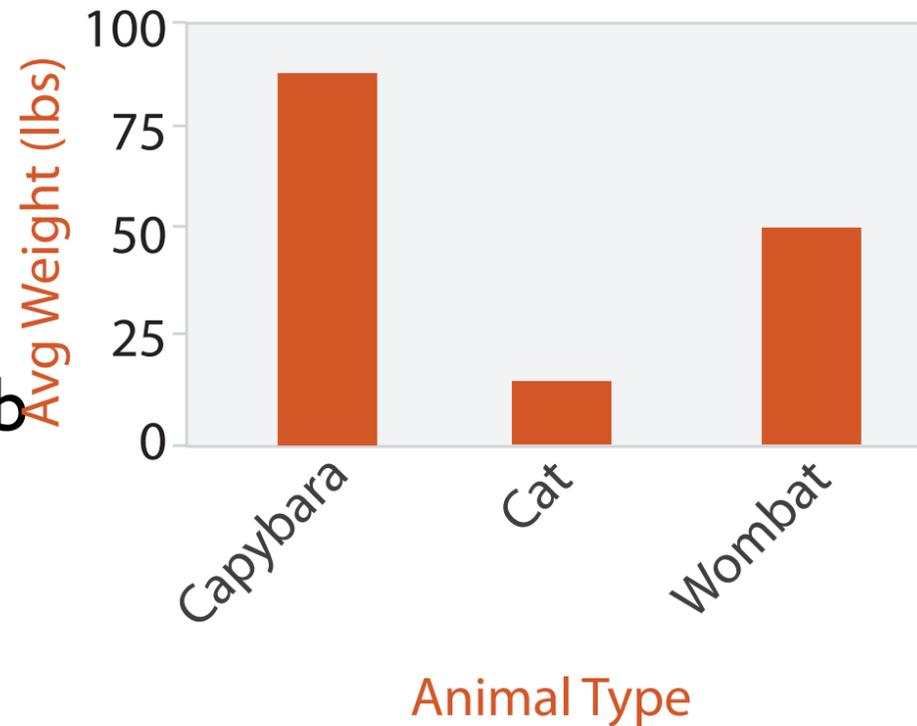

Idiom: **line chart**

- one key, one value

- data

- 2 quant attribs

- mark: points

- line connection marks between them


- channels

- aligned lengths to express quant value
- separated and ordered by key attrib into horizontal regions

- task


- find trend

- connection marks emphasize ordering of items along key axis by explicitly showing relationship between one item and the next

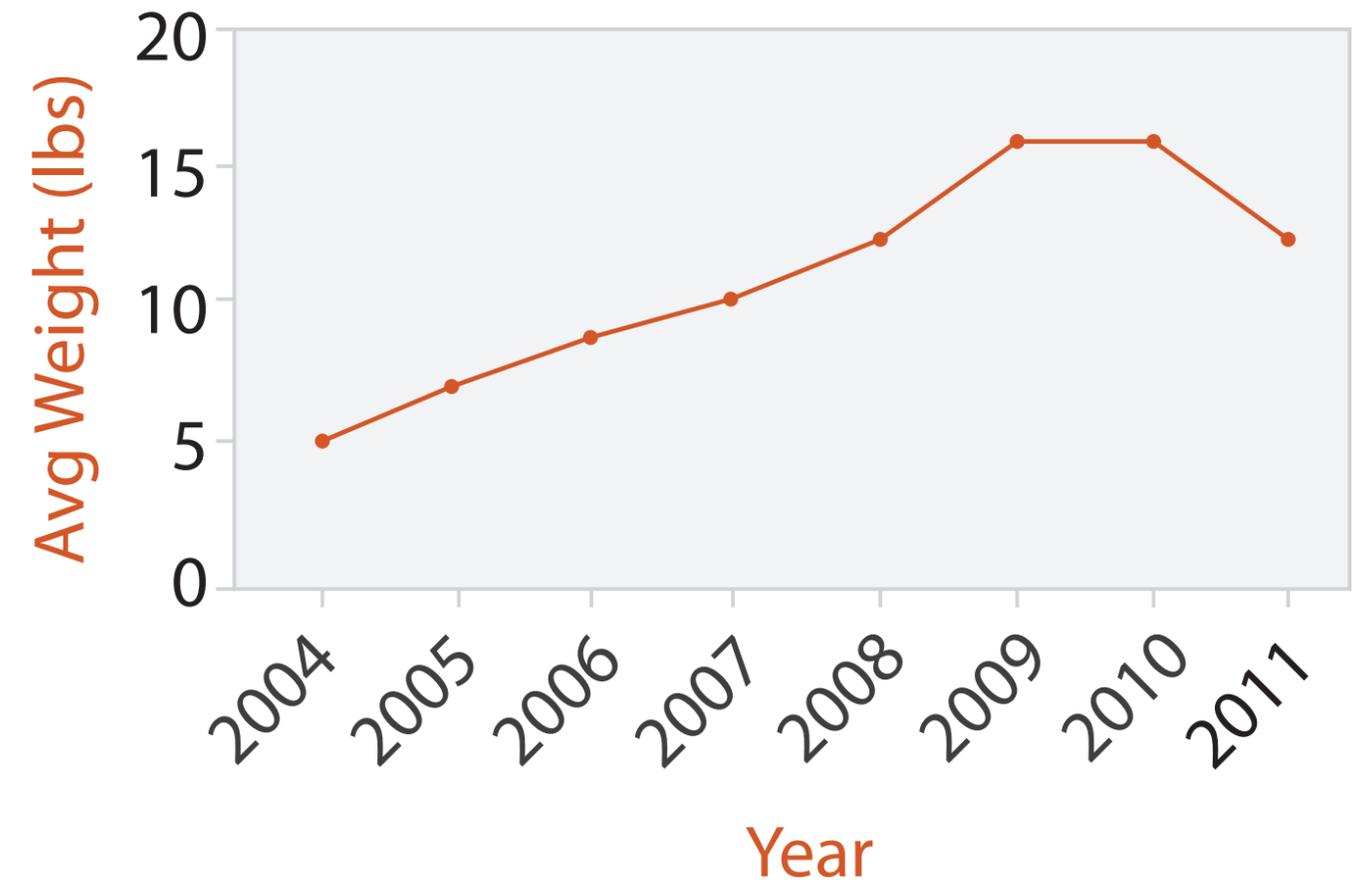

Idiom: stacked bar chart

- one more key
 - data
 - 2 categ attrib, 1 quant attrib
 - mark: vertical stack of line marks
 - **glyph**: composite object, internal structure from multiple marks
 - channels
 - length and color hue
 - spatial regions: one per glyph
 - aligned: full glyph, lowest bar component
 - unaligned: other bar components
 - task
 - part-to-whole relationship
 - scalability
 - several to one dozen levels for stacked attrib

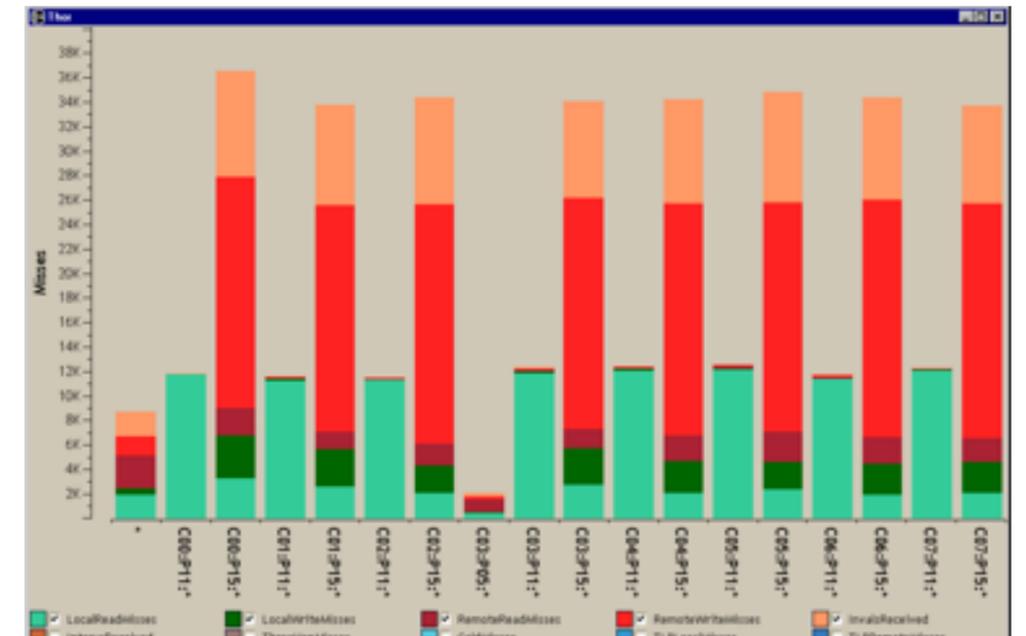

[Using Visualization to Understand the Behavior of Computer Systems. Bosch. Ph.D. thesis, Stanford Computer Science, 2001.]

Idiom: streamgraph

- generalized stacked graph

- emphasizing horizontal continuity

- vs vertical items

- data

- | categ key attrib (artist)
- | ordered key attrib (time)
- | quant value attrib (counts)


- derived data

- geometry: layers, where height encodes counts
- | quant attrib (layer ordering)

- scalability

- hundreds of time keys
- dozens to hundreds of artist keys





- more than stacked bars, since most layers don't extend across whole chart

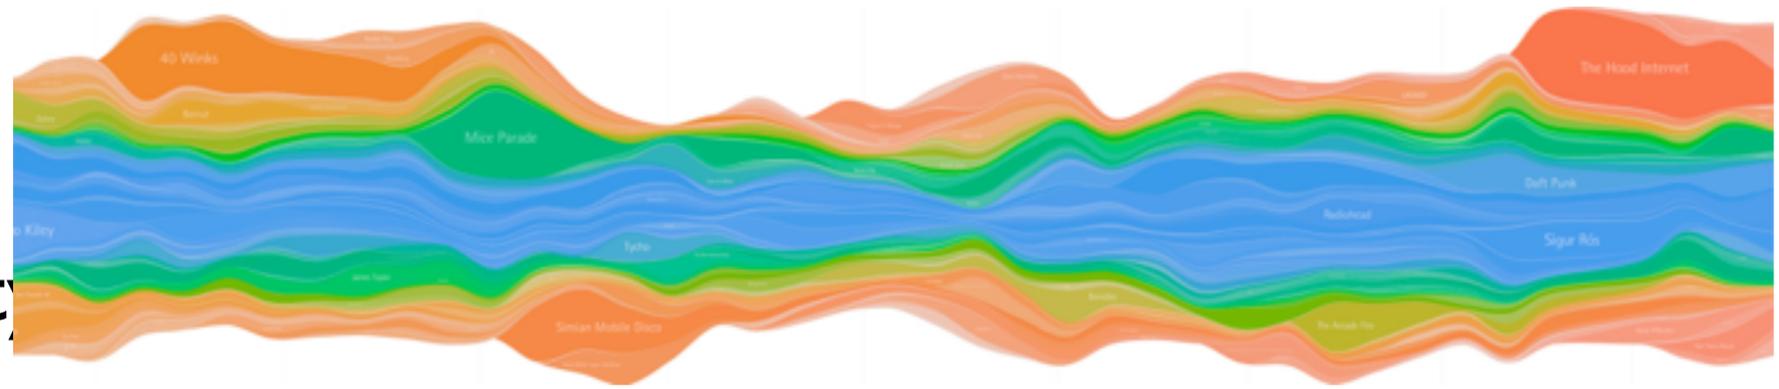

[Stacked Graphs Geometry & Aesthetics. Byron and Wattenberg. IEEE Trans. Visualization and Computer Graphics (Proc. InfoVis 2008) 14(6): 1245–1252, (2008).]

Choosing bar vs line charts

- depends on type of key attrib
 - bar charts if categorical
 - line charts if ordered
- do not use line charts for categorical key attribs
 - violates expressiveness principle
 - implication of trend so strong that it overrides semantics!
 - “The more male a person is, the taller he/she is”

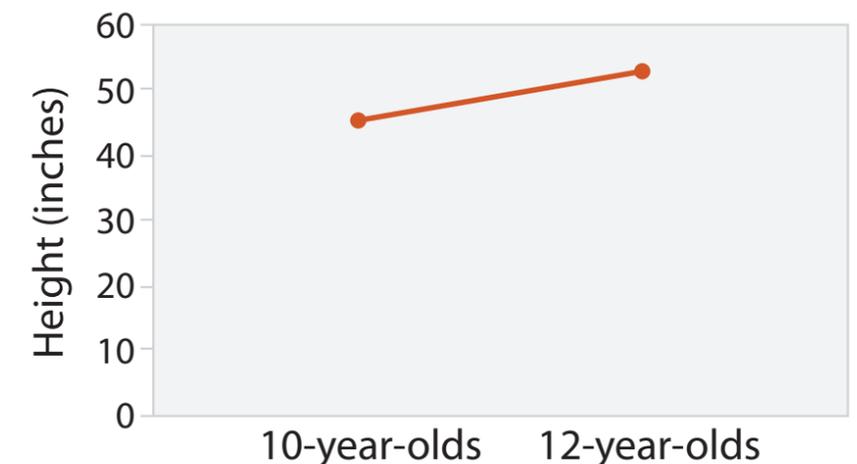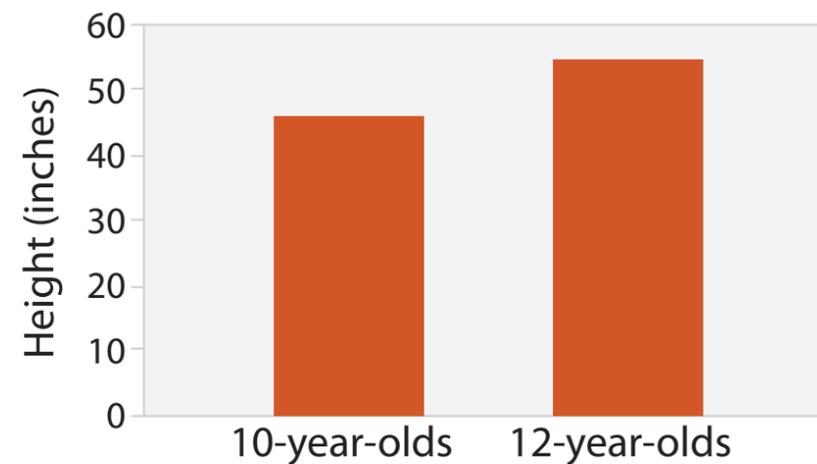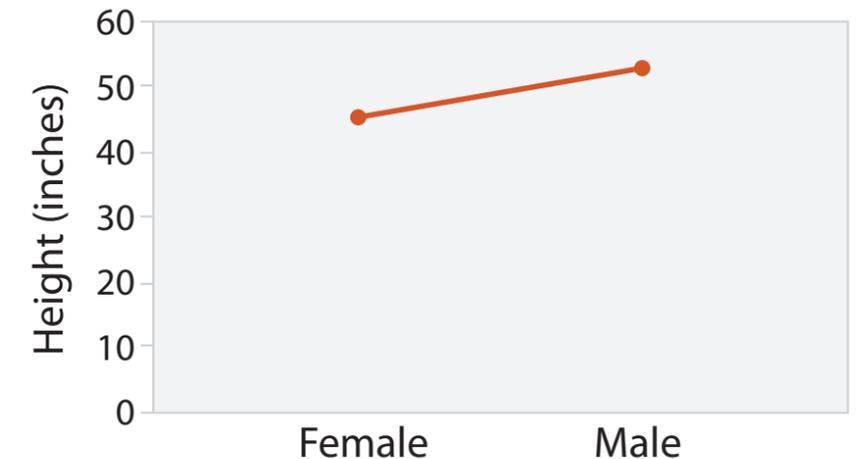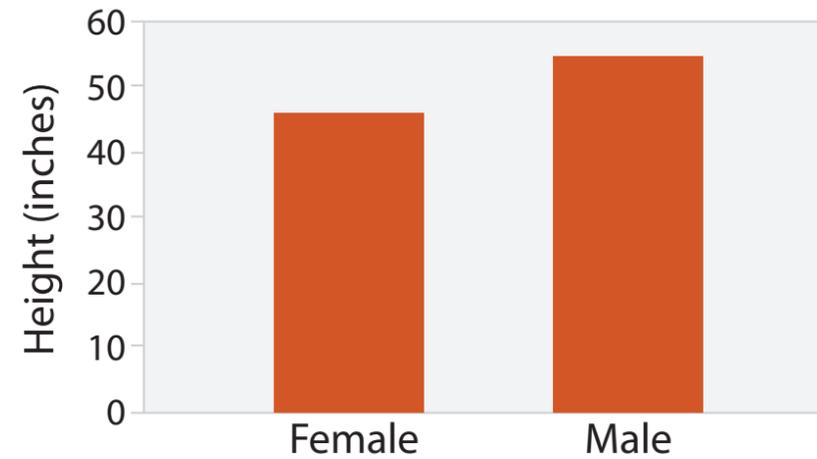

after [Bars and Lines: A Study of Graphic Communication. Zacks and Tversky. *Memory and Cognition* 27:6 (1999), 1073–1079.]

Idiom: heatmap

- two keys, one value

- data

- 2 categ attribs (gene, experimental condition)
- 1 quant attrib (expression levels)

- marks: area

- separate and align in 2D matrix
 - indexed by 2 categorical attributes

- channels


- color by quant attrib
 - (ordered diverging colormap)

- task


- find clusters, outliers

- scalability


- 1M items, 100s of categ levels, ~10 quant attrib levels

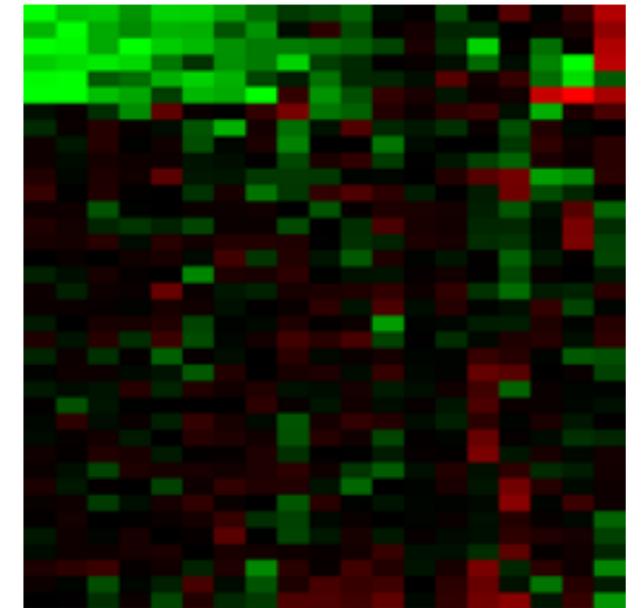

→ 1 Key
List

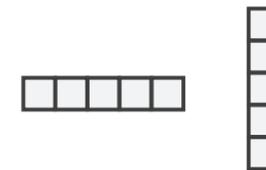

→ 2 Keys
Matrix

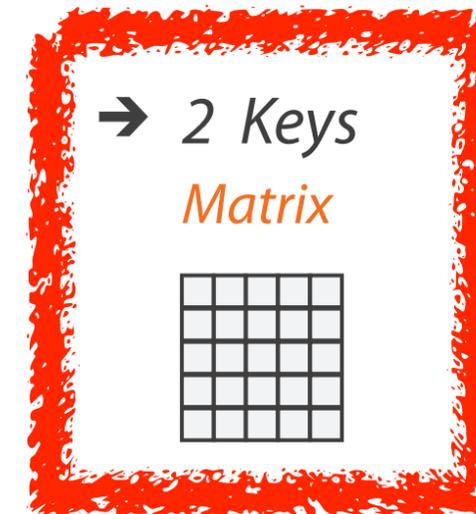


→ Many Keys
Recursive Subdivision




➔ Axis Orientation


➔ Rectilinear

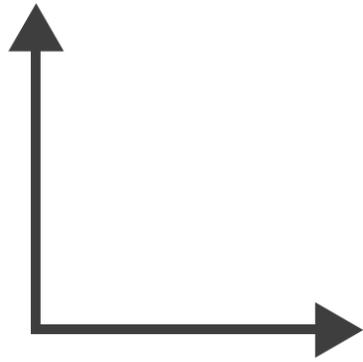

➔ Parallel

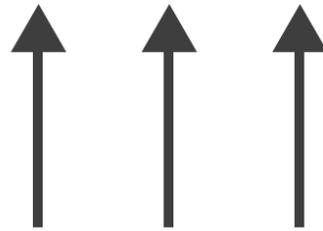

➔ Radial

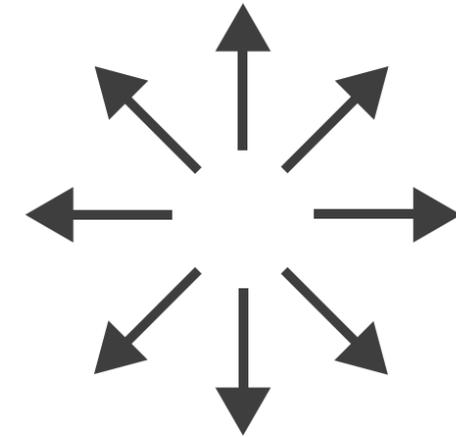

Idioms: scatterplot matrix, parallel coordinates


- scatterplot matrix (SPLOM)

- rectilinear axes, point mark
- all possible pairs of axes
- scalability
 - one dozen attribs
 - dozens to hundreds of items


- parallel coordinates

- parallel axes, jagged line representing item
- rectilinear axes, item as point
 - axis ordering is major challenge
- scalability
 - dozens of attribs
 - hundreds of items

Scatterplot Matrix

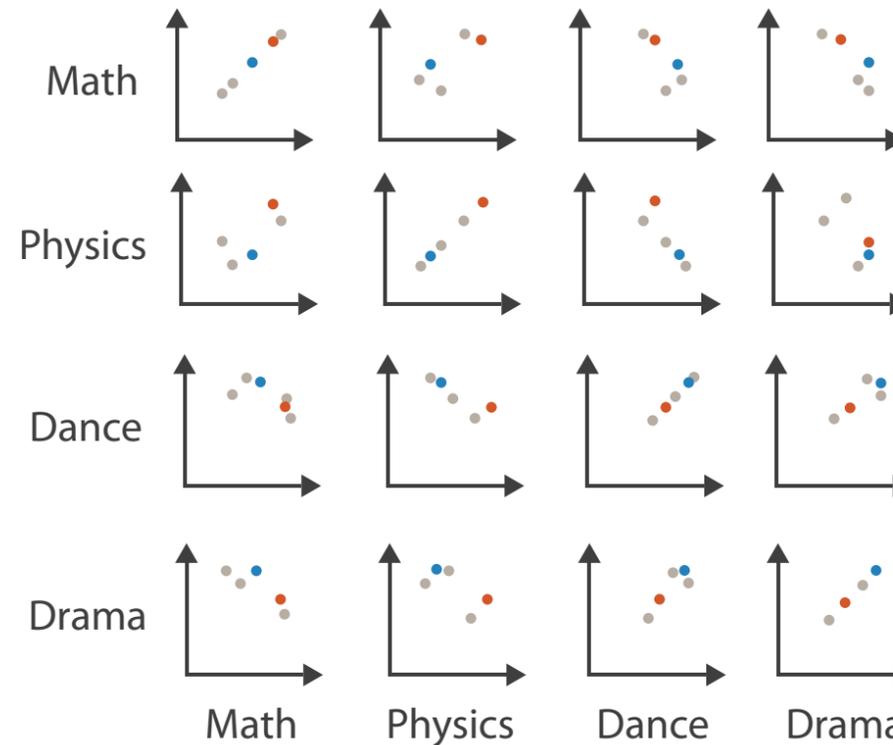

Parallel Coordinates

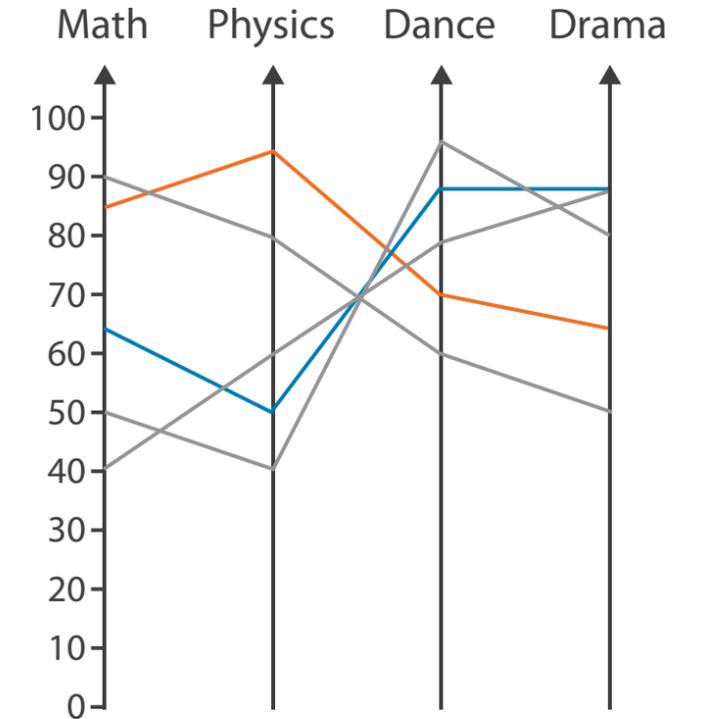


Table

Math	Physics	Dance	Drama
85	95	70	65
90	80	60	50
65	50	90	90
50	40	95	80
40	60	80	90

Task: Correlation

- scatterplot matrix
 - positive correlation
 - diagonal low-to-high
 - negative correlation
 - diagonal high-to-low
 - uncorrelated
- parallel coordinates
 - positive correlation
 - parallel line segments
 - negative correlation
 - all segments cross at halfway point
 - uncorrelated
 - scattered crossings

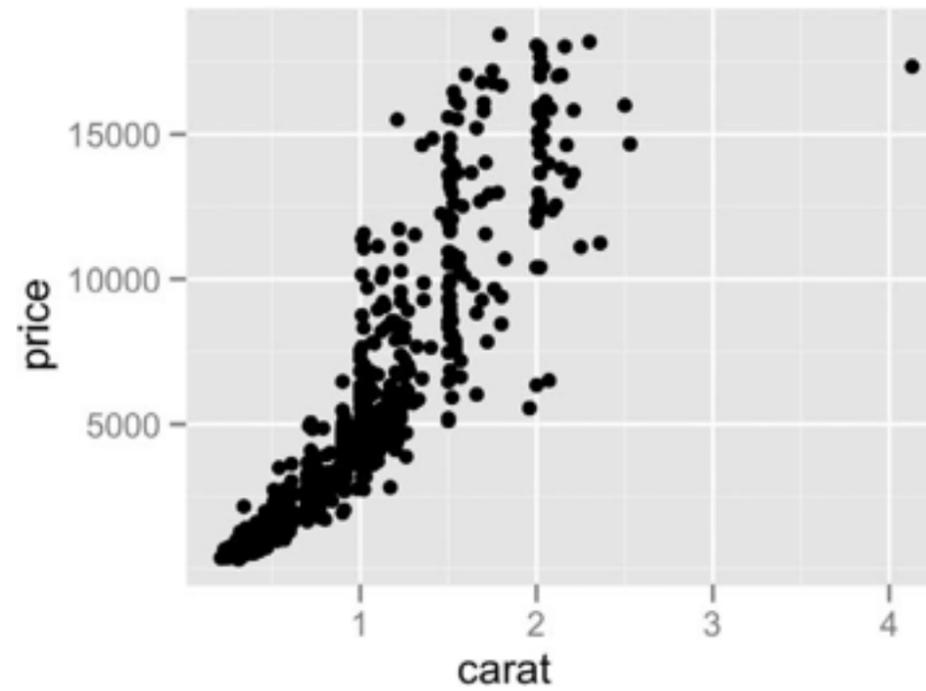

[A layered grammar of graphics. Wickham. *Journ. Computational and Graphical Statistics* 19:1 (2010), 3–28.]




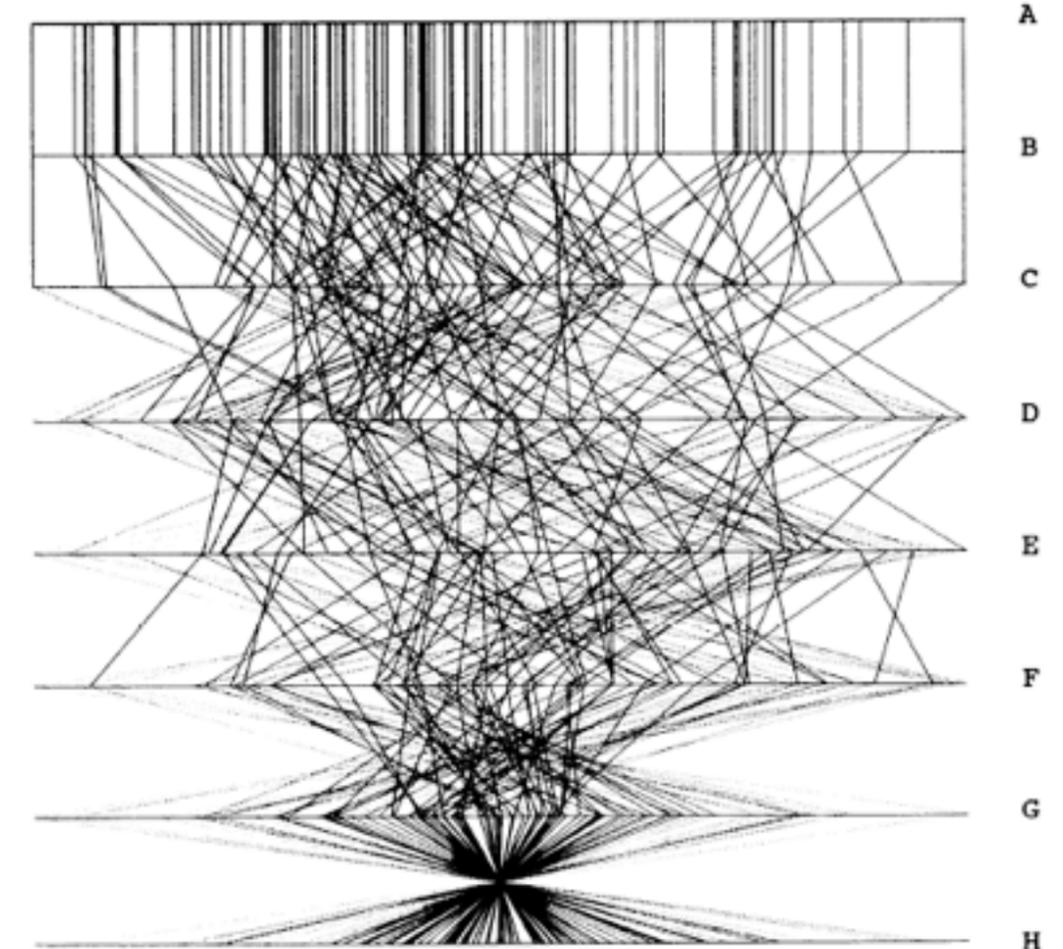


Figure 3. Parallel Coordinate Plot of Six-Dimensional Data Illustrating Correlations of $\rho = 1, .8, .2, 0, -.2, -.8, \text{ and } -1$.

[Hyperdimensional Data Analysis Using Parallel Coordinates. Wegman. *Journ. American Statistical Association* 85:411 (1990), 664–675.]




Idioms: radial bar chart, star plot

- radial bar chart
 - radial axes meet at central ring, line mark
- star plot
 - radial axes, meet at central point, line mark
- bar chart
 - rectilinear axes, aligned vertically
 - less accurate than aligned with radial

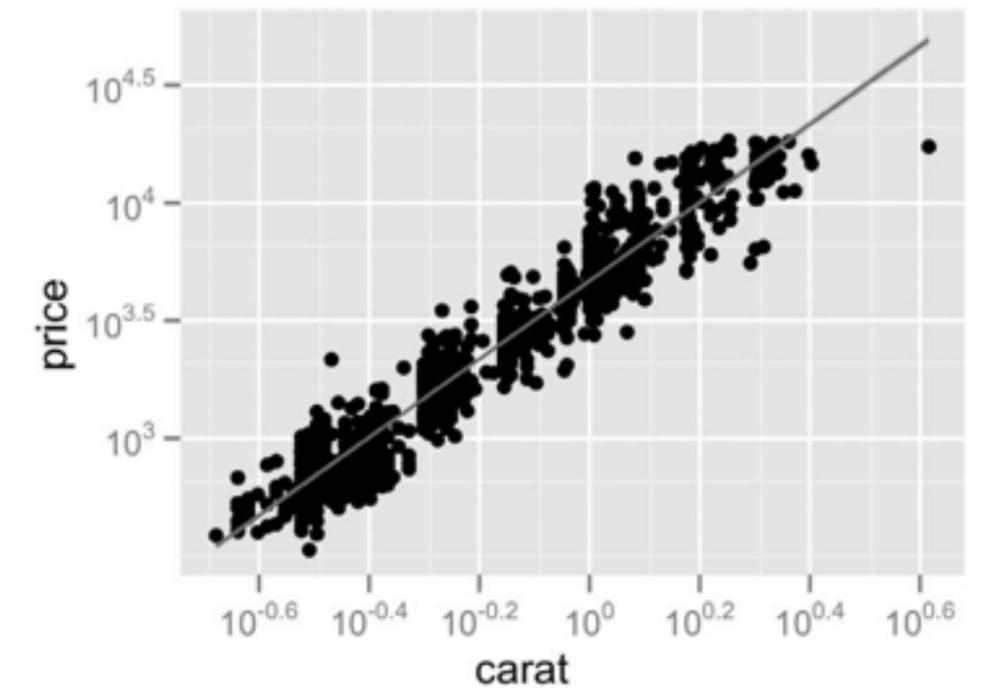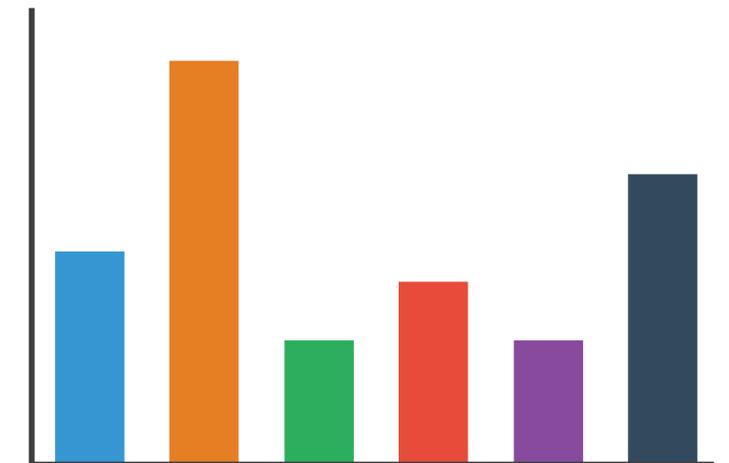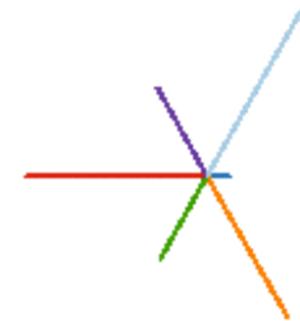




Idioms: pie chart, polar area chart

- pie chart
 - area marks with angle channel
 - accuracy: angle/area less accurate than line length
 - arclength also less accurate than line length
- polar area chart
 - area marks with length channel
 - more direct analog to bar charts
- data
 - I categ key attrib, I quant value attrib
- task
 - part-to-whole judgements

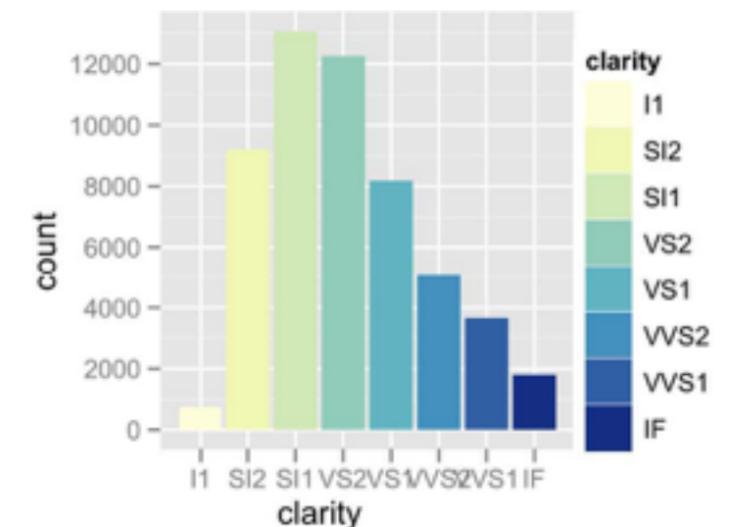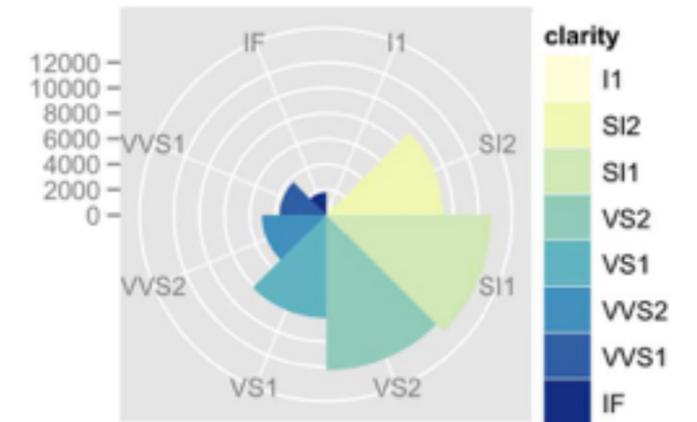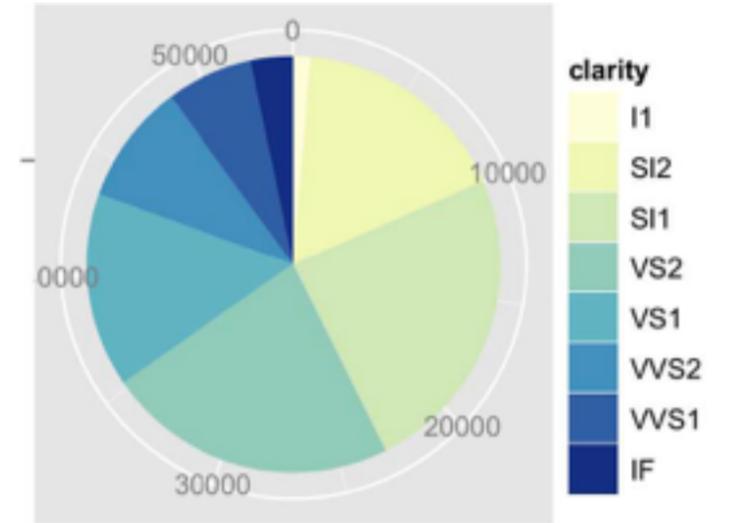

Idioms: **normalized stacked bar chart**

- task
 - part-to-whole judgements
- **normalized stacked bar chart**
 - stacked bar chart, normalized to full vert height
 - single stacked bar equivalent to full pie
 - high information density: requires narrow rectangle
- **pie chart**
 - information density: requires large circle

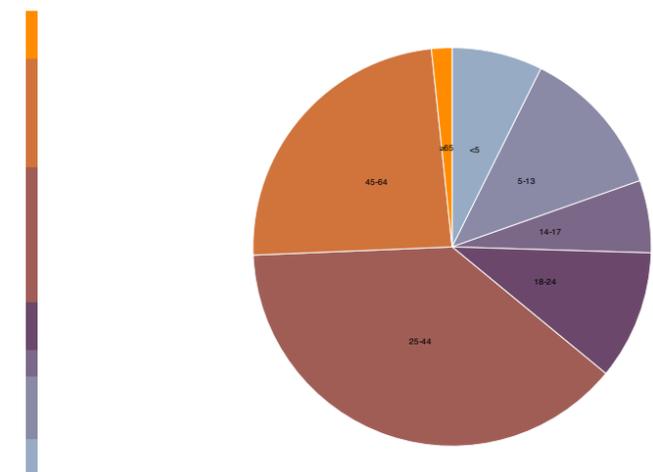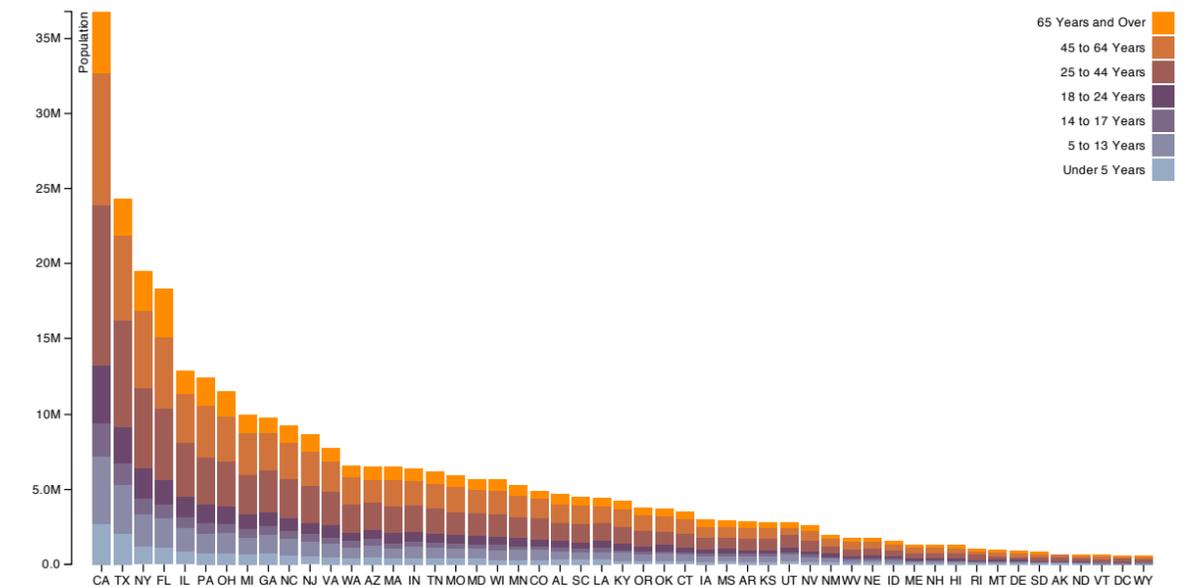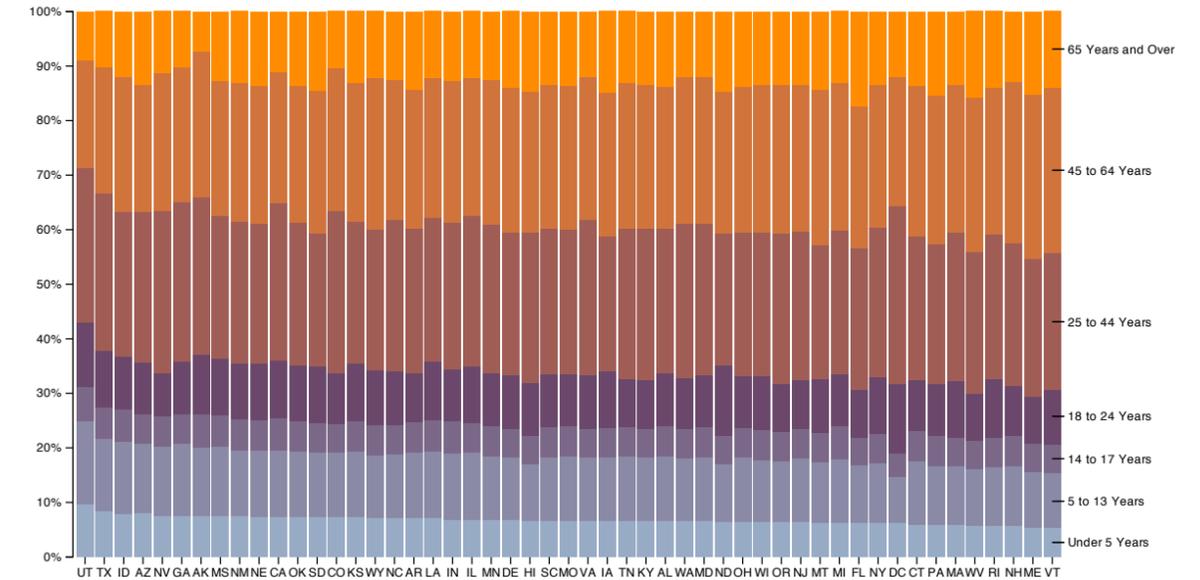

<http://bl.ocks.org/mbostock/3887235>,

<http://bl.ocks.org/mbostock/3886208>,


<http://bl.ocks.org/mbostock/3886394>.

Idiom: **glyphmaps**


- rectilinear good for linear vs nonlinear trends
- radial good for cyclic patterns

➔ Axis Orientation




➔ Rectilinear



➔ Parallel



➔ Radial

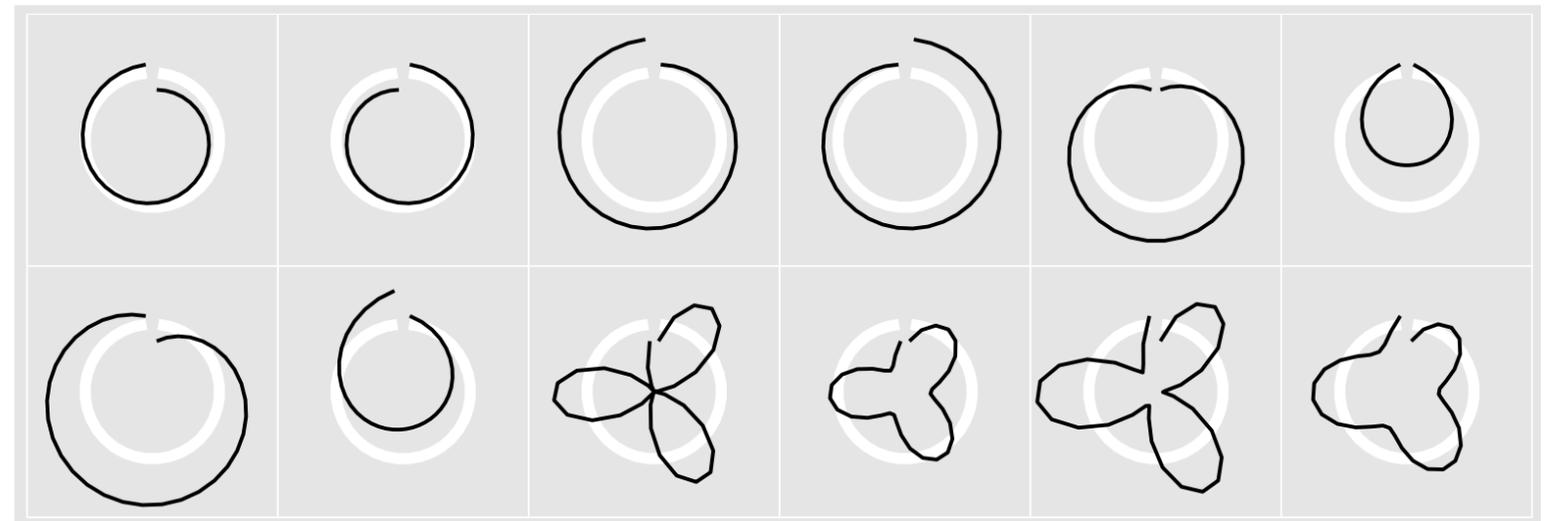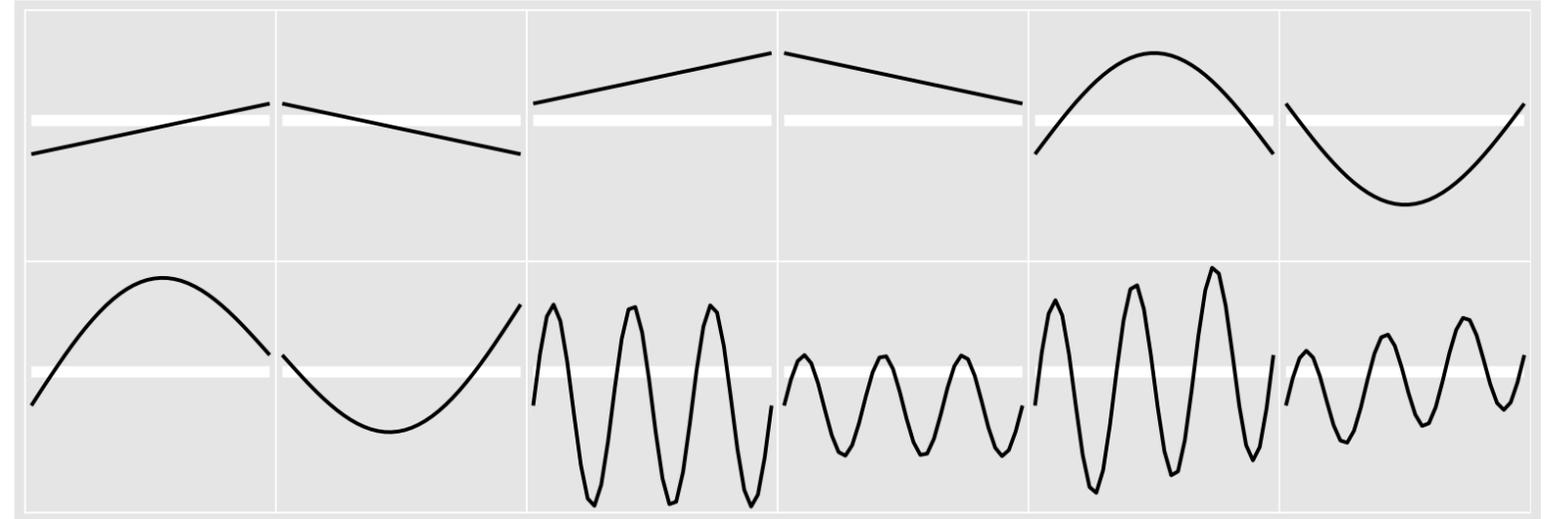

[Glyph-maps for Visually Exploring Temporal Patterns in Climate Data and Models. Wickham, Hofmann, Wickham, and Cook. *Environmetrics* 23:5 (2012), 382–393.]


Orientation limitations

- **rectilinear: scalability wrt #axes**
 - 2 axes best
 - 3 problematic
 - more in afternoon
 - 4+ impossible
- **parallel: unfamiliarity, training time**
- **radial: perceptual limits**
 - angles lower precision than lengths
 - asymmetry between angle and length
 - can be exploited!


[Uncovering Strengths and Weaknesses of Radial Visualizations - an Empirical Approach. Diehl, Beck and Burch. IEEE TVCG (Proc. InfoVis) 16(6):935–942, 2010.]

➔ **Axis Orientation**


➔ Rectilinear

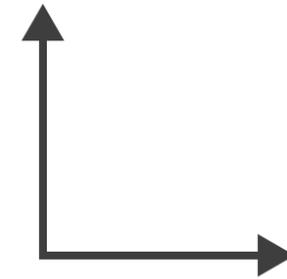

➔ Parallel

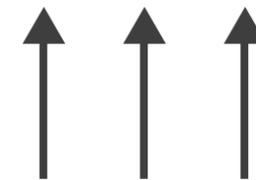


➔ Radial

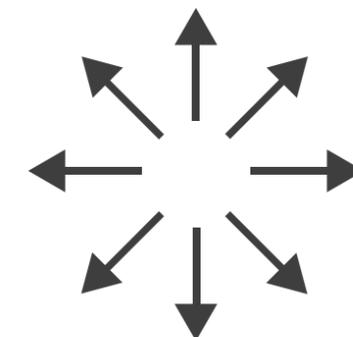


→ Layout Density

→ Dense

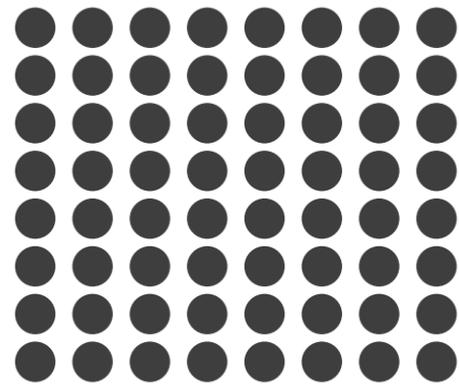

dense software overviews

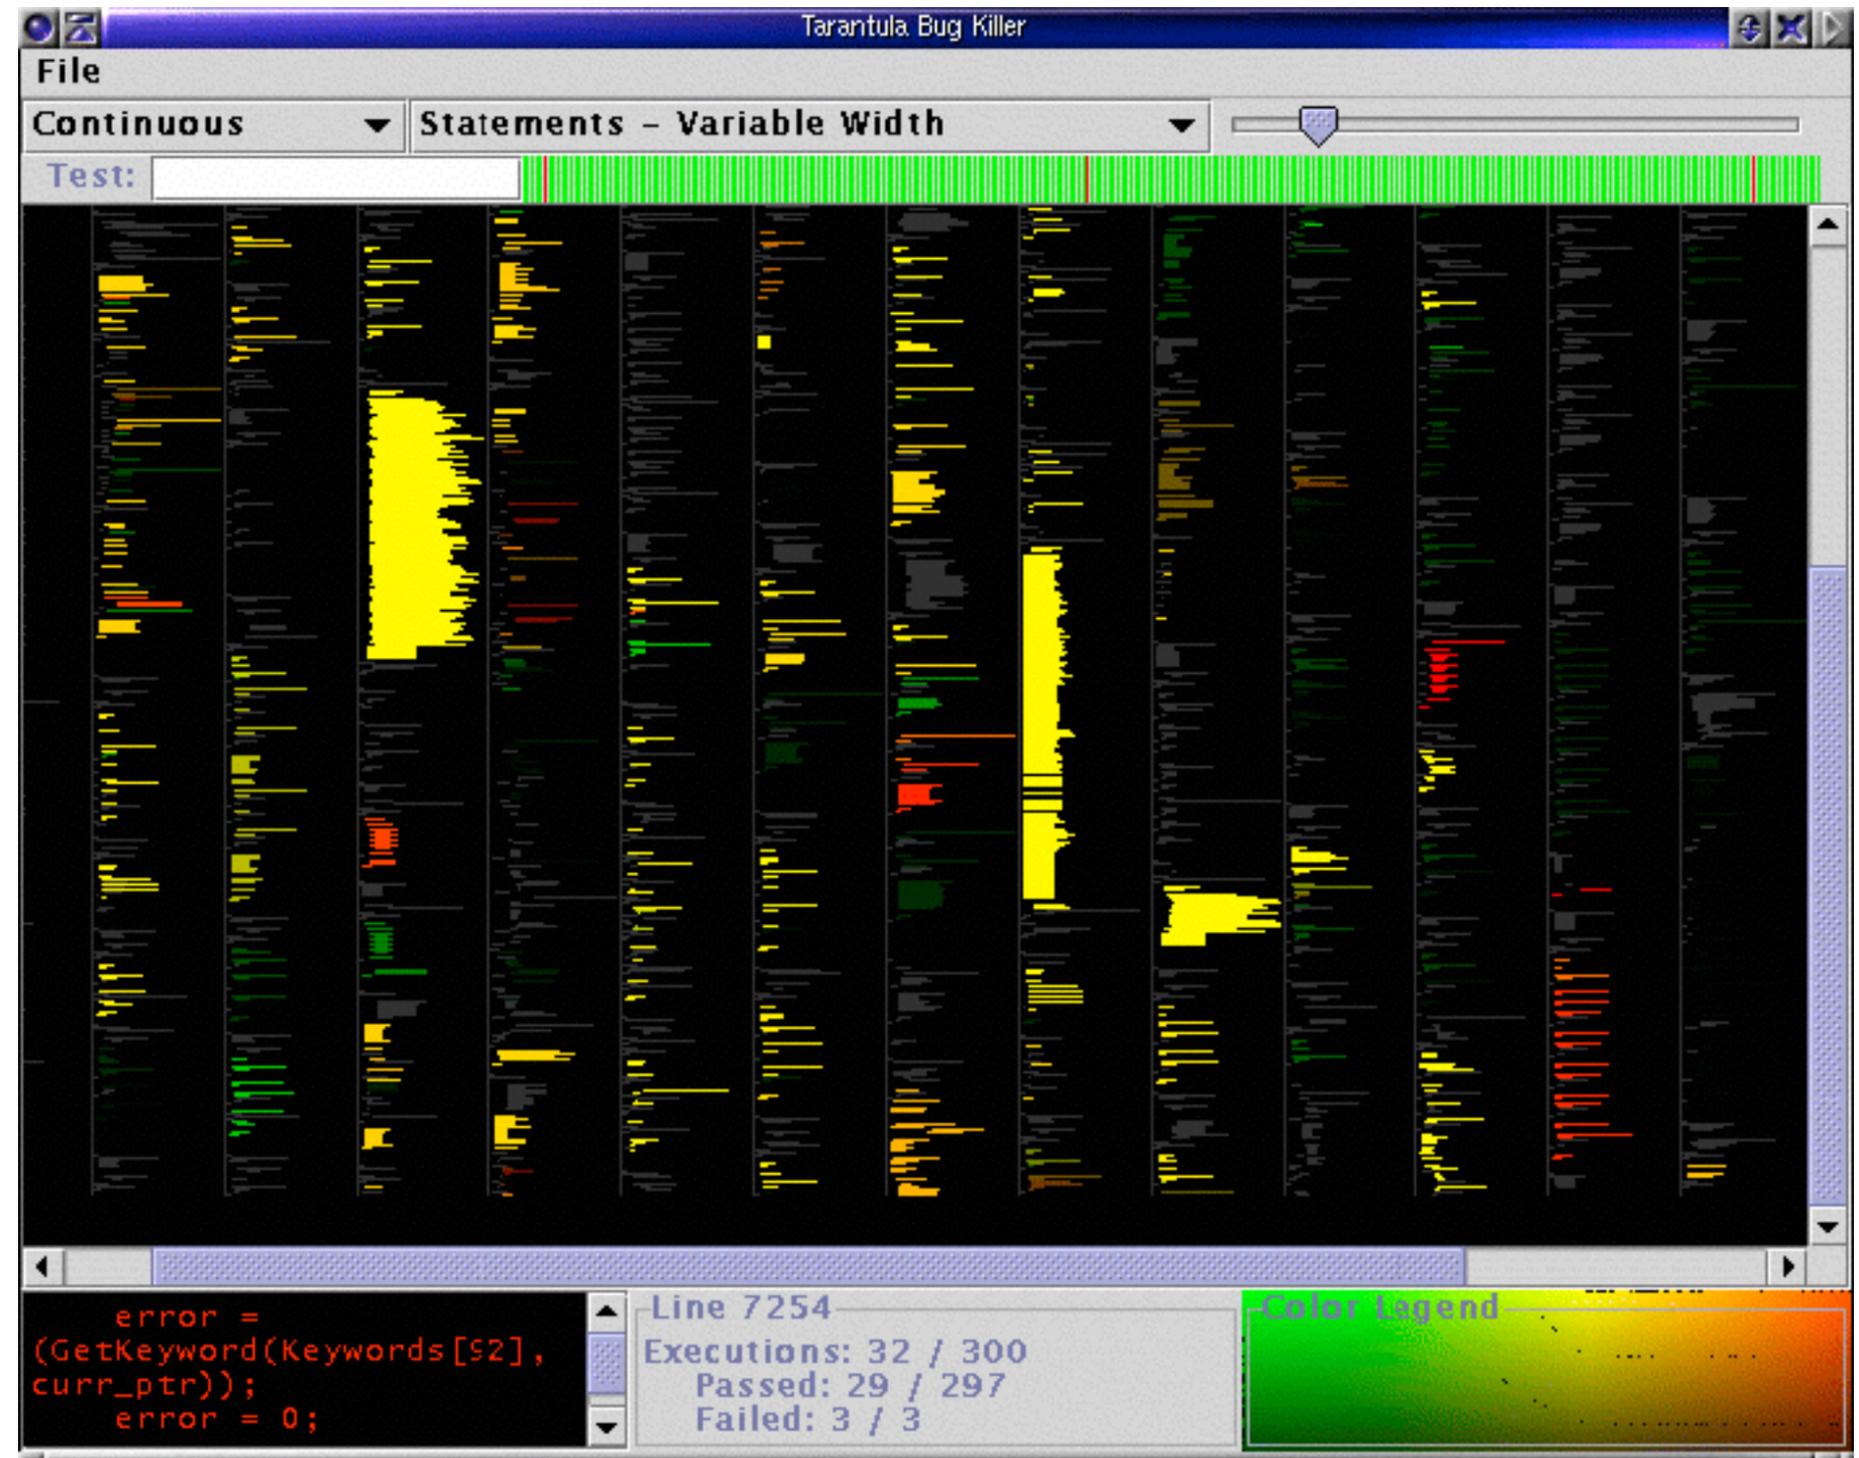

Further reading

- Visualization Analysis and Design. Munzner. AK Peters Visualization Series, CRC Press, 2014.
–*Chap 7: Arrange Tables*
- Visualizing Data. Cleveland. Hobart Press, 1993.
- *A Brief History of Data Visualization*. Friendly. 2008.
<http://www.datavis.ca/milestones>

Outline

- **Session 1 8:30-10:00am**
Visualization Analysis Framework
 - Introduction: Definitions
 - Analysis: What, Why, How
 - Marks and Channels
- **Session 2 10:30am-12:00pm**
Spatial Layout
 - Arrange Tables
 - **Arrange Spatial Data**
 - Arrange Networks and Trees
- **Session 3 1:00-2:30pm**
Color & Interaction
 - Map Color
 - Manipulate: Change, Select, Navigate
 - Facet: Juxtapose, Partition, Superimpose
- **Session 4 3:00-4:30pm**
Guidelines and Examples
 - Reduce: Filter, Aggregate
 - Rules of Thumb
 - Q&A

Arrange spatial data

→ Use Given

→ Geometry

→ *Geographic*

→ *Other Derived*

→ Spatial Fields

→ *Scalar Fields (one value per cell)*

→ *Isocontours*

→ *Direct Volume Rendering*



→ *Vector and Tensor Fields (many values per cell)*

→ *Flow Glyphs (local)*

→ *Geometric (sparse seeds)*


→ *Textures (dense seeds)*

→ *Features (globally derived)*

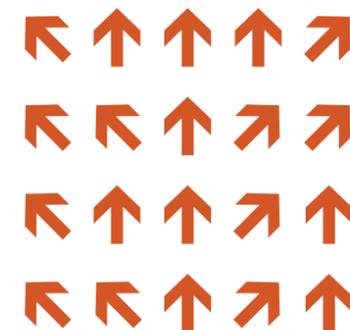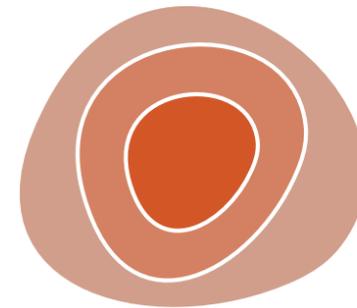

Idiom: **choropleth map**


- *use* given spatial data
 - when central task is understanding spatial relationships
- data
 - geographic geometry
 - table with 1 quant attribute per region
- encoding
 - use given geometry for area mark boundaries
 - sequential segmented colormap *[more later]*

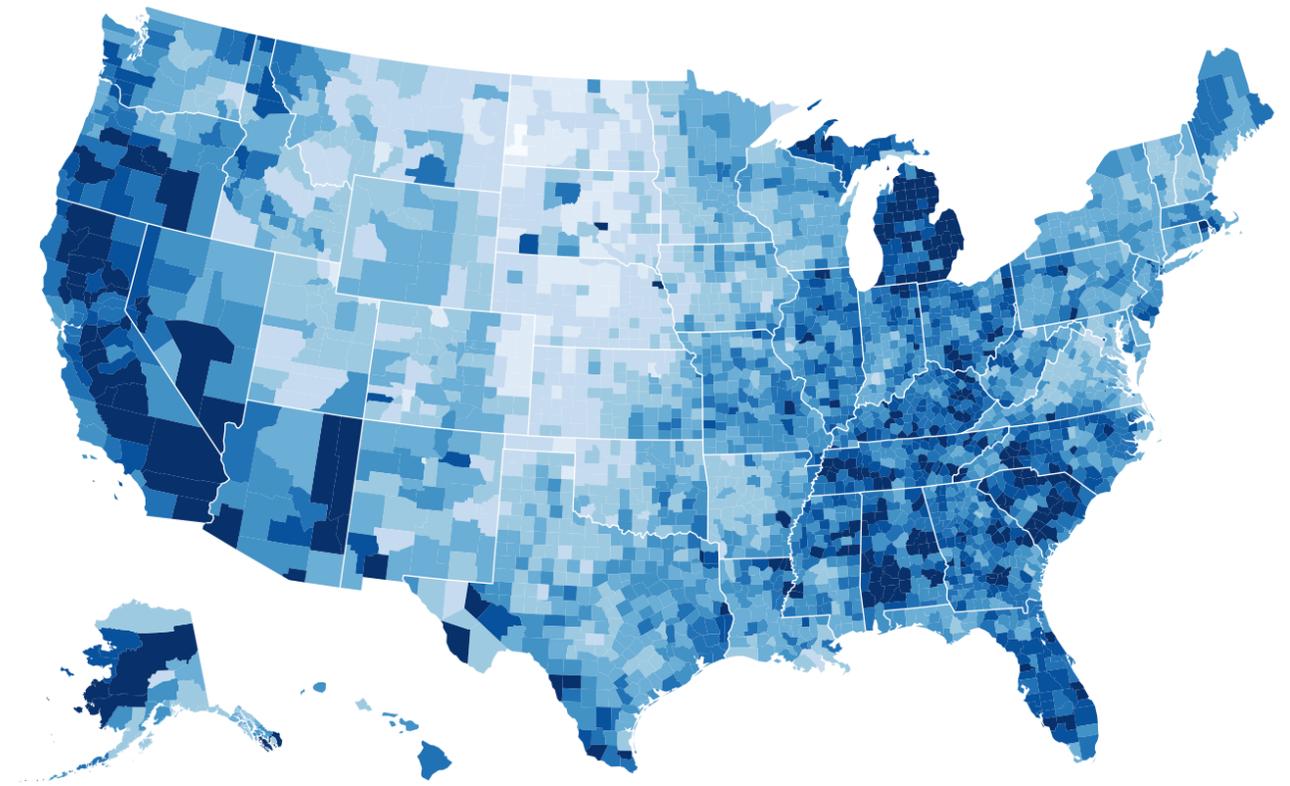

<http://bl.ocks.org/mbostock/4060606>

Beware: Population maps trickiness!


[<https://xkcd.com/1138>]

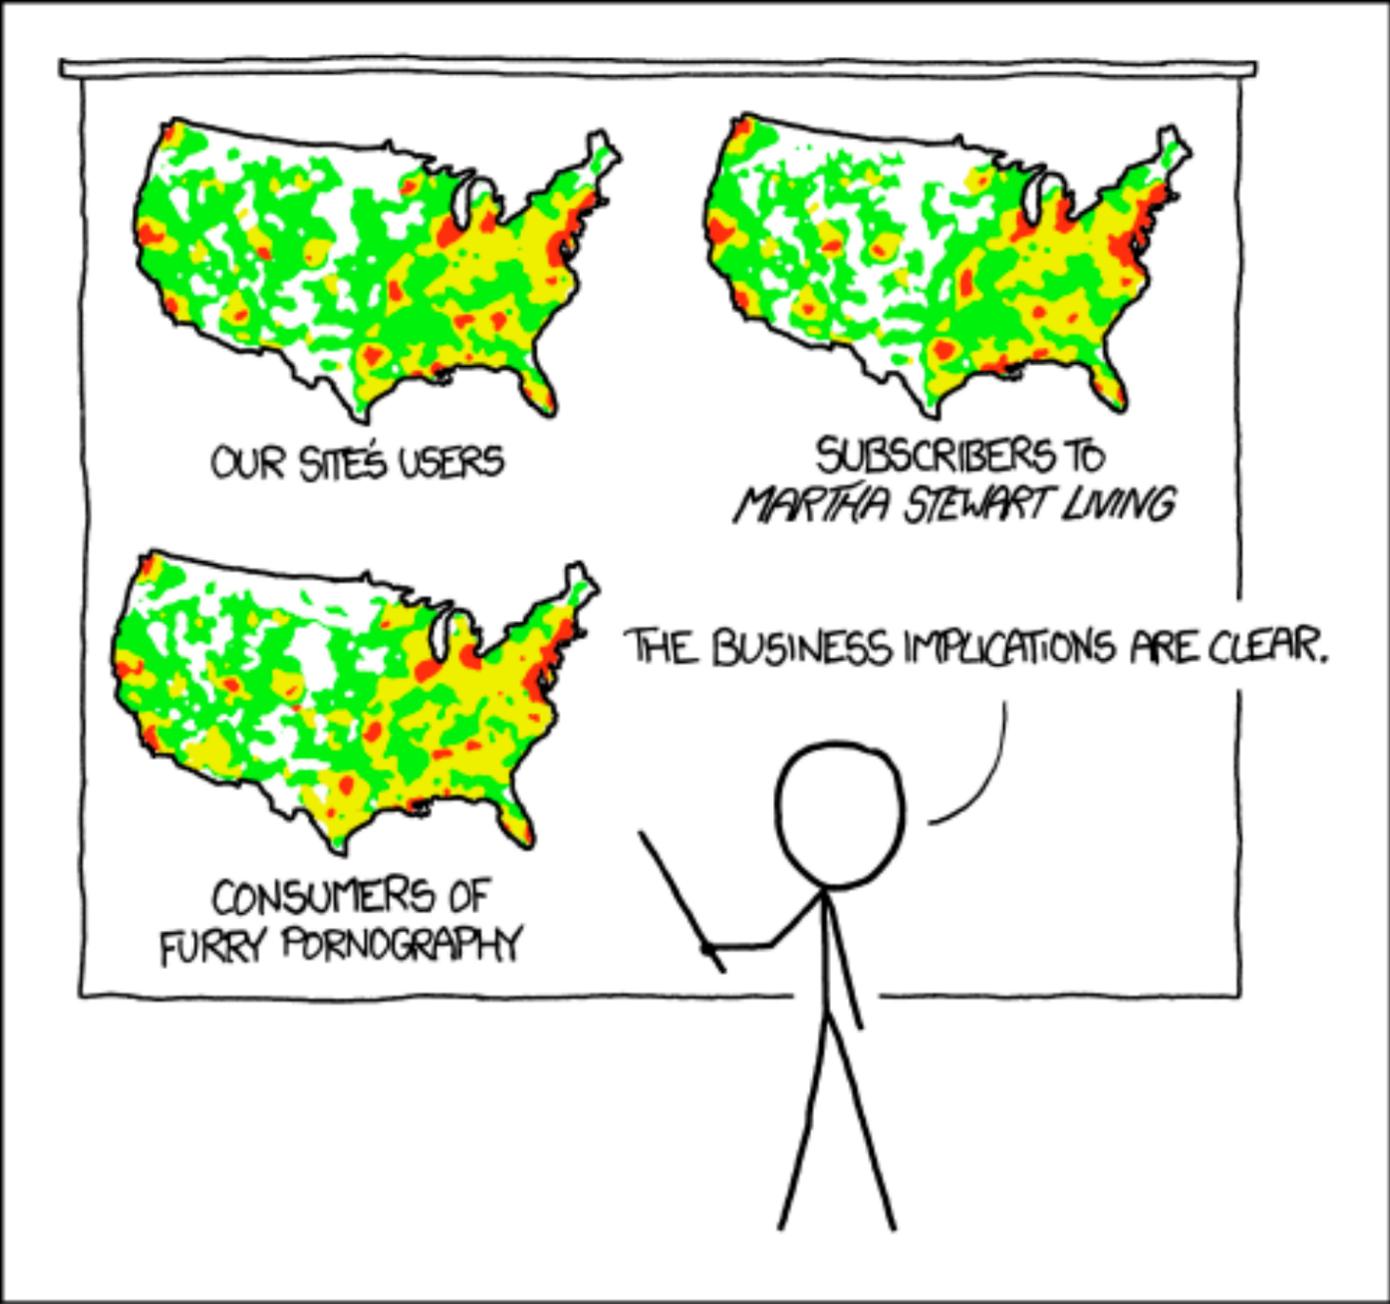

PET PEEVE #208:
GEOGRAPHIC PROFILE MAPS WHICH ARE
BASICALLY JUST POPULATION MAPS

Idiom: **topographic map**


- data
 - geographic geometry
 - scalar spatial field
 - 1 quant attribute per grid cell
- derived data
 - isoline geometry
 - isocontours computed for specific levels of scalar values

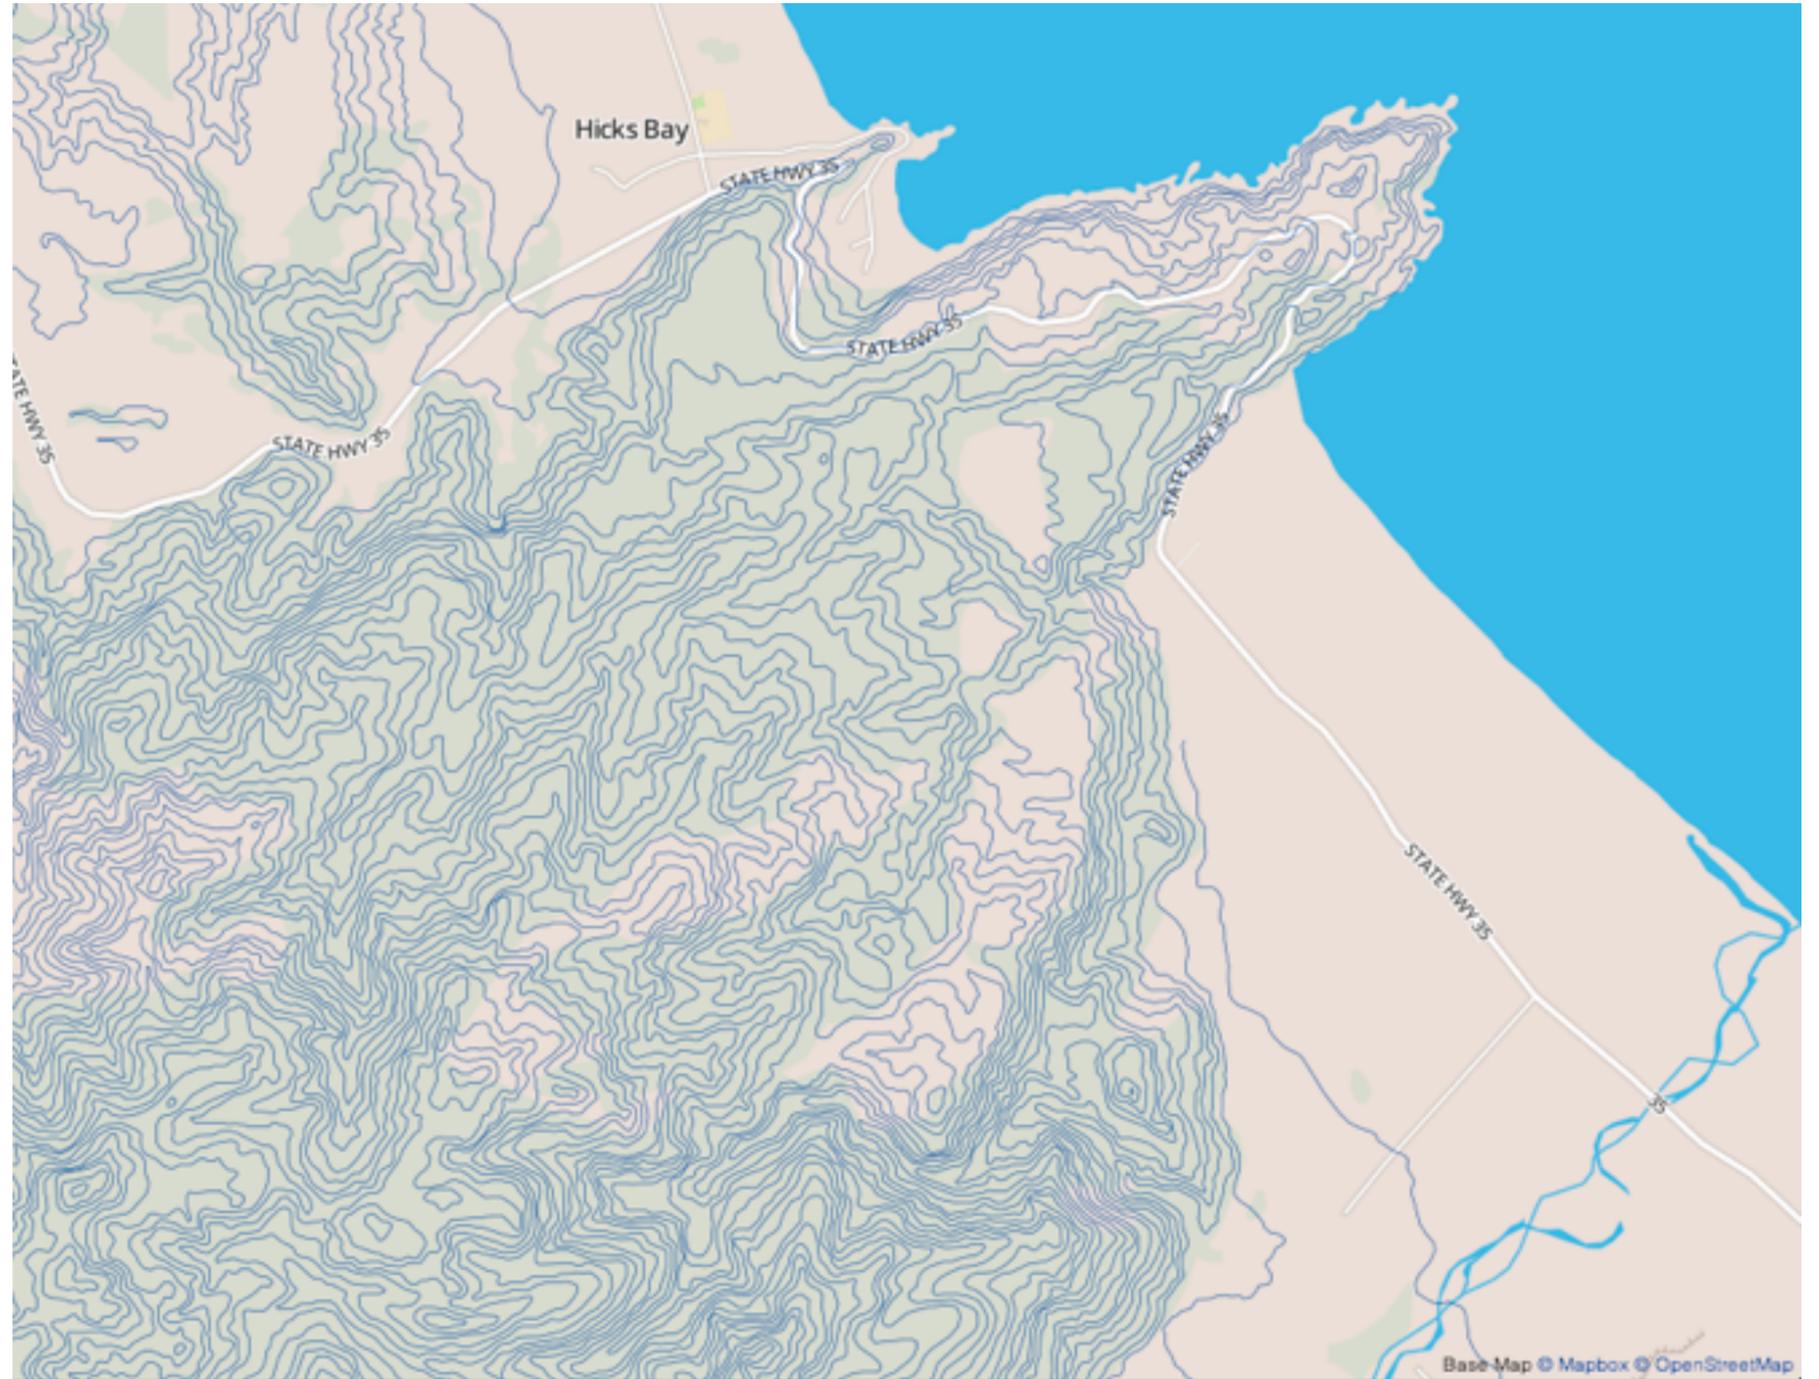


Land Information New Zealand Data Service

Idioms: **isosurfaces**, **direct volume rendering**

- data
 - scalar spatial field
 - 1 quant attribute per grid cell
- task
 - shape understanding, spatial relationships
- isosurface
 - derived data: isocontours computed for specific levels of scalar values
- direct volume rendering
 - transfer function maps scalar values to color, opacity

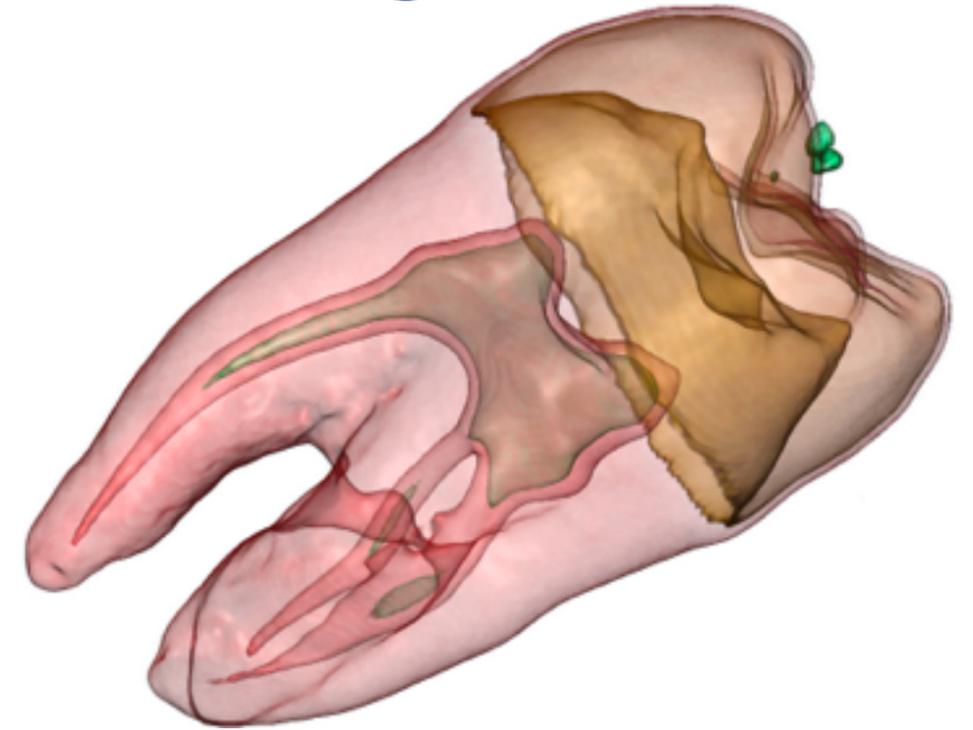


[Interactive Volume Rendering Techniques. Kniss. Master's thesis, University of Utah Computer Science, 2002.]

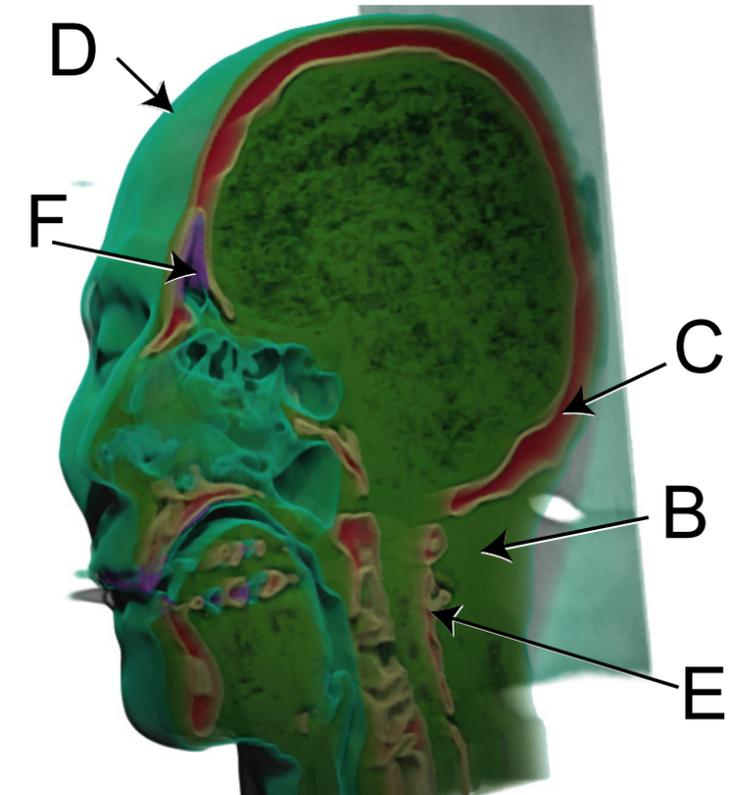


[Multidimensional Transfer Functions for Volume Rendering. Kniss, Kindlmann, and Hansen. In *The Visualization Handbook*, edited by Charles Hansen and Christopher Johnson, pp. 189–210. Elsevier, 2005.]

Vector and tensor fields

- data
 - many attribs per cell
- idiom families
 - flow glyphs
 - purely local
 - geometric flow
 - derived data from tracing particle trajectories
 - sparse set of seed points
 - texture flow
 - derived data, dense seeds
 - feature flow
 - global computation to detect features
 - encoded with one of methods above

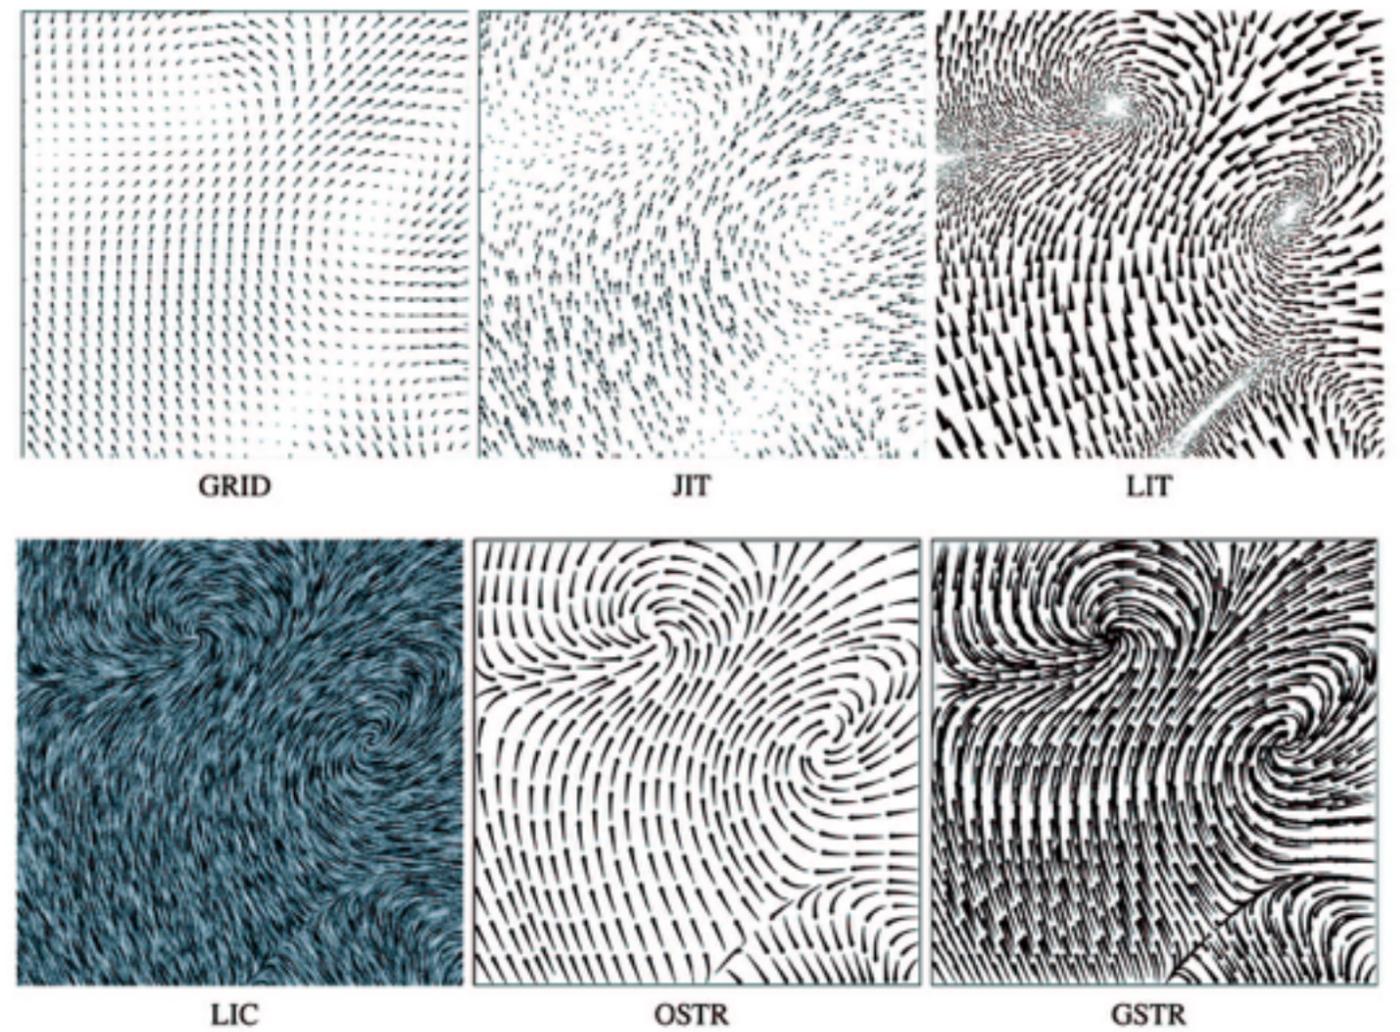


[Comparing 2D vector field visualization methods: A user study. Laidlaw et al. IEEE Trans. Visualization and Computer Graphics (TVCG) 11:1 (2005), 59–70.]

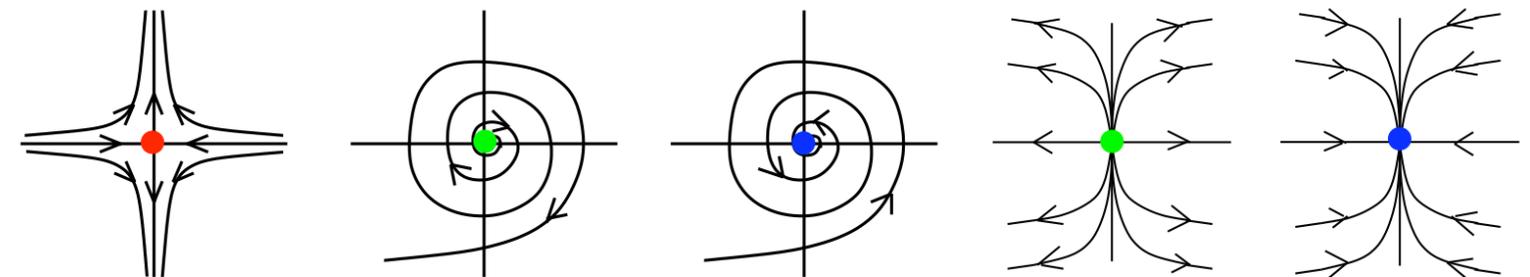


[Topology tracking for the visualization of time-dependent two-dimensional flows. Tricoche, Wischgoll, Scheuermann, and Hagen. Computers & Graphics 26:2 (2002), 249–257.]

Vector fields

- empirical study tasks
 - finding critical points, identifying their types
 - identifying what type of critical point is at a specific location
 - predicting where a particle starting at a specified point will end up (advection)

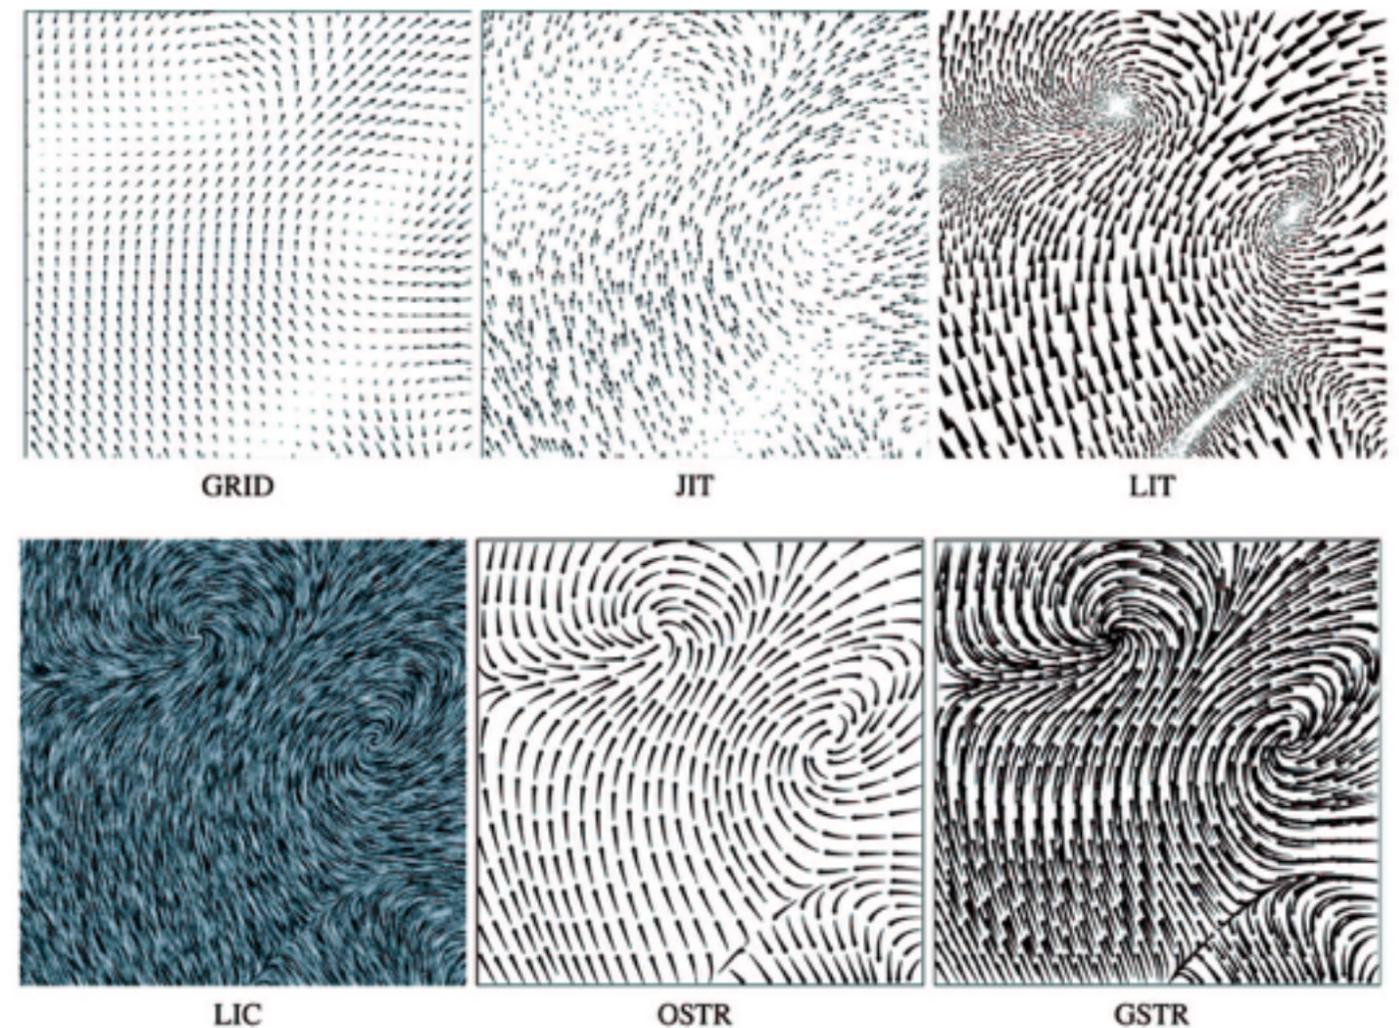


[Comparing 2D vector field visualization methods: A user study. Laidlaw et al. *IEEE Trans. Visualization and Computer Graphics (TVCG)* 11:1 (2005), 59–70.]

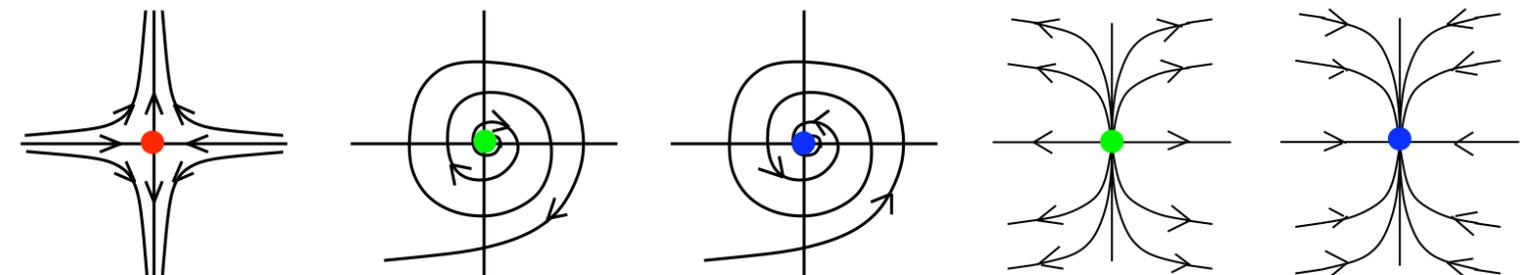

[Topology tracking for the visualization of time-dependent two-dimensional flows. Tricoche, Wischgoll, Scheuermann, and Hagen. *Computers & Graphics* 26:2 (2002), 249–257.]

Idiom: **similarity-clustered streamlines**

- data
 - 3D vector field
- derived data (from field)
 - streamlines: trajectory particle will follow
- derived data (per streamline)
 - curvature, torsion, tortuosity
 - signature: complex weighted combination
 - compute cluster hierarchy across all signatures
 - encode: color and opacity by cluster
- tasks
 - find features, query shape
- scalability
 - millions of samples, hundreds of streamlines

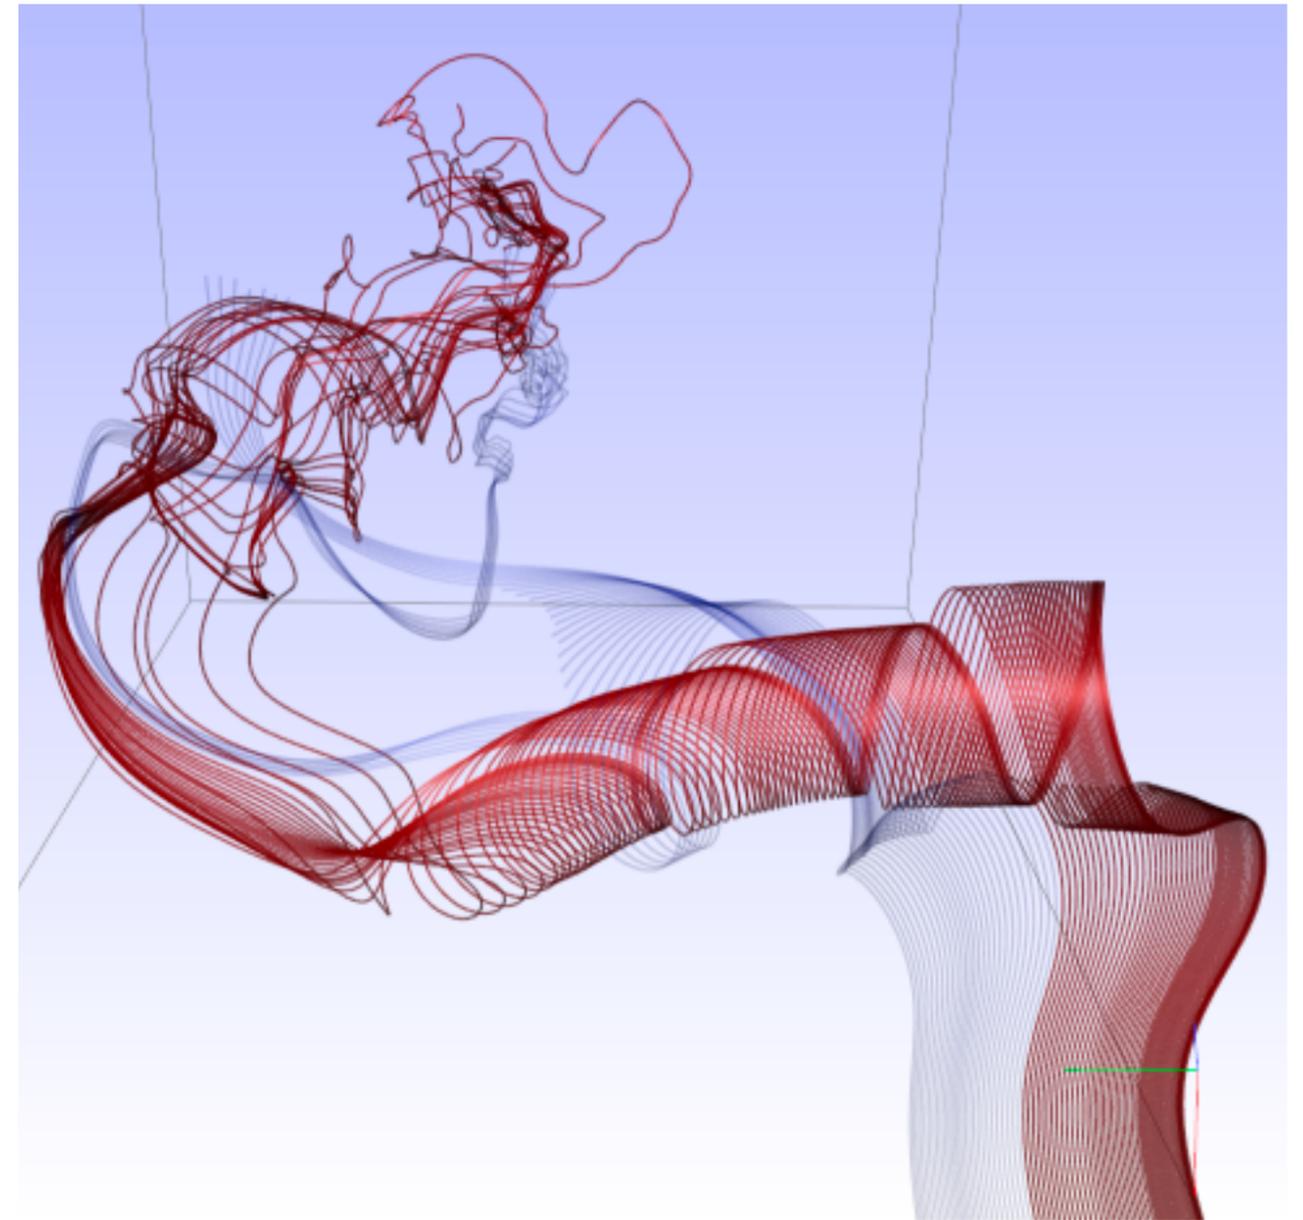

[Similarity Measures for Enhancing Interactive Streamline Seeding. McLoughlin, Jones, Laramee, Malki, Masters, and Hansen. IEEE Trans. Visualization and Computer Graphics 19:8 (2013), 1342–1353.]

Further reading

- Visualization Analysis and Design. Munzner. AK Peters Visualization Series, CRC Press, 2014.
–*Chap 8: Arrange Spatial Data*
- How Maps Work: Representation, Visualization, and Design. MacEachren. Guilford Press, 1995.
- Overview of visualization. Schroeder and. Martin. In The Visualization Handbook, edited by Charles Hansen and Christopher Johnson, pp. 3–39. Elsevier, 2005.
- Real-Time Volume Graphics. Engel, Hadwiger, Kniss, Reza-Salama, and Weiskopf. AK Peters, 2006.
- Overview of flow visualization. Weiskopf and Erlebacher. In The Visualization Handbook, edited by Charles Hansen and Christopher Johnson, pp. 261–278. Elsevier, 2005.

Outline


- **Session 1 8:30-10:00am**
Visualization Analysis Framework
 - Introduction: Definitions
 - Analysis: What, Why, How
 - Marks and Channels
- **Session 2 10:30am-12:00pm**
Spatial Layout
 - Arrange Tables
 - Arrange Spatial Data
 - **Arrange Networks and Trees**
- **Session 3 1:00-2:30pm**
Color & Interaction
 - Map Color
 - Manipulate: Change, Select, Navigate
 - Facet: Juxtapose, Partition, Superimpose
- **Session 4 3:00-4:30pm**
Guidelines and Examples
 - Reduce: Filter, Aggregate
 - Rules of Thumb
 - Q&A

Arrange networks and trees

→ Node–Link Diagrams Connection Marks

✓ NETWORKS


✓ TREES

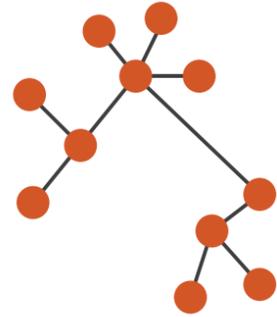

→ Adjacency Matrix Derived Table

✓ NETWORKS


✓ TREES

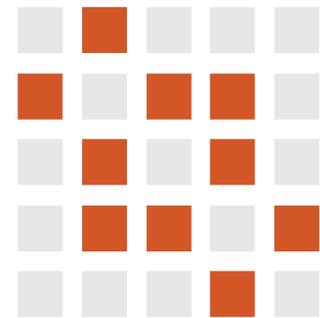

→ Enclosure Containment Marks


✗ NETWORKS

✓ TREES

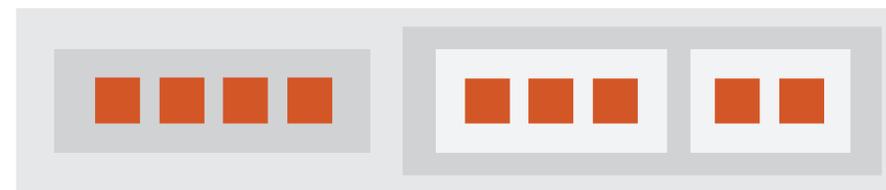


Idiom: **force-directed placement**

- visual encoding
 - link connection marks, node point marks
- considerations
 - spatial position: no meaning directly encoded
 - left free to minimize crossings
 - proximity semantics?
 - sometimes meaningful
 - sometimes arbitrary, artifact of layout algorithm
 - tension with length
 - long edges more visually salient than short
- tasks
 - explore topology; locate paths, clusters
- scalability
 - node/edge density $E < 4N$

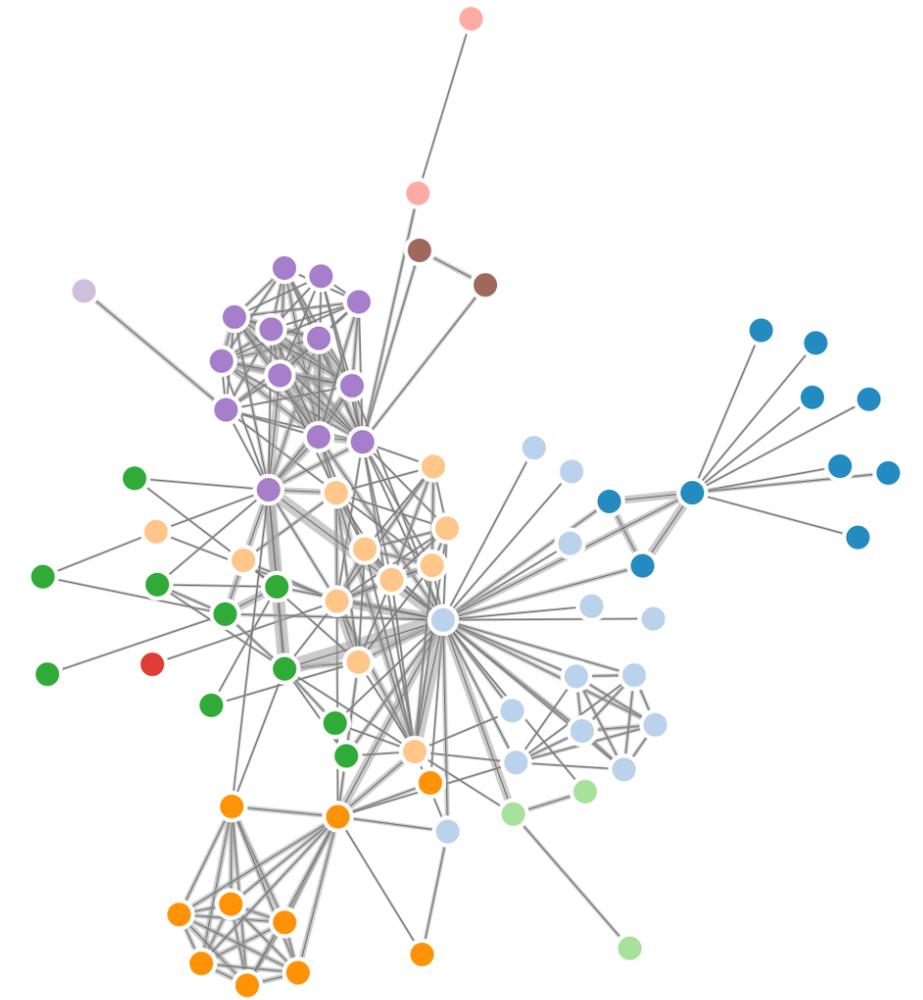


Idiom: **sfdp** (multi-level force-directed placement)

- data
 - original: network
 - derived: cluster hierarchy atop it
- considerations
 - better algorithm for same encoding technique
 - same: fundamental use of space
 - hierarchy used for algorithm speed/quality but not shown explicitly
 - (more on algorithm vs encoding in afternoon)
- scalability
 - nodes, edges: 1K-10K
 - hairball problem eventually hits

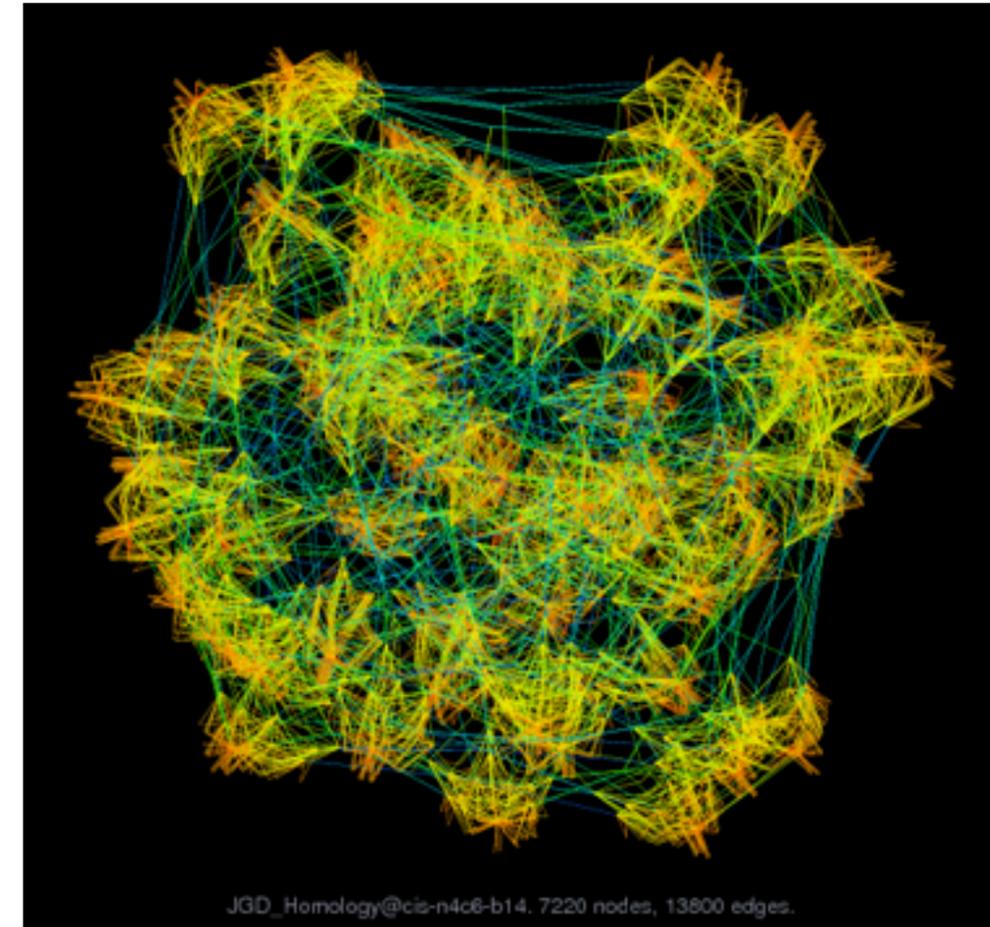


[Efficient and high quality force-directed graph drawing. Hu. The Mathematica Journal 10:37–71, 2005.]

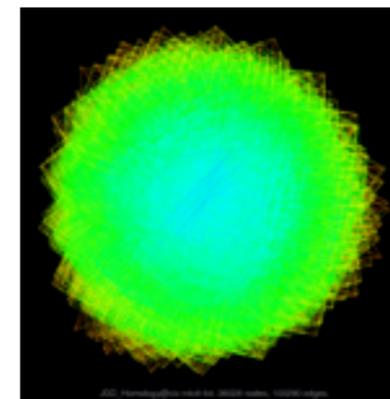


<http://www.research.att.com/yifanhu/GALLERY/GRAPHS/index1.html>

Idiom: adjacency matrix view

- data: network
 - transform into same data/encoding as heatmap
- derived data: table from network
 - 1 quant attrib
 - weighted edge between nodes
 - 2 categ attribs: node list x 2
- visual encoding
 - cell shows presence/absence of edge
- scalability
 - 1K nodes, 1M edges

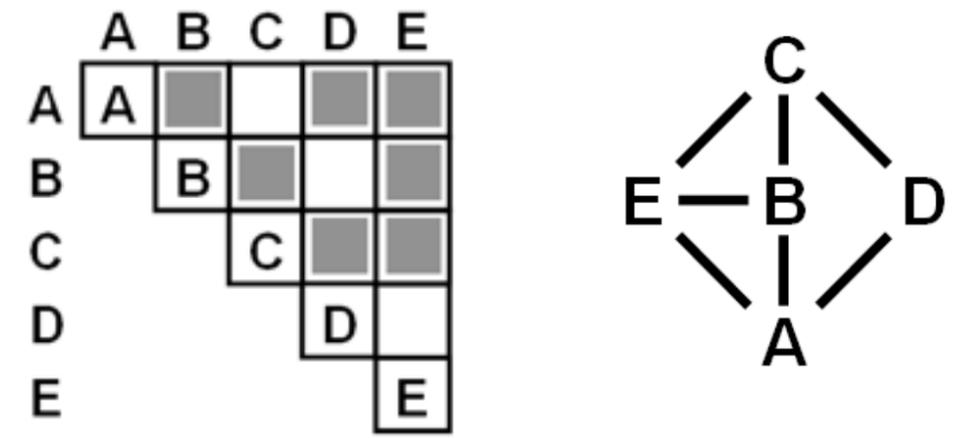


[NodeTrix: a Hybrid Visualization of Social Networks. Henry, Fekete, and McGuffin. IEEE TVCG (Proc. InfoVis) 13(6):1302-1309, 2007.]

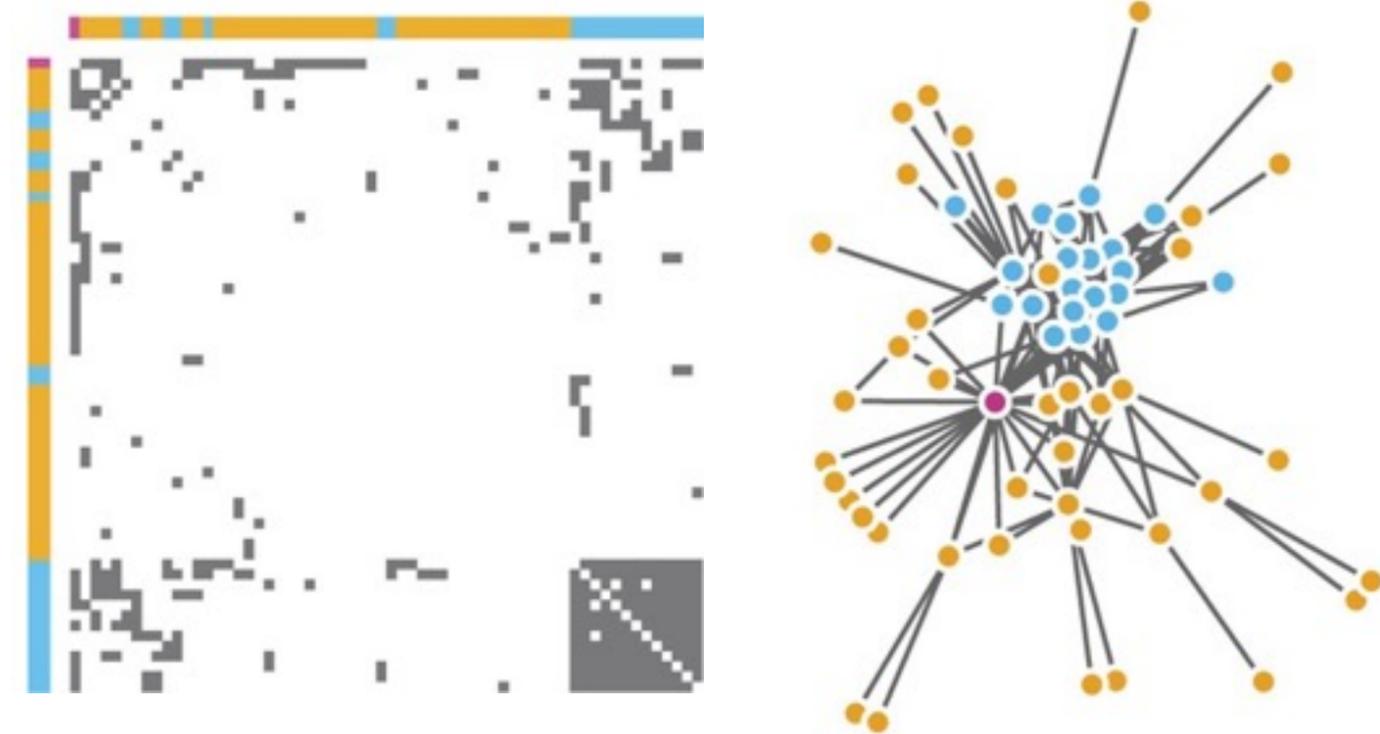

[Points of view: Networks. Gehlenborg and Wong. Nature Methods 9:115.]

Connection vs. adjacency comparison

- adjacency matrix strengths
 - predictability, scalability, supports reordering
 - some topology tasks trainable
- node-link diagram strengths
 - topology understanding, path tracing
 - intuitive, no training needed
- empirical study
 - node-link best for small networks
 - matrix best for large networks
 - if tasks don't involve topological structure!

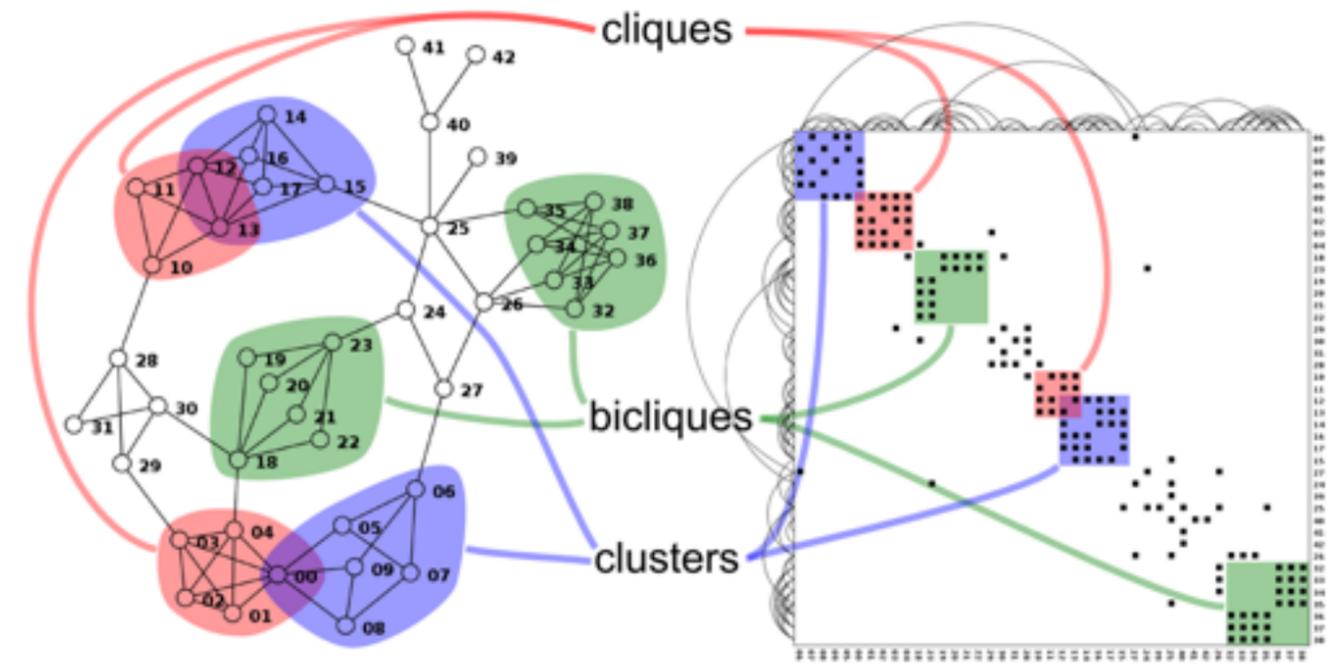


<http://www.michaelmcguffin.com/courses/vis/patternsInAdjacencyMatrix.png>

[On the readability of graphs using node-link and matrix-based representations: a controlled experiment and statistical analysis. Ghoniem, Fekete, and Castagliola. Information Visualization 4:2 (2005), 114–135.]

Idiom: radial node-link tree

- data
 - tree
- encoding
 - link connection marks
 - point node marks
 - radial axis orientation
 - angular proximity: siblings
 - distance from center: depth in tree
- tasks
 - understanding topology, following paths
- scalability
 - 1K - 10K nodes

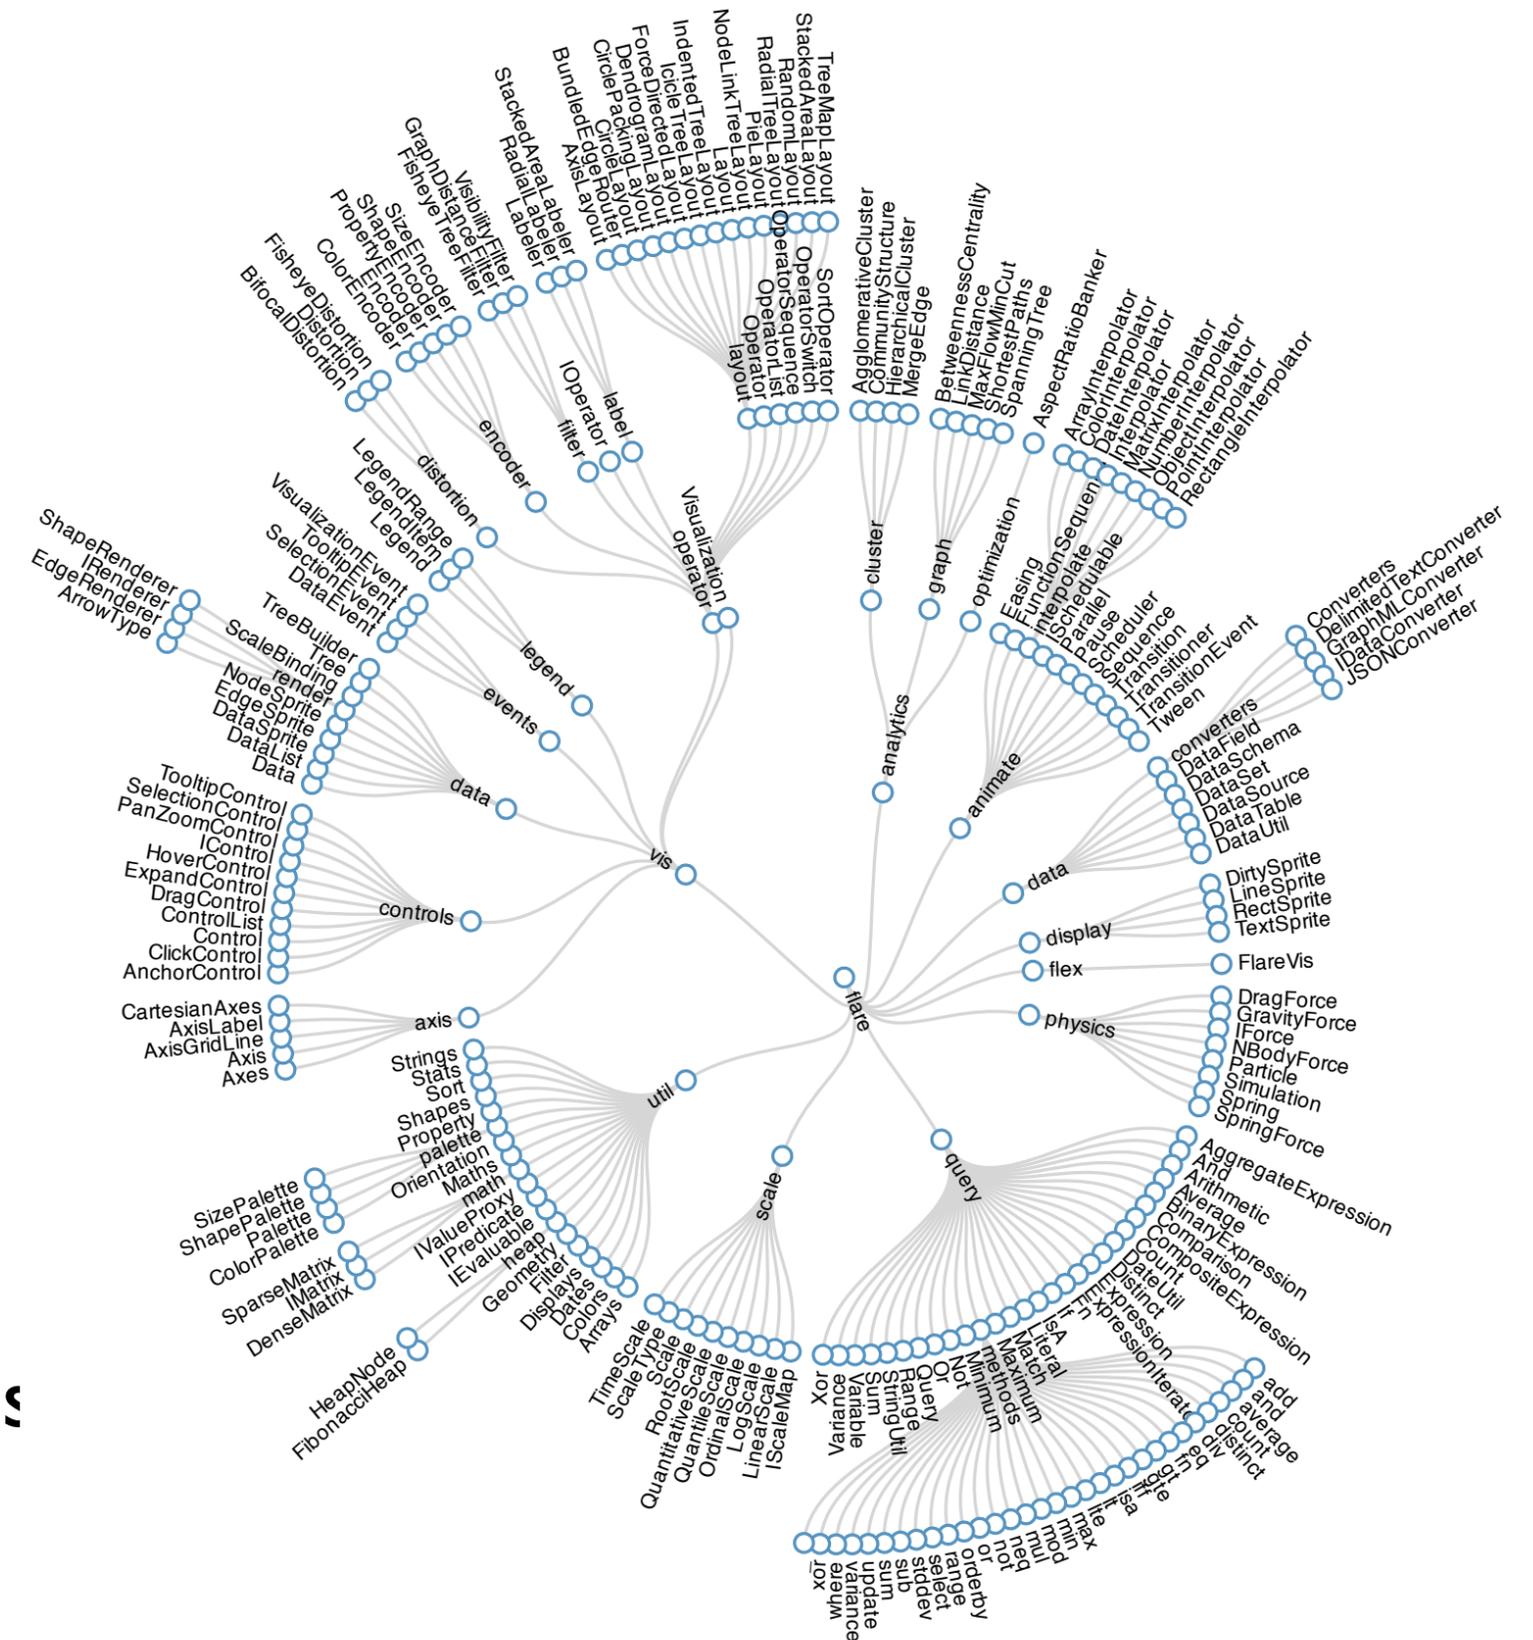

Idiom: **treemap**

- data
 - tree
 - 1 quant attrib at leaf nodes
- encoding
 - area containment marks for hierarchical structure
 - rectilinear orientation
 - size encodes quant attrib
- tasks
 - query attribute at leaf nodes
- scalability
 - 1M leaf nodes





http://tulip.labri.fr/Documentation/3_7/userHandbook/html/ch06.html




Link marks: Connection and containment

- marks as links (vs. nodes)
 - common case in network drawing
 - 1D case: connection
 - ex: all node-link diagrams
 - emphasizes topology, path tracing
 - networks and trees
 - 2D case: containment
 - ex: all treemap variants
 - emphasizes attribute values at leaves (size coding)
 - only trees


➔ Connection

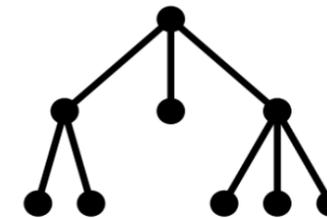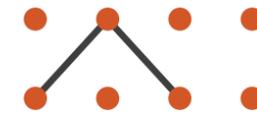

➔ Containment

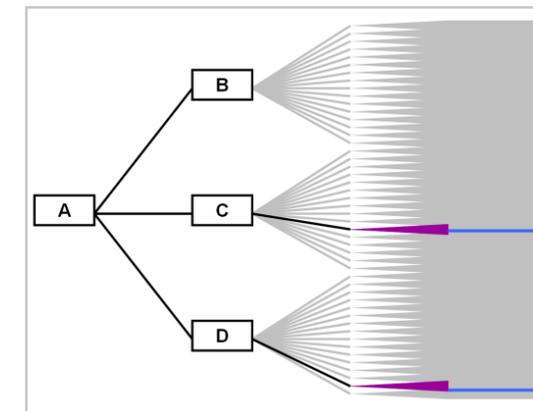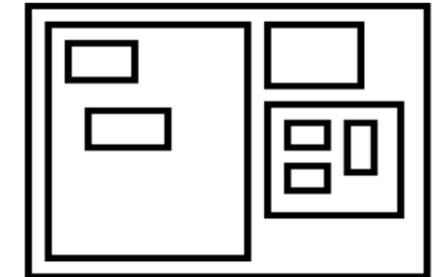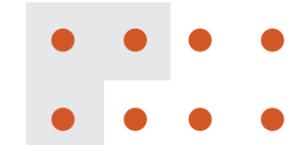

Node-Link Diagram

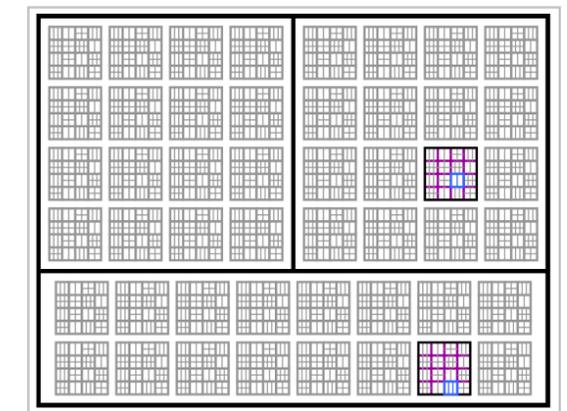


Treemap

[Elastic Hierarchies: Combining Treemaps and Node-Link Diagrams. Dong, McGuffin, and Chignell. Proc. InfoVis 2005, p. 57-64.]

Tree drawing idioms comparison

- data shown
 - link relationships
 - tree depth
 - sibling order
- design choices
 - connection vs containment link marks
 - rectilinear vs radial layout
 - spatial position channels
- considerations
 - redundant? arbitrary?
 - information density?
 - avoid wasting space

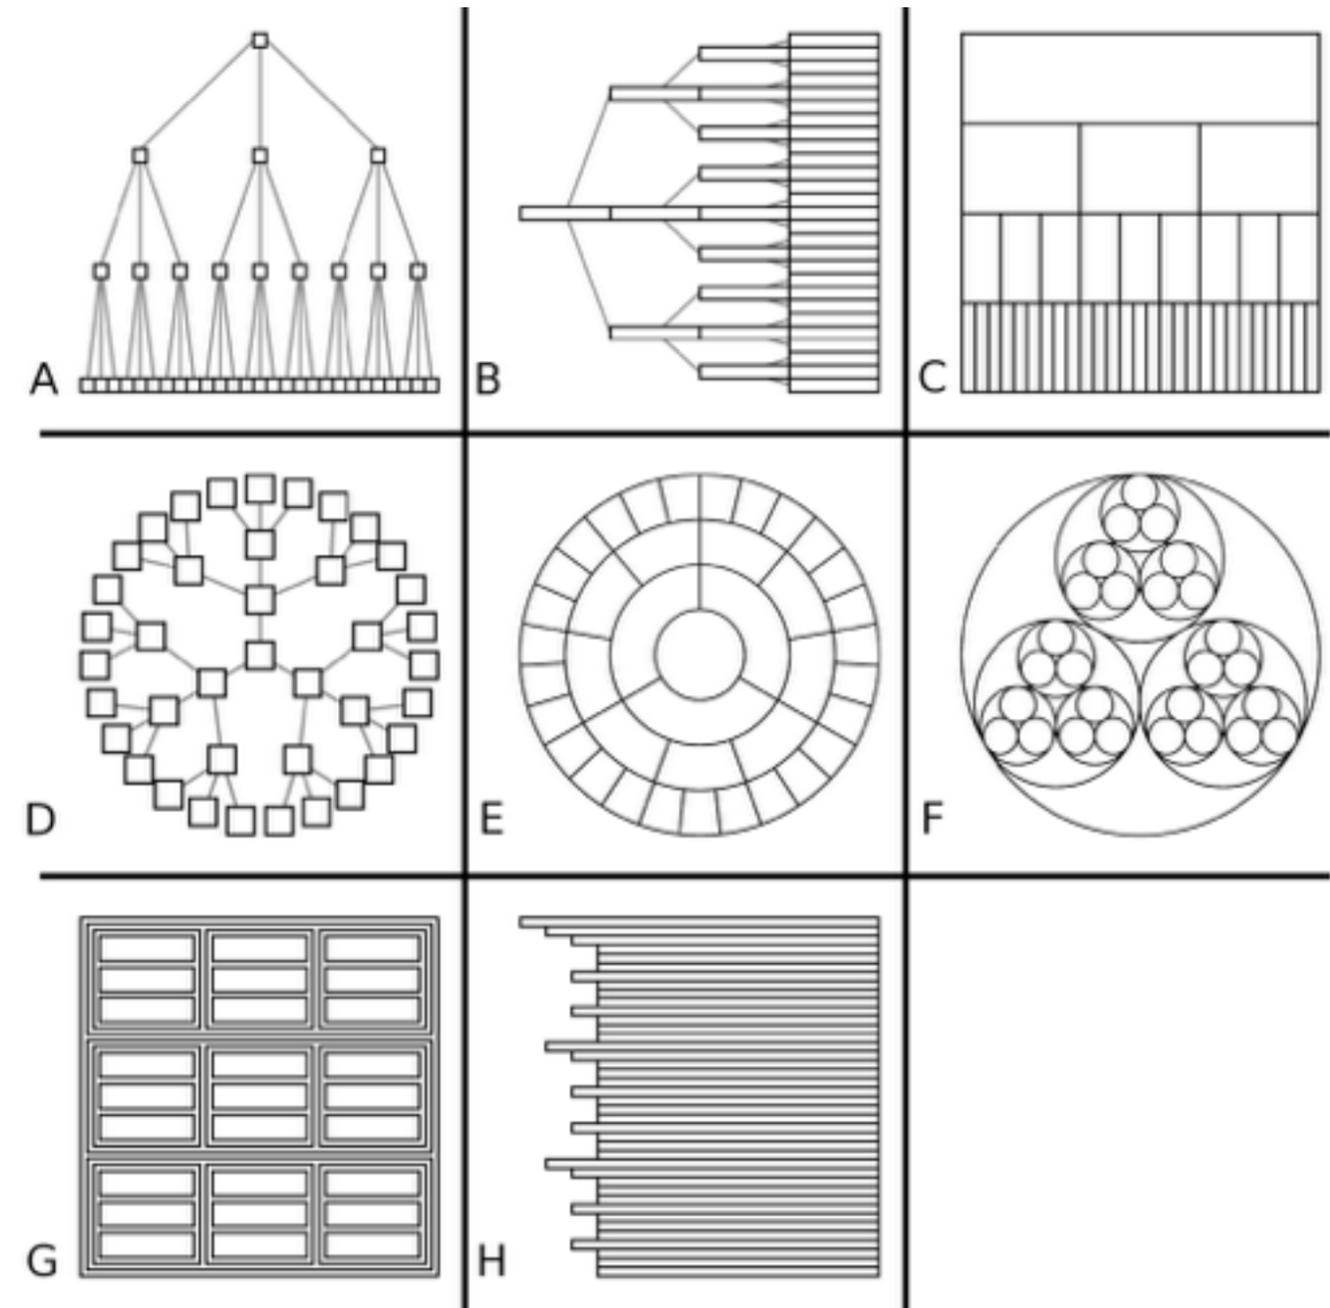

[Quantifying the Space-Efficiency of 2D Graphical Representations of Trees. McGuffin and Robert. Information Visualization 9:2 (2010), 115–140.]

Further reading


- Visualization Analysis and Design. Munzner. AK Peters Visualization Series, CRC Press, 2014.
–*Chap 9: Arrange Networks and Trees*
- Visual Analysis of Large Graphs: State-of-the-Art and Future Research Challenges. von Landesberger et al. Computer Graphics Forum 30:6 (2011), 1719–1749.
- Simple Algorithms for Network Visualization: A Tutorial. McGuffin. Tsinghua Science and Technology (Special Issue on Visualization and Computer Graphics) 17:4 (2012), 383–398.
- Drawing on Physical Analogies. Brandes. In Drawing Graphs: Methods and Models, LNCS Tutorial, 2025, edited by M. Kaufmann and D. Wagner, LNCS Tutorial, 2025, pp. 71–86. Springer-Verlag, 2001.
- <http://www.treevis.net> Treevis.net: A Tree Visualization Reference. Schulz. IEEE Computer Graphics and Applications 31:6 (2011), 11–15.
- Perceptual Guidelines for Creating Rectangular Treemaps. Kong, Heer, and Agrawala. IEEE Trans. Visualization and Computer Graphics (Proc. InfoVis) 16:6 (2010), 990–998.

Outline

- **Session 1 8:30-10:00am**
Visualization Analysis Framework
 - Introduction: Definitions
 - Analysis: What, Why, How
 - Marks and Channels
- **Session 2 10:30am-12:00pm**
Spatial Layout
 - Arrange Tables
 - Arrange Spatial Data
 - Arrange Networks and Trees
- **Session 3 1:00-2:30pm**
Color & Interaction
 - **Map Color**
 - Manipulate: Change, Select, Navigate
 - Facet: Juxtapose, Partition, Superimpose
- **Session 4 3:00-4:30pm**
Guidelines and Examples
 - Reduce: Filter, Aggregate
 - Rules of Thumb
 - Q&A

Idiom design choices: Encode

Encode

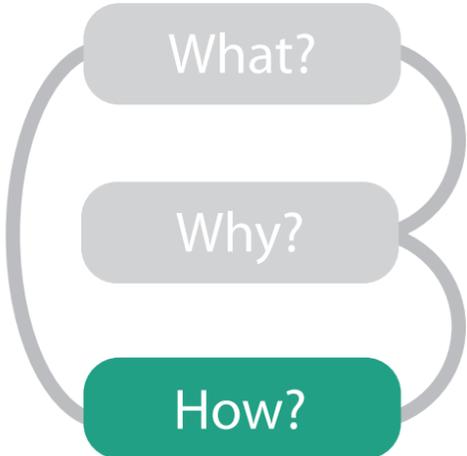


→ Arrange

→ Express



→ Separate

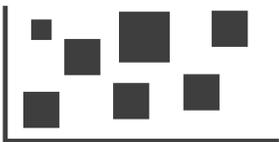

→ Order



→ Align



→ Use



→ Map

from **categorical** and **ordered** attributes

→ Color

→ Hue



→ Saturation



→ Luminance



→ Size, Angle, Curvature, ...



→ Shape






→ Motion

Direction, Rate, Frequency, ...



Categorical vs ordered color

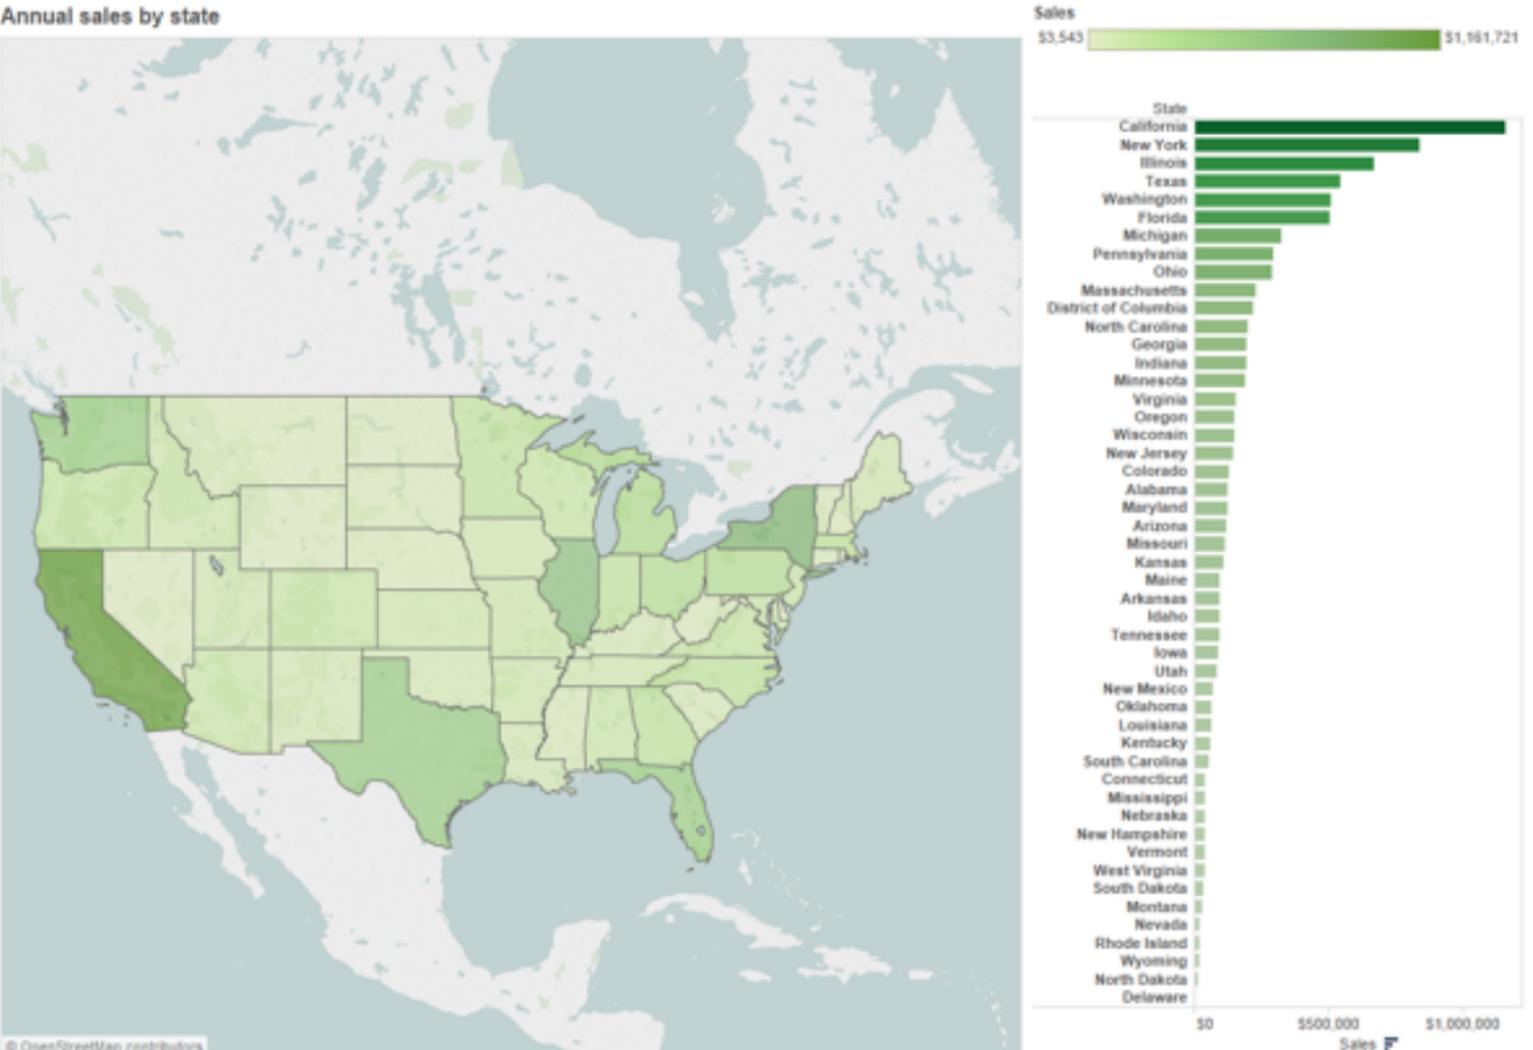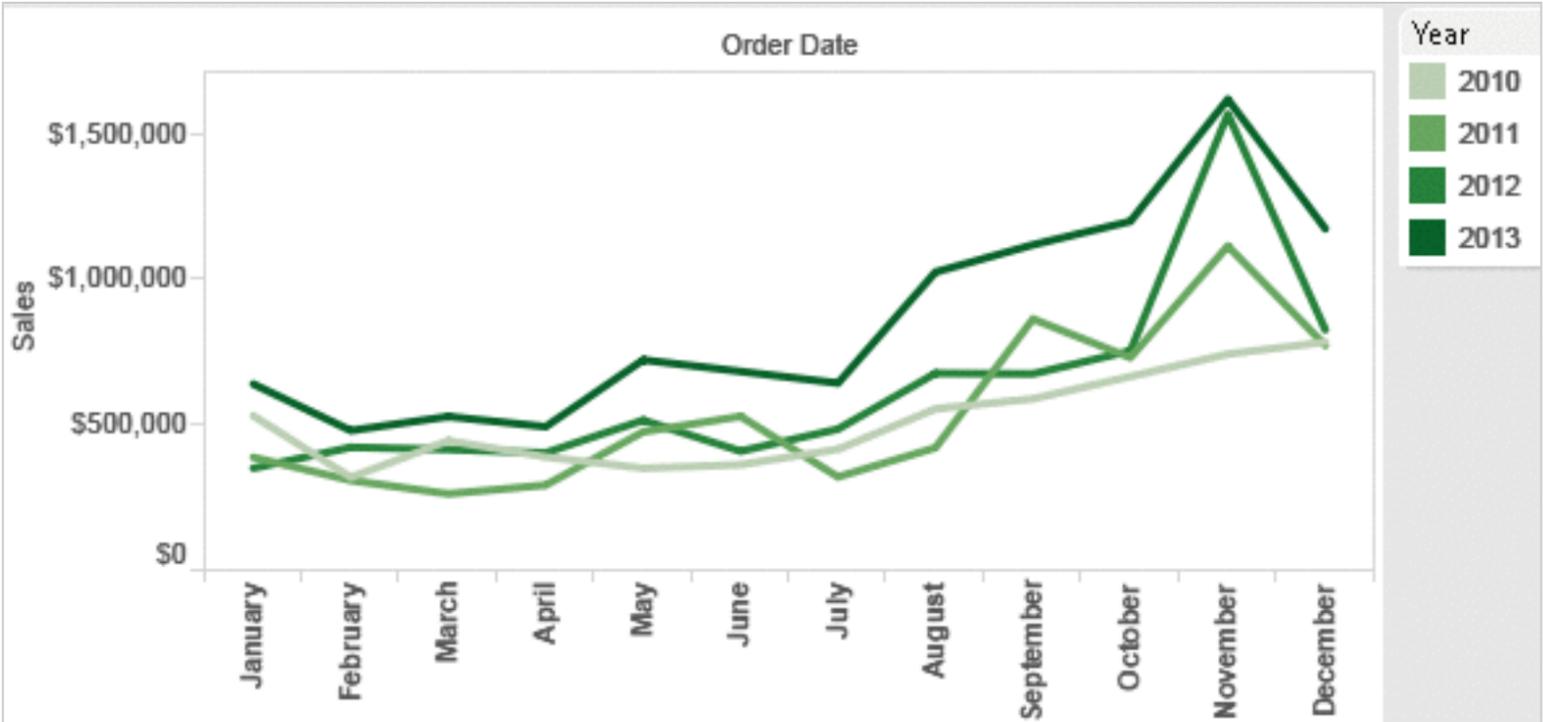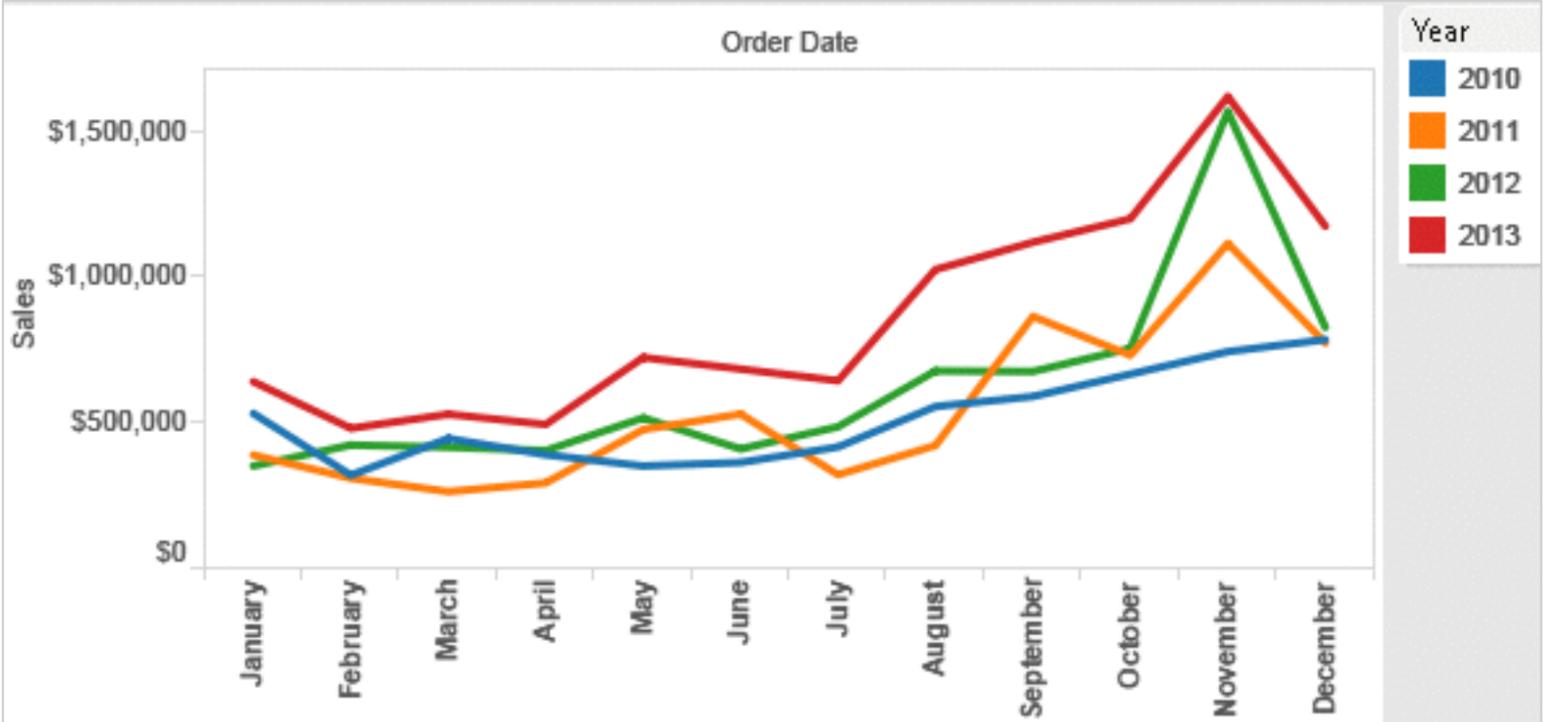


[Seriously Colorful: Advanced Color Principles & Practices. Stone.Tableau Customer Conference 2014.]

Color: Luminance, saturation, hue


- 3 channels
 - identity for categorical
 - hue
 - magnitude for ordered
 - luminance
 - saturation
- RGB: poor for encoding
- HSL: better, but beware
 - lightness \neq luminance



Luminance

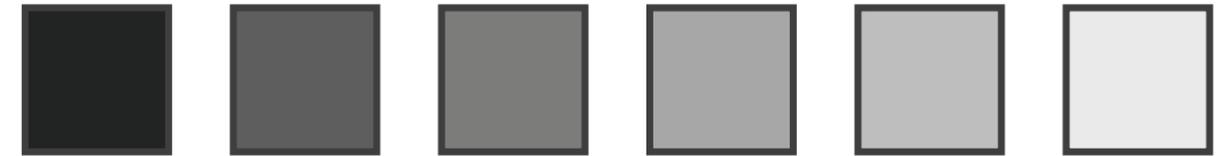

Saturation

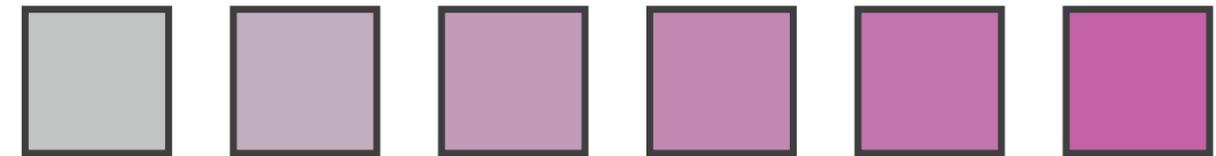

Hue



Corners of the RGB color cube




L from HLS



All the same



Luminance values

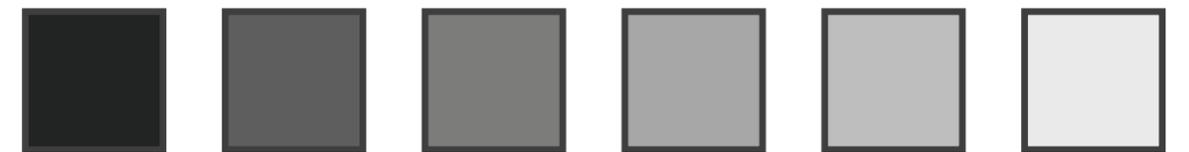

Spectral sensitivity

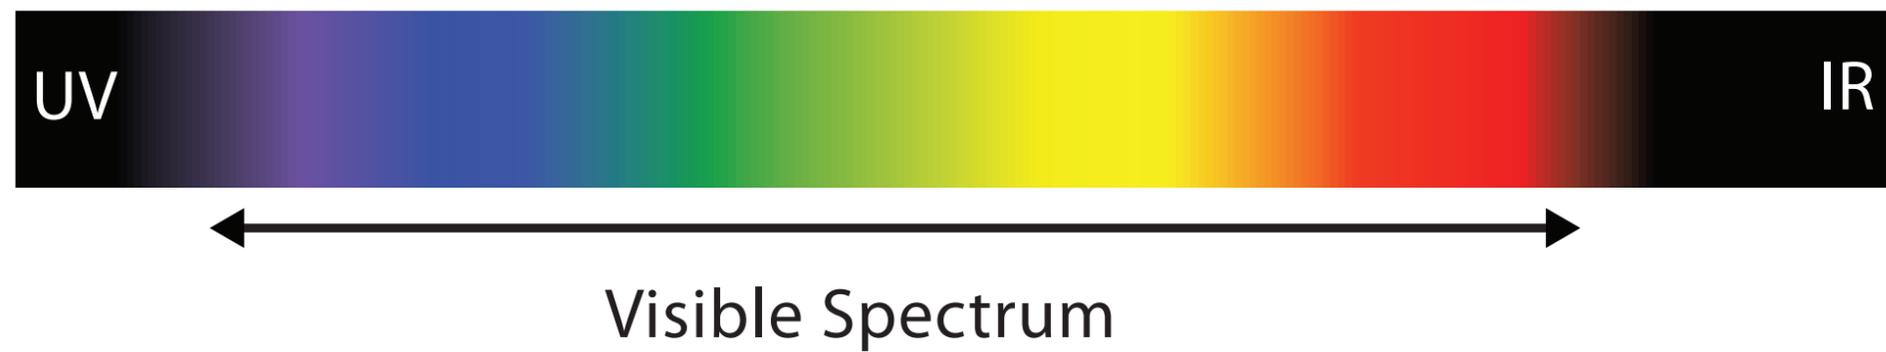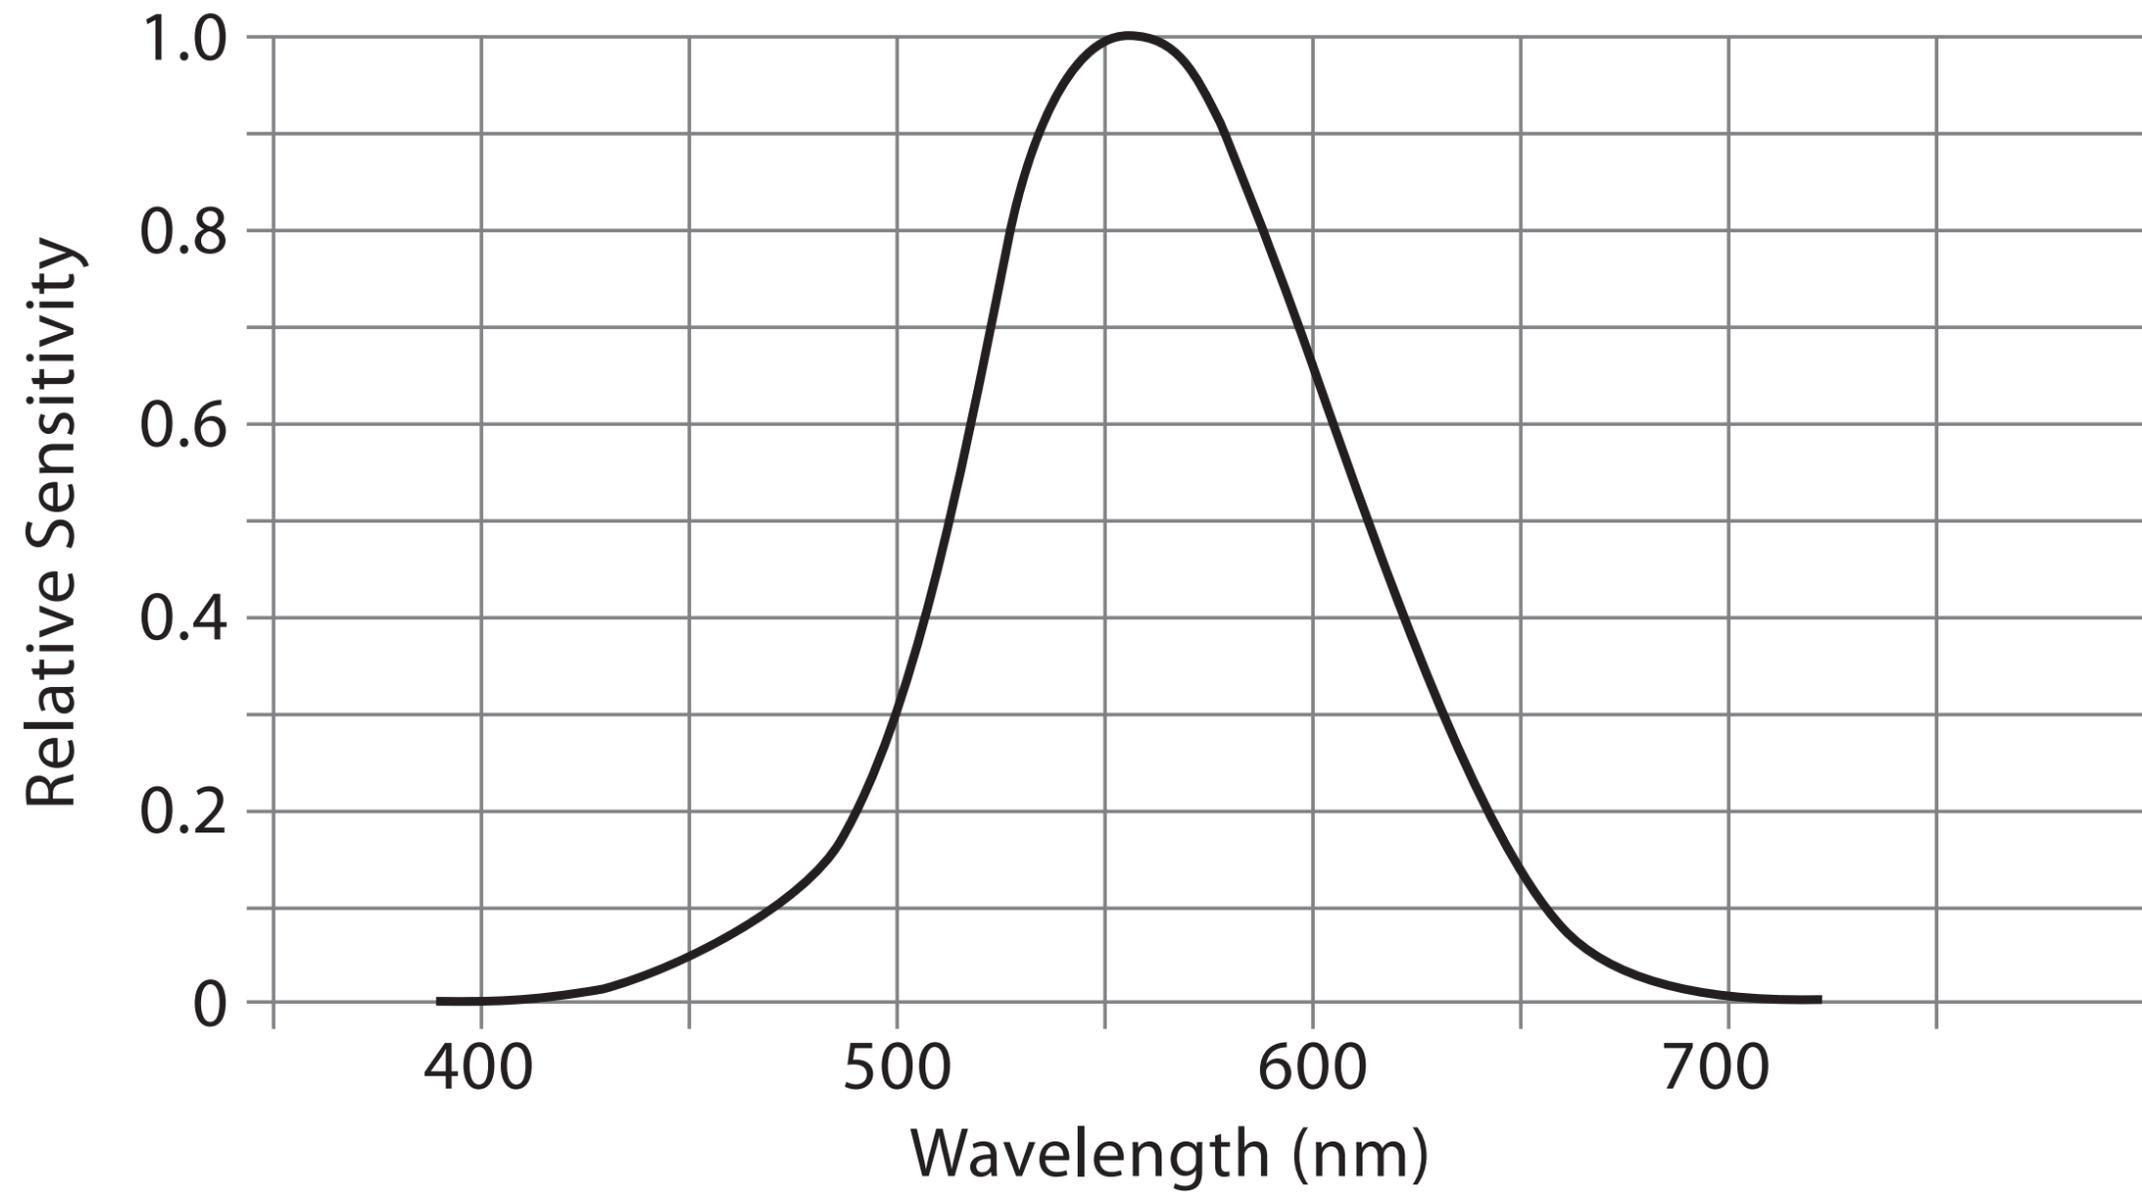

Opponent color and color deficiency


- perceptual processing before optic nerve
 - one achromatic luminance channel L
 - edge detection through luminance contrast
 - two chroma channels, R-G and Y-B axis
- “color blind” if one axis has degraded acuity
 - 8% of men are red/green color deficient
 - blue/yellow is rare



Lightness information



Color information

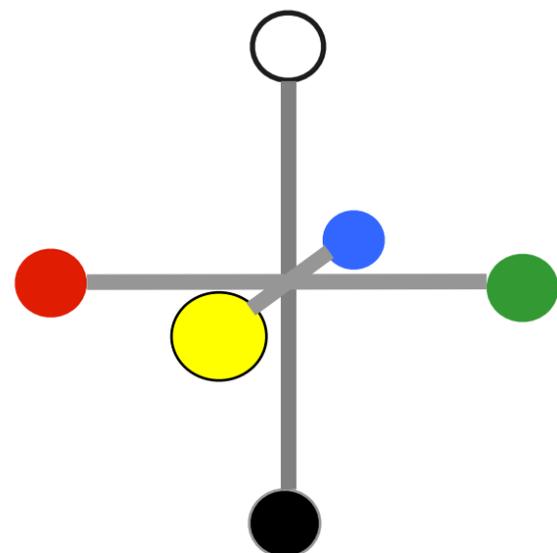

[Seriously Colorful: Advanced Color Principles & Practices. Stone.Tableau Customer Conference 2014.]


Designing for color deficiency: Check with simulator



Normal vision



Deuteranope

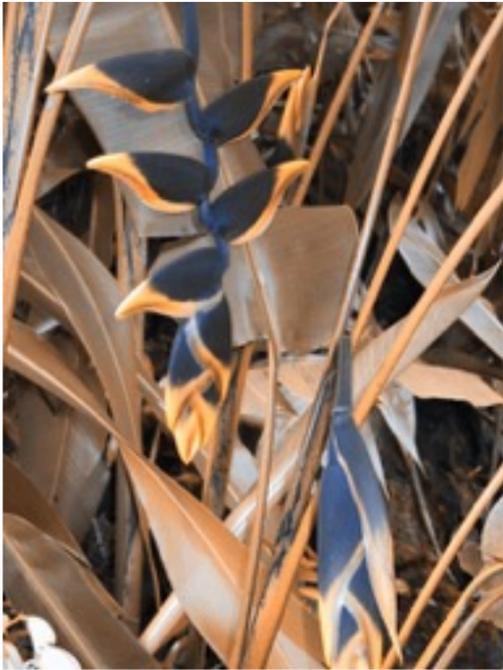


Protanope



Tritanope




<http://rehue.net>

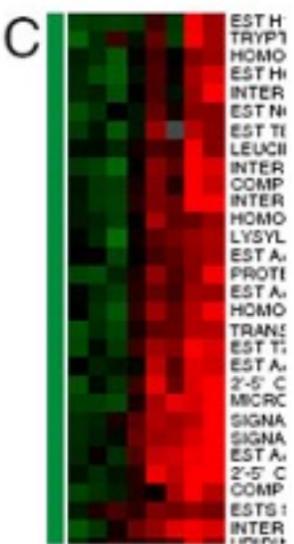

[Seriously Colorful: Advanced Color Principles & Practices. Stone.Tableau Customer Conference 2014.]

Designing for color deficiency: Avoid encoding by hue alone

- redundantly encode
 - vary luminance
 - change shape

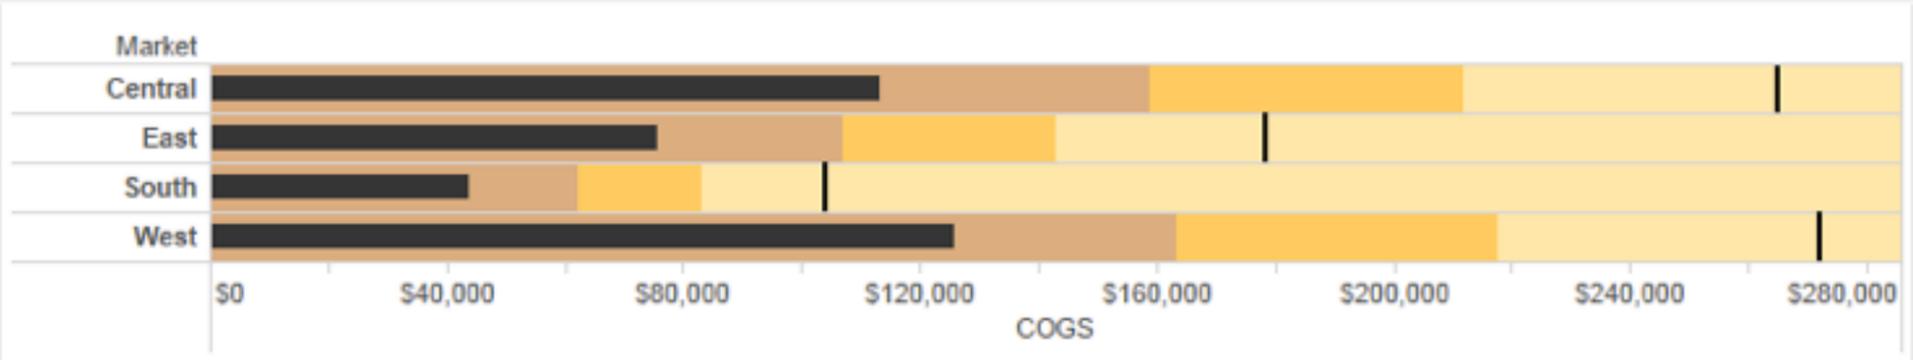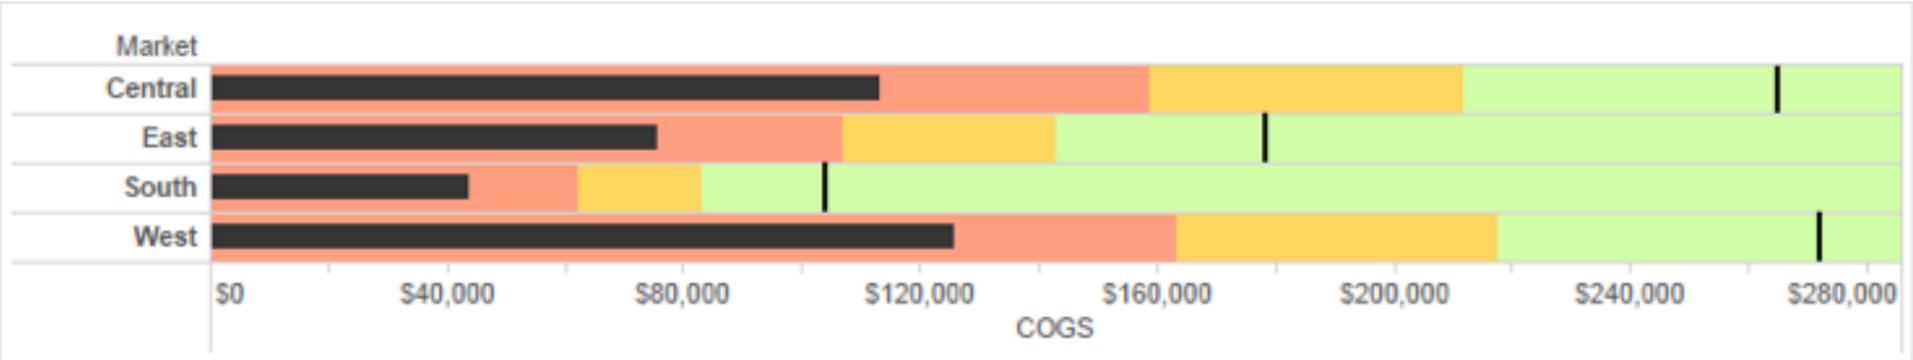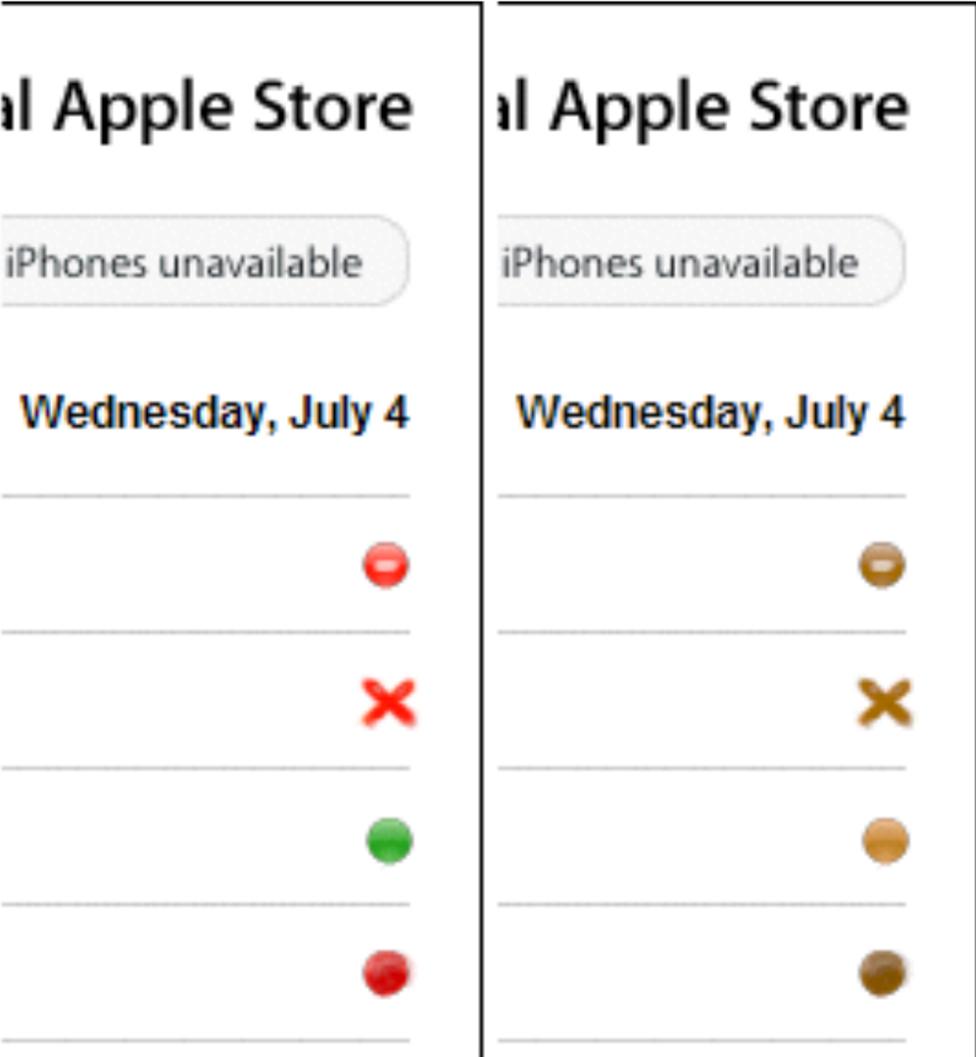


Deuteranope simulation


Change the shape

Vary luminance


Color deficiency: Reduces color to 2 dimensions

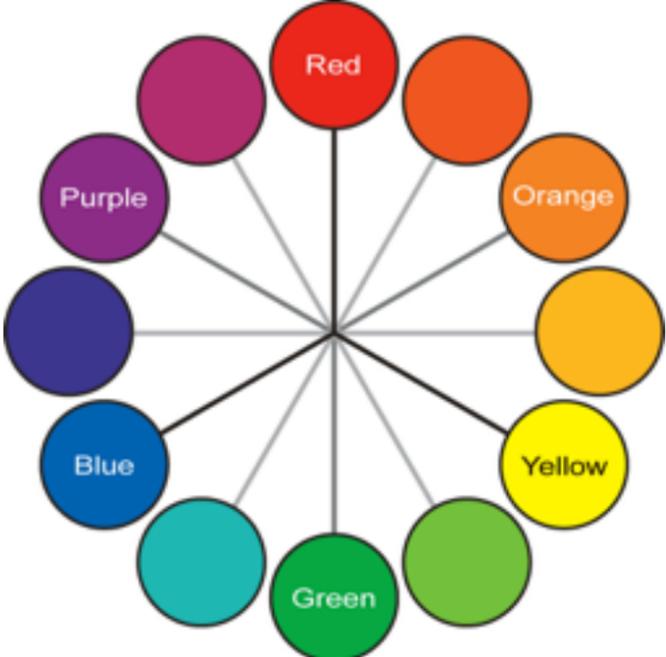


Normal

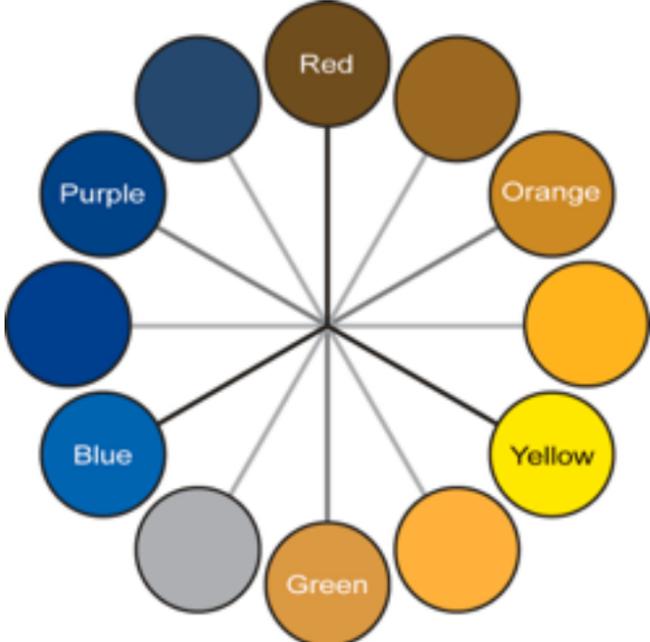

Protanope

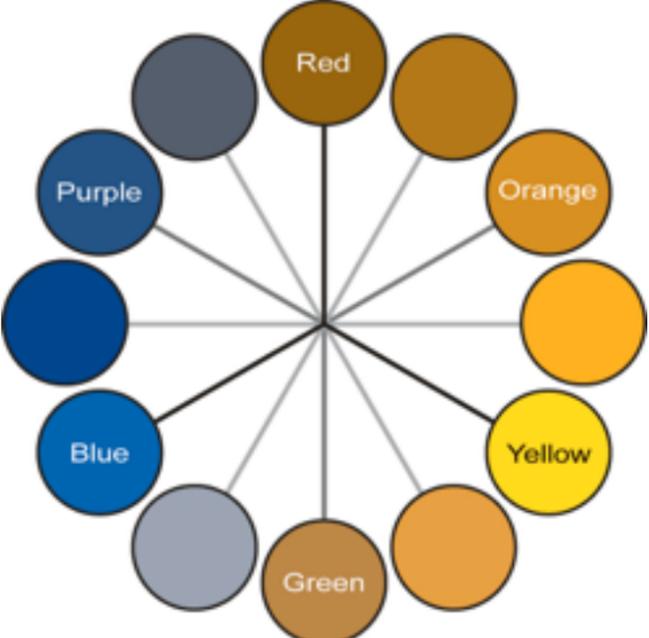


Deuteranope

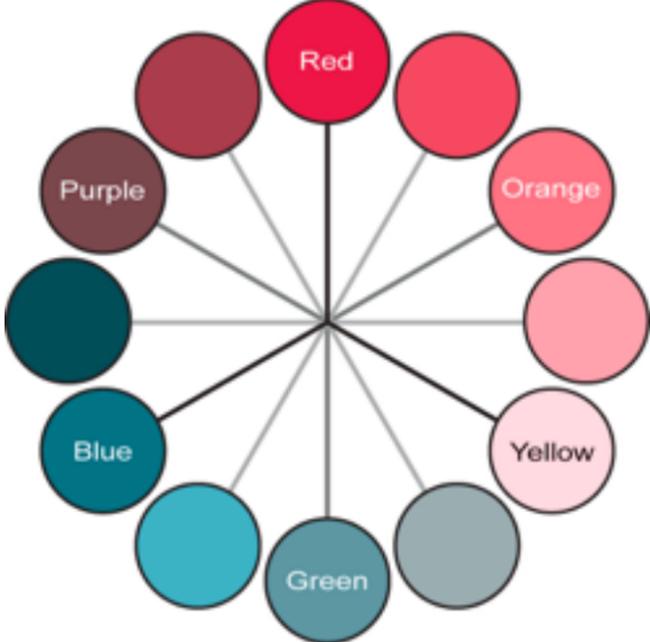

Tritanope

[Seriously Colorful: Advanced Color Principles & Practices. Stone.Tableau Customer Conference 2014.]


Designing for color deficiency: Blue-Orange is safe

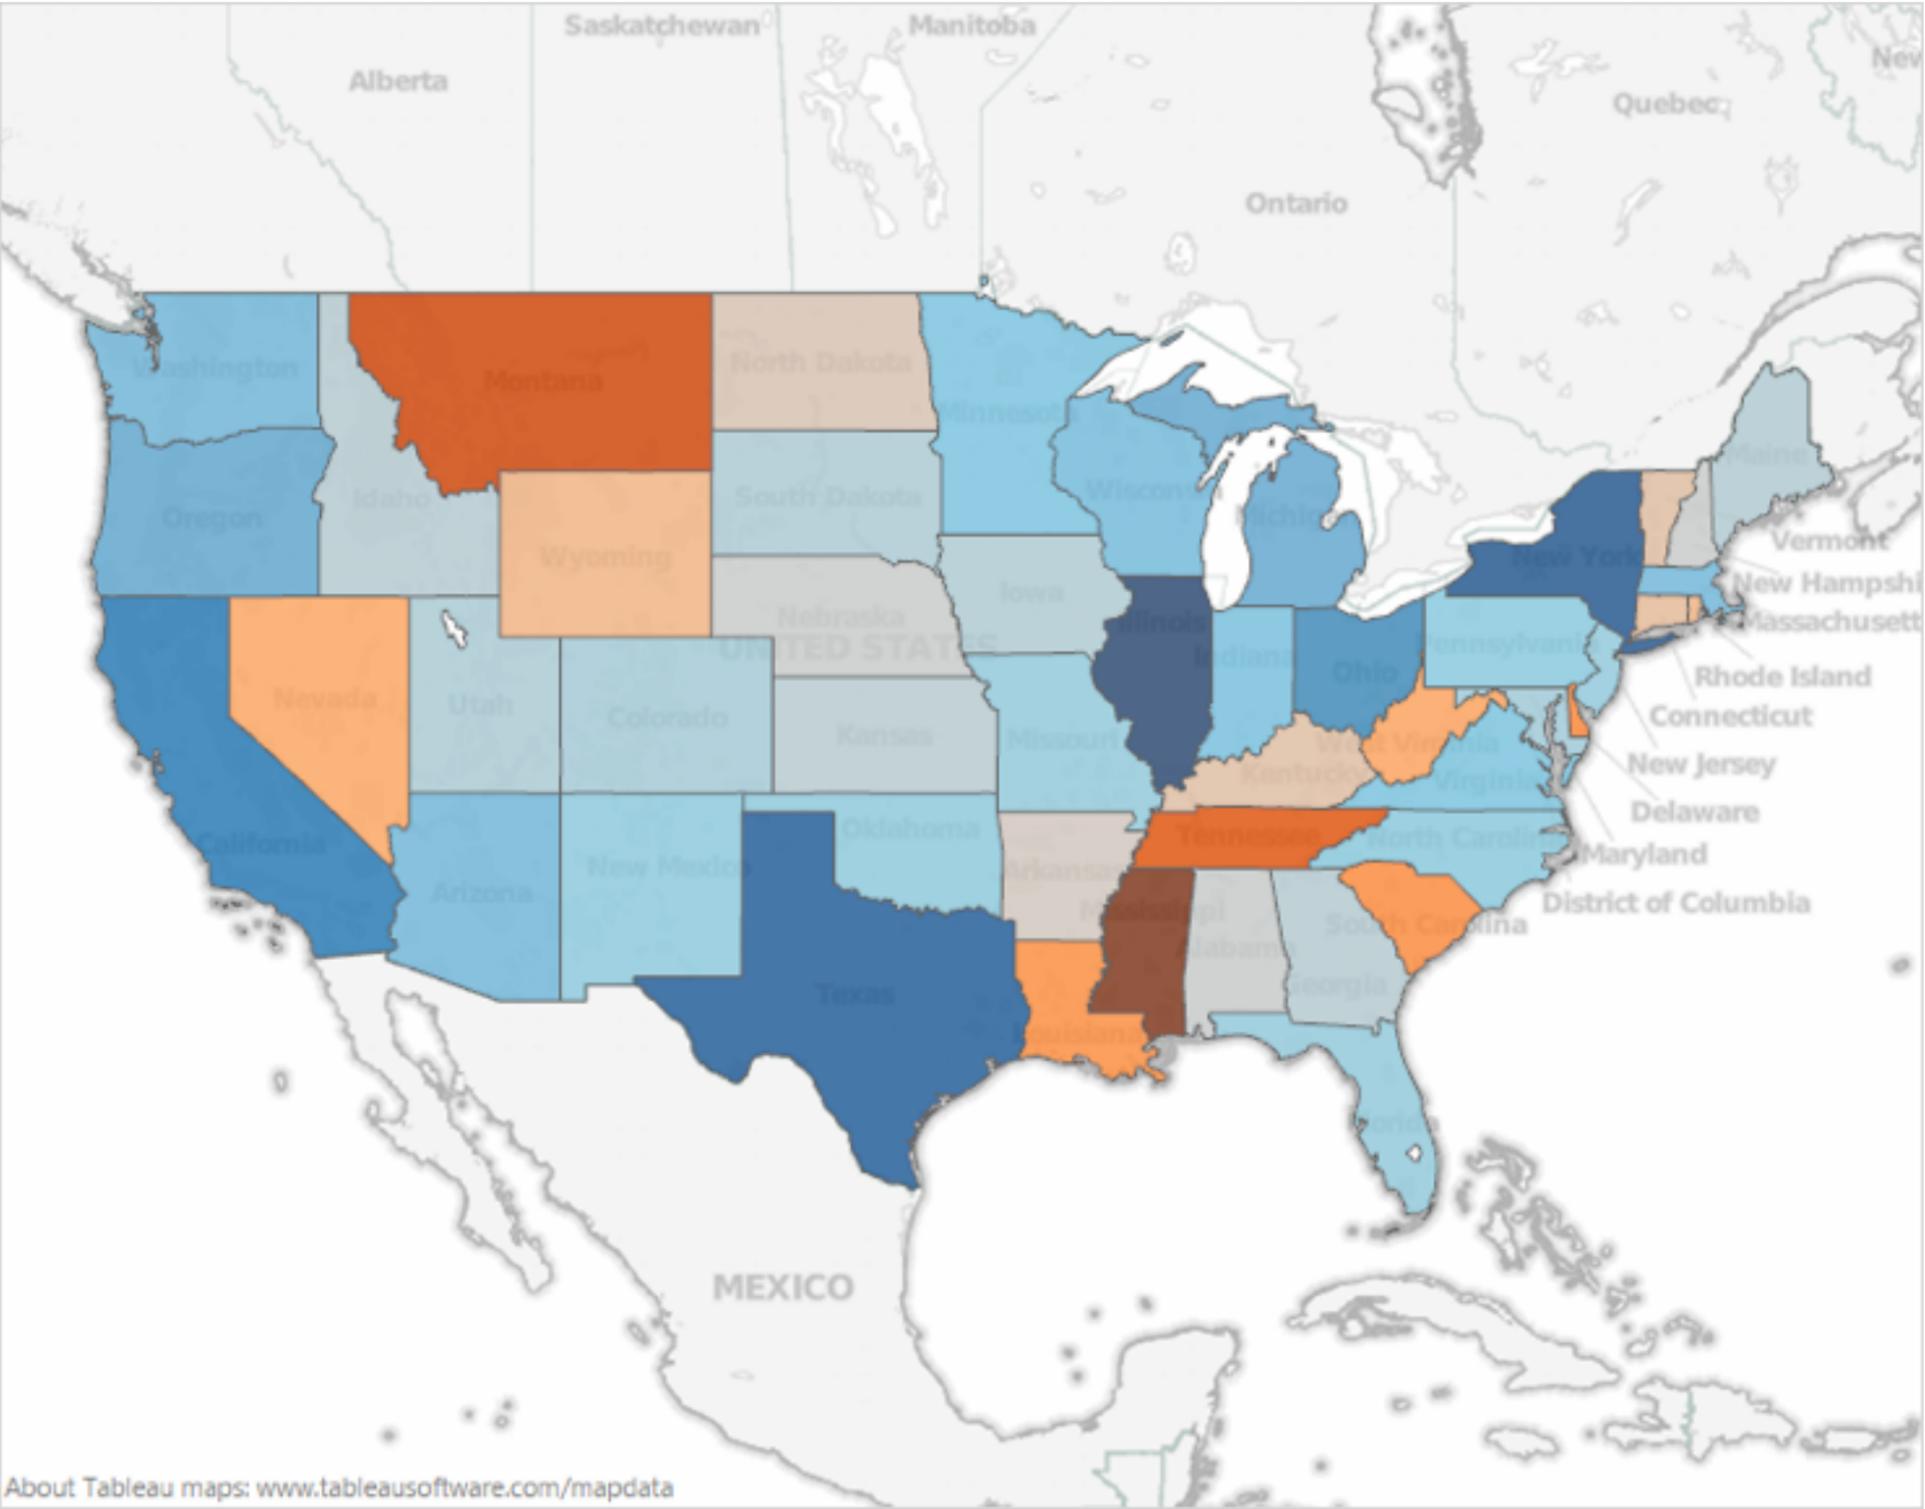

[Seriously Colorful: Advanced Color Principles & Practices. Stone.Tableau Customer Conference 2014.]

Bezold Effect: Outlines matter

- color constancy: simultaneous contrast effect

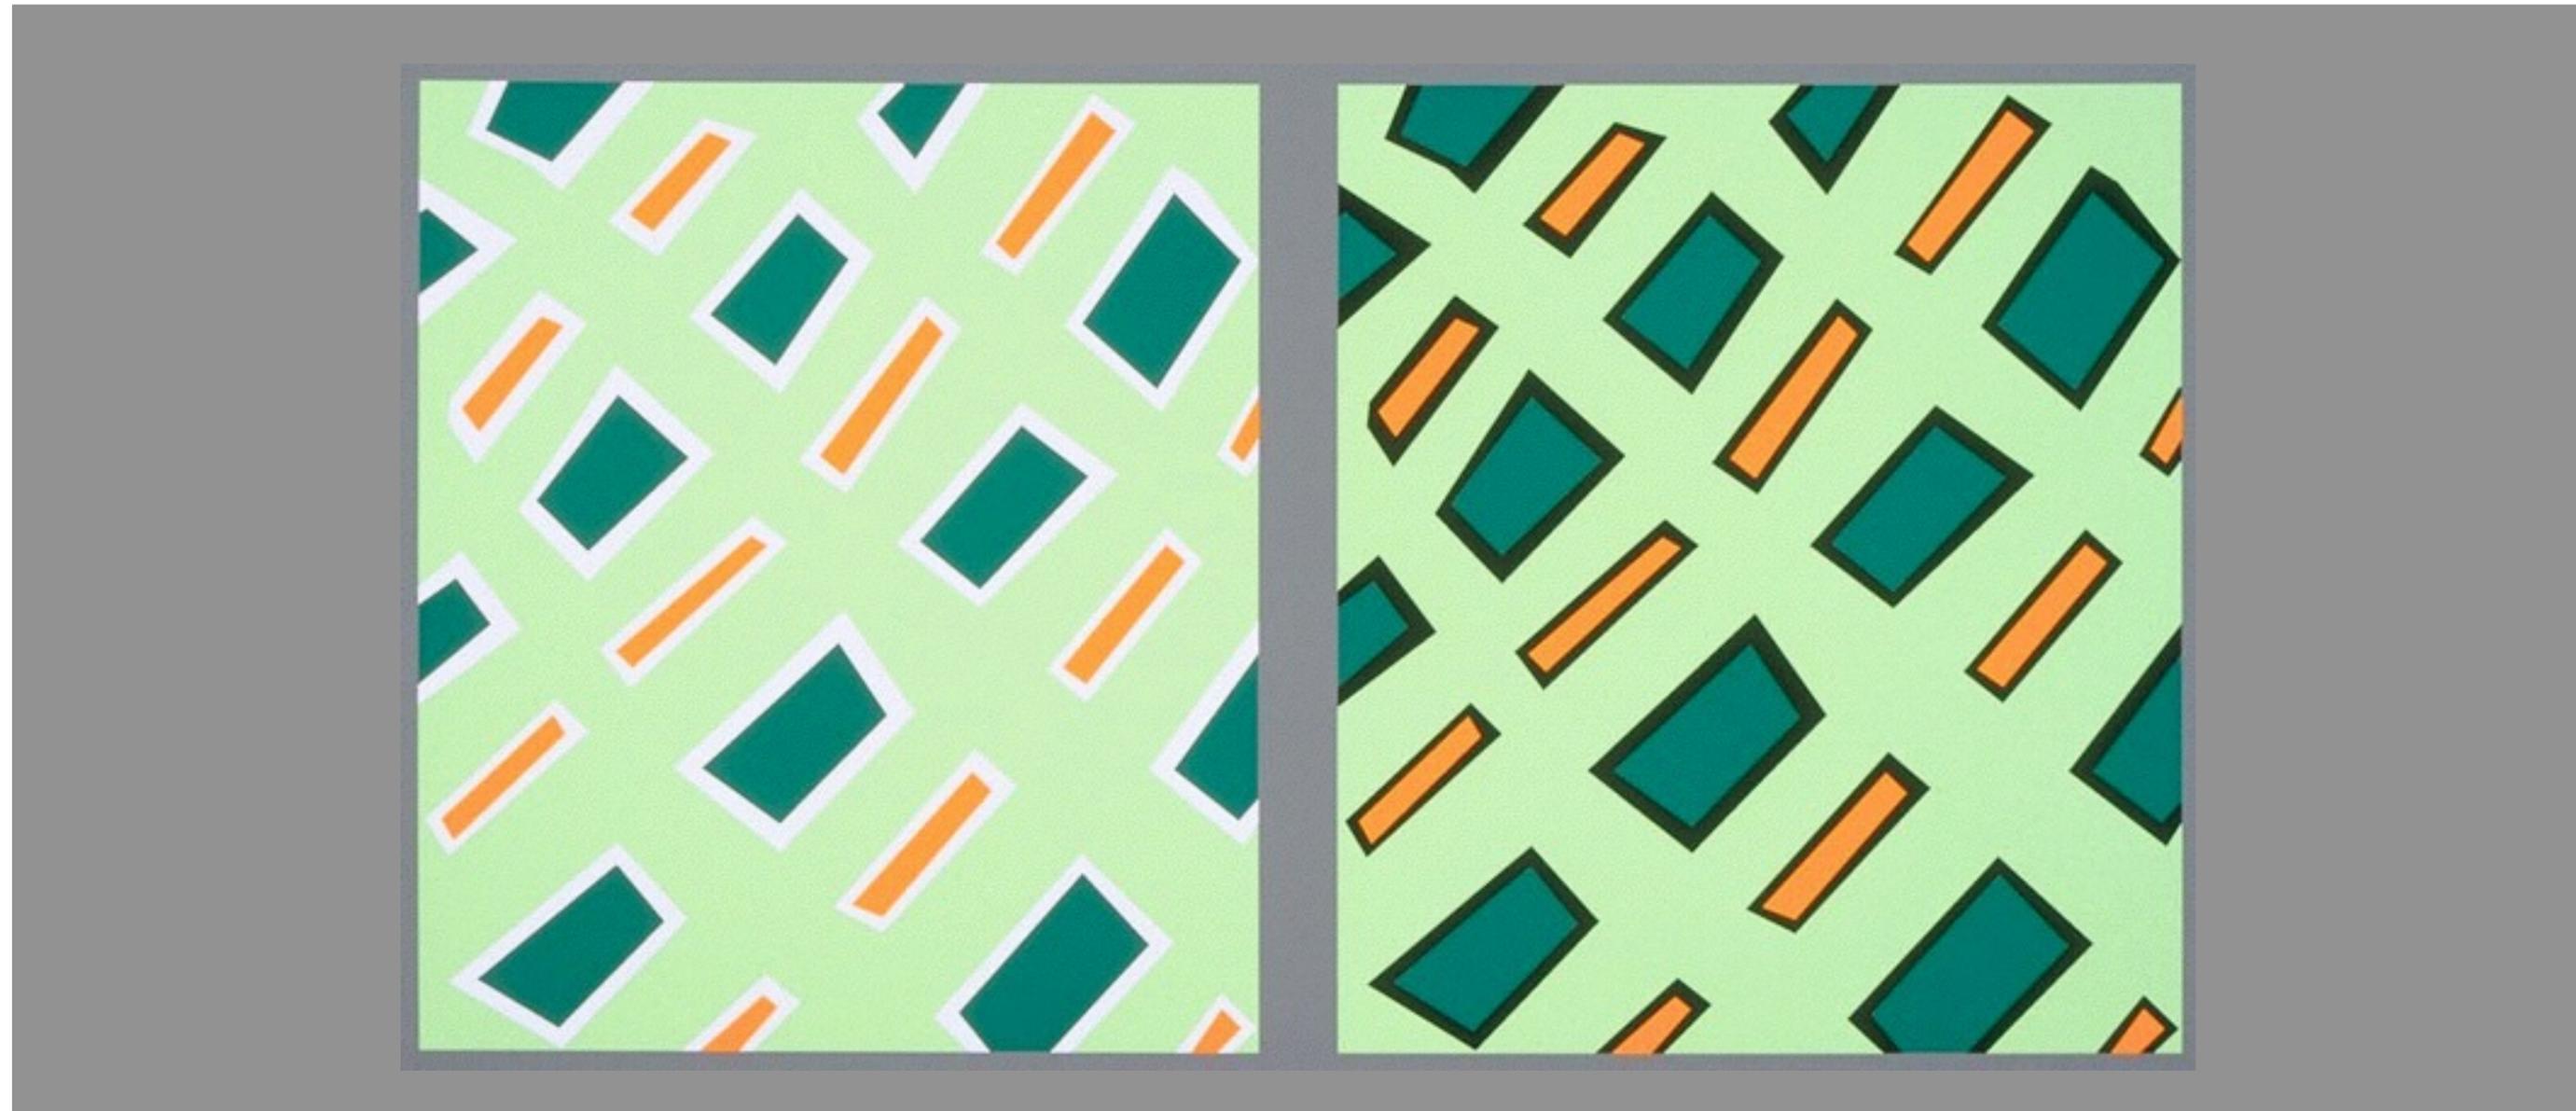

[Seriously Colorful: Advanced Color Principles & Practices. Stone.Tableau Customer Conference 2014.]

Color/Lightness constancy: Illumination conditions

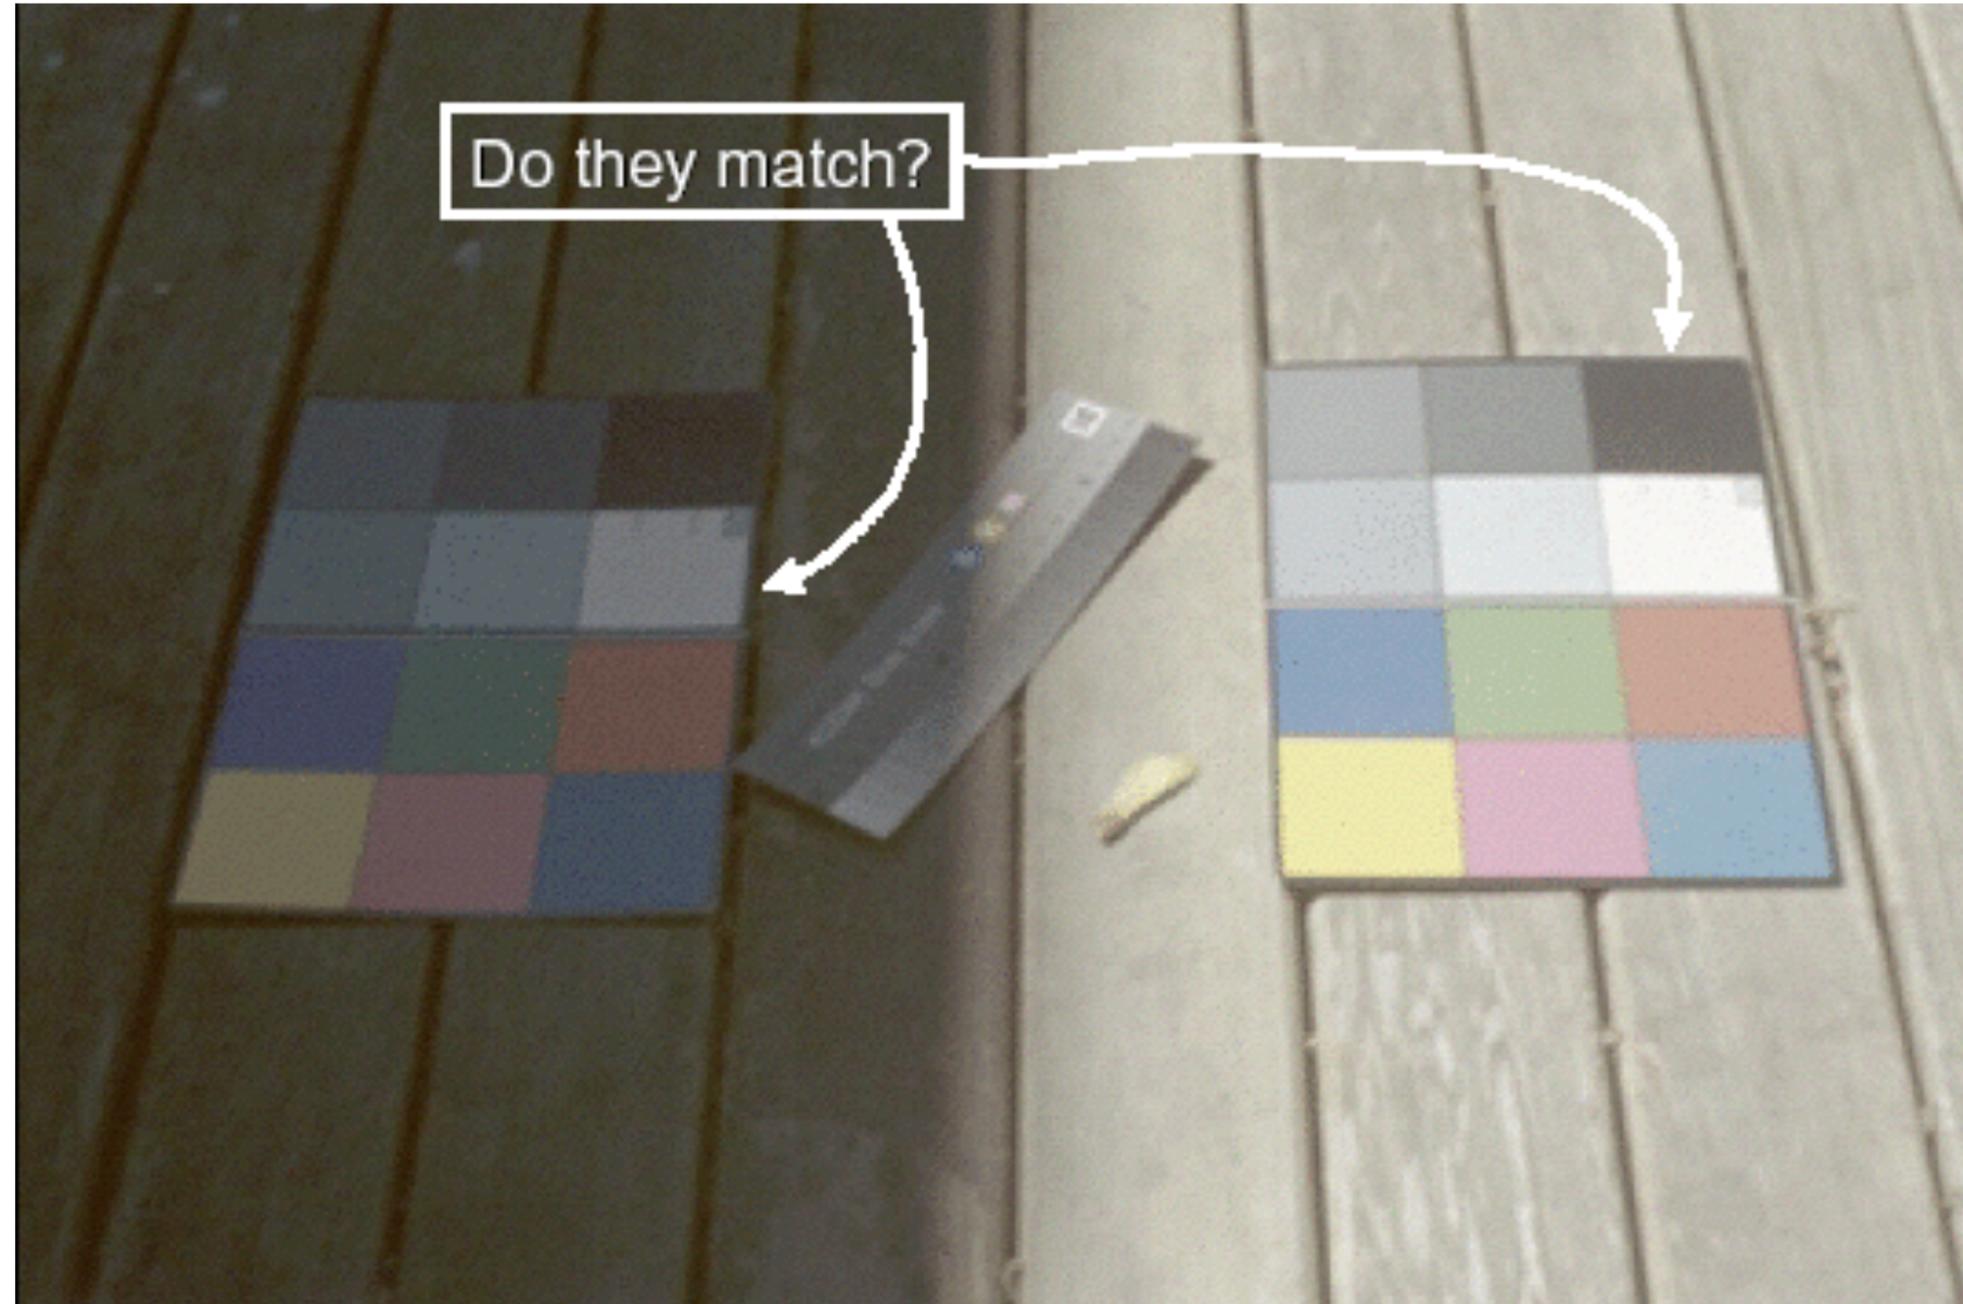


Image courtesy of John McCann

Color/Lightness constancy: Illumination conditions

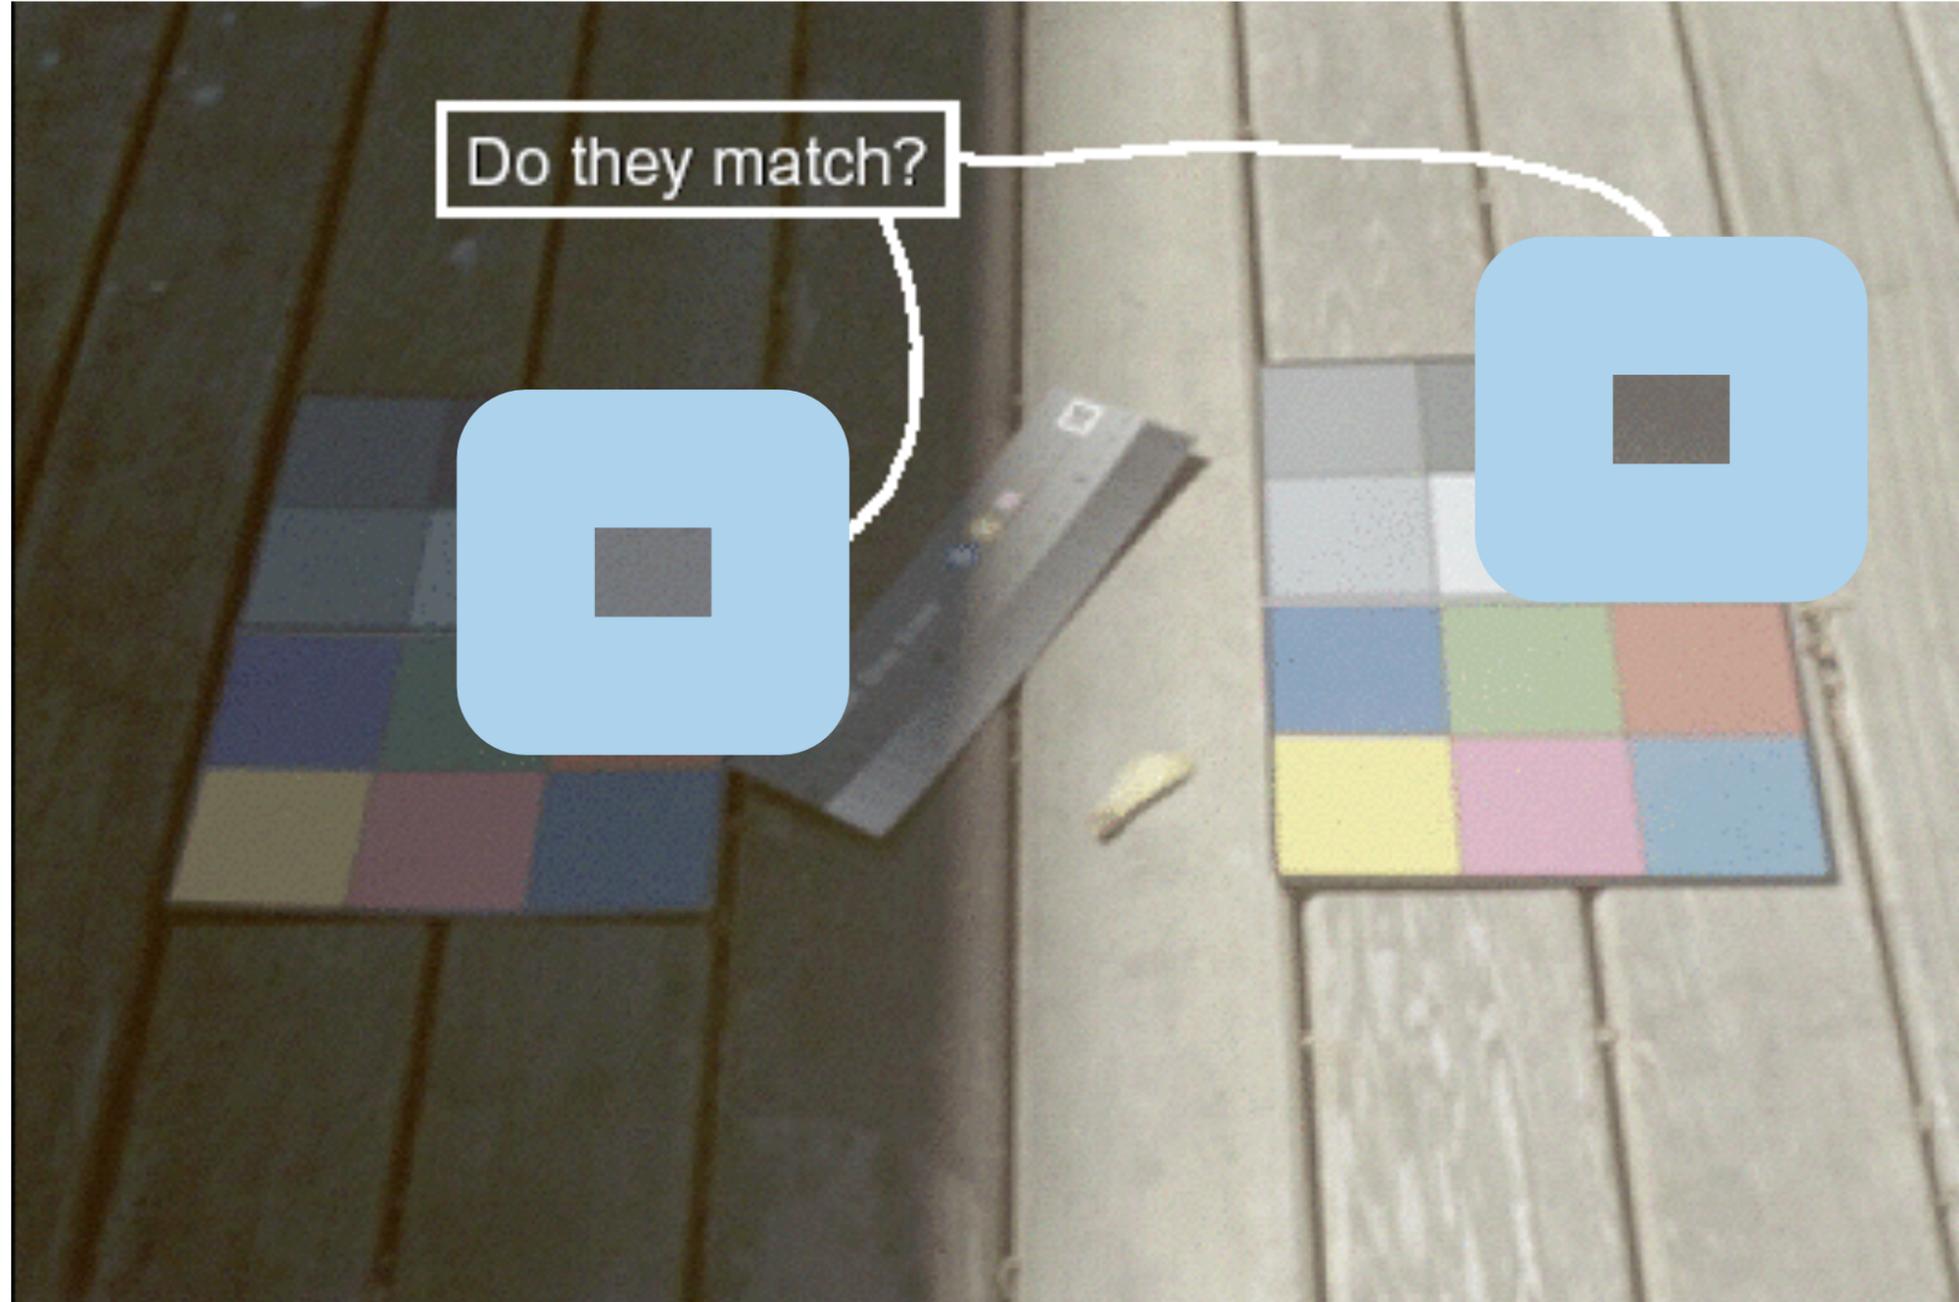


Image courtesy of John McCann

Colormaps

→ Categorical



→ Ordered


→ *Sequential*



→ *Diverging*





Binary



Categorical

Diverging



Sequential

after [Color Use Guidelines for Mapping and Visualization. Brewer, 1994.
<http://www.personal.psu.edu/faculty/c/a/cab38/ColorSch/Schemes.html>]

Colormaps

→ Categorical




→ Ordered

→ *Sequential*




→ Bivariate




→ *Diverging*



Binary



Categorical

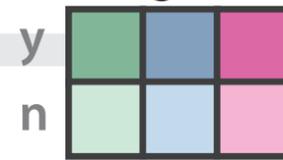


Binary

Categorical




Diverging

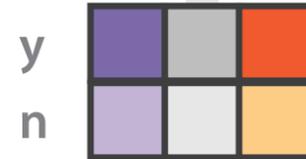


Binary

Diverging




Categorical

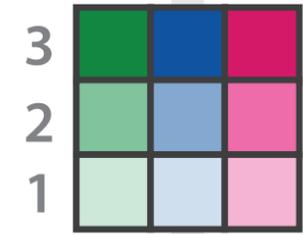

Sequential

Sequential



after [Color Use Guidelines for Mapping and Visualization. Brewer, 1994. <http://www.personal.psu.edu/faculty/c/a/cab38/ColorSch/Schemes.html>]

Colormaps

→ Categorical



→ Ordered


→ Sequential




→ Diverging



→ Bivariate



use with care!

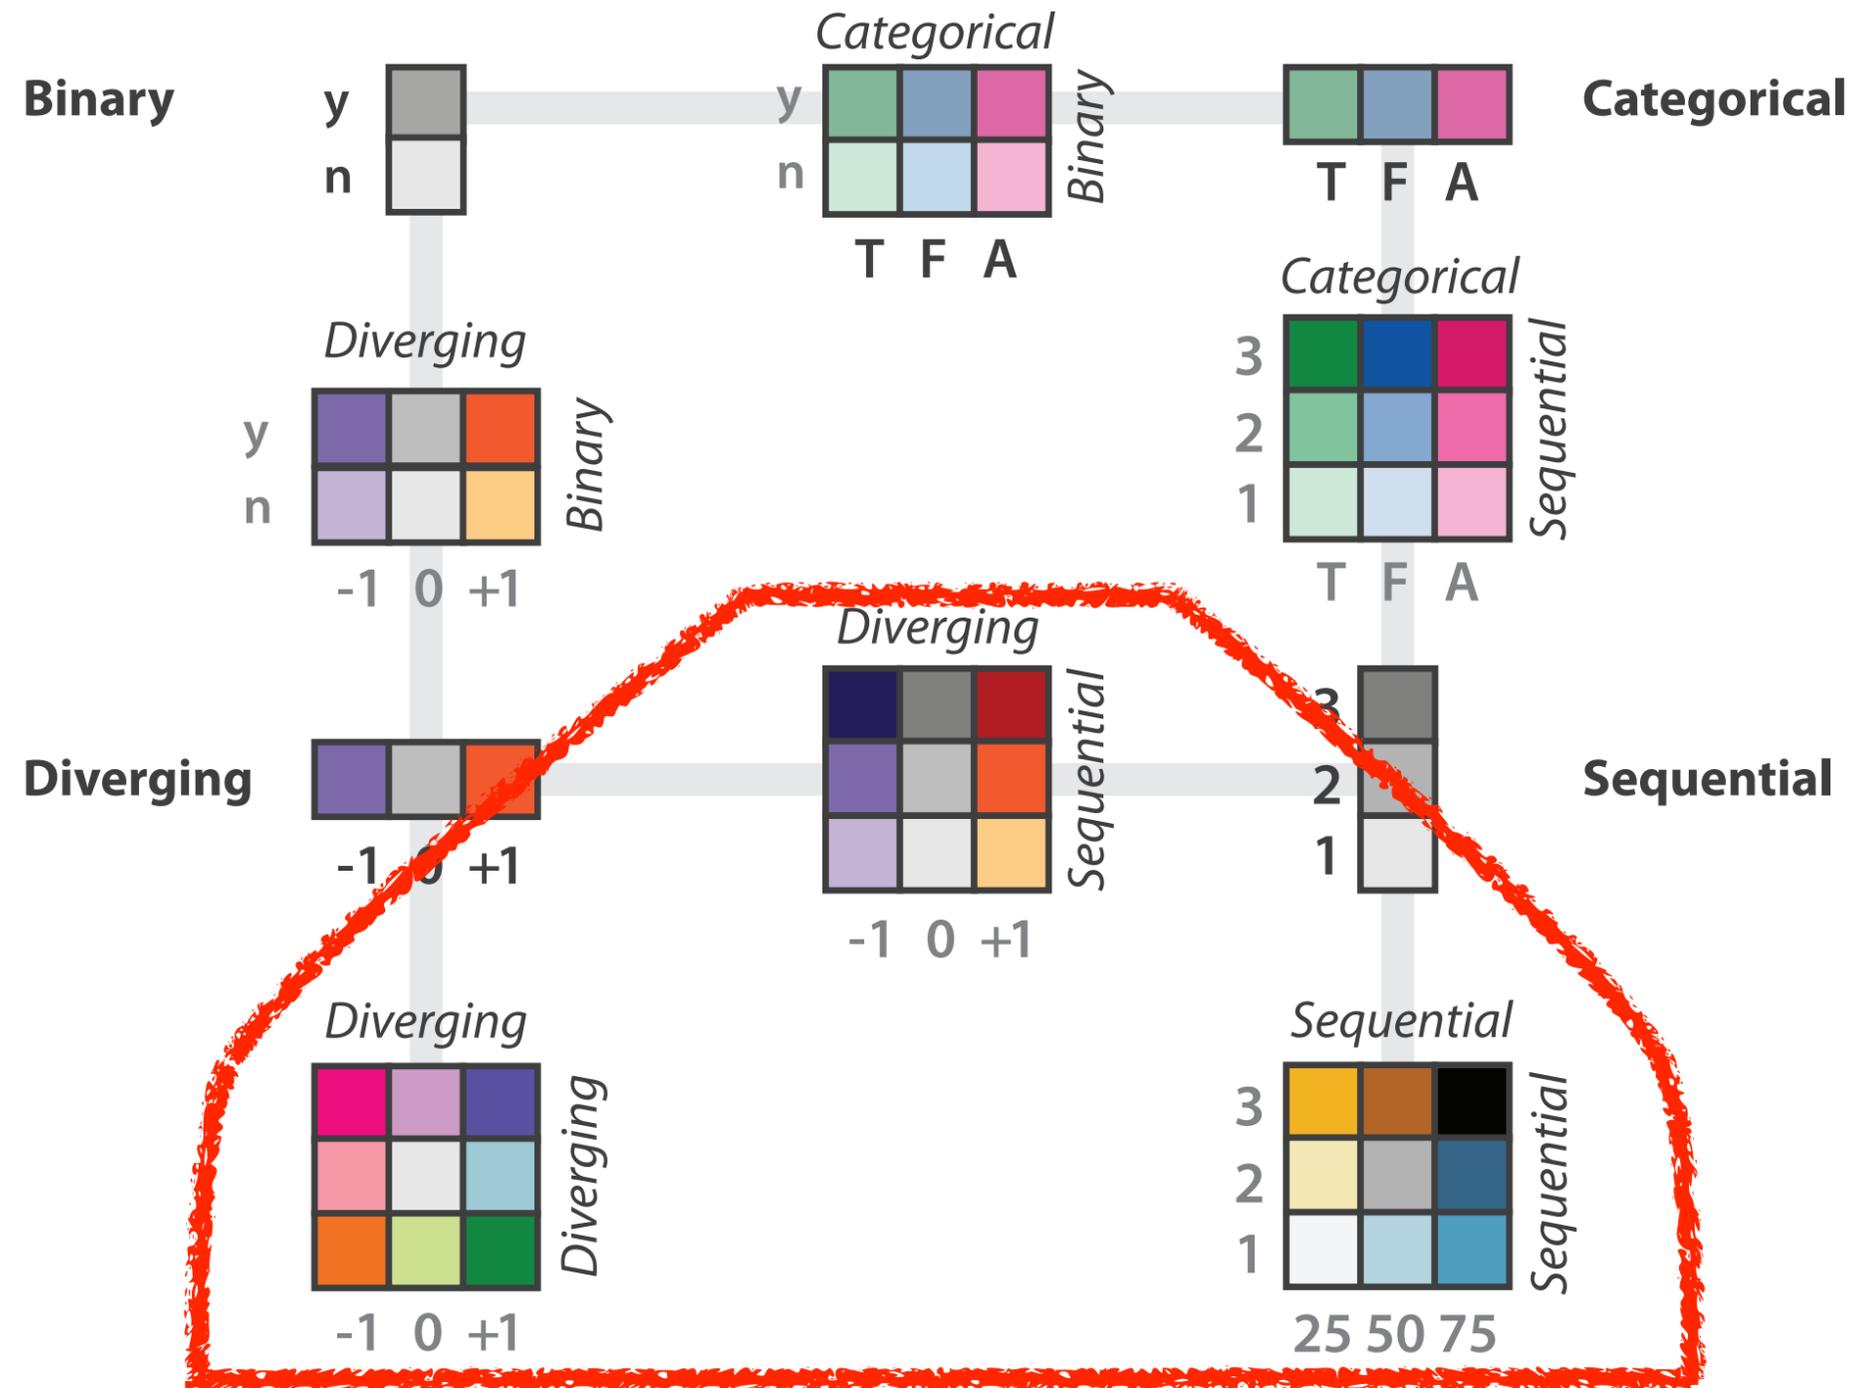

after [Color Use Guidelines for Mapping and Visualization. Brewer, 1994. <http://www.personal.psu.edu/faculty/cl/cab38/ColorSch/Schemes.html>]

Colormaps

→ Categorical



→ Ordered


→ Sequential



→ Diverging



→ Bivariate



- color channel interactions


- size heavily affects salience

- small regions need high saturation

- large need low saturation

- saturation & luminance: 3-4 bins max


- also not separable from transparency

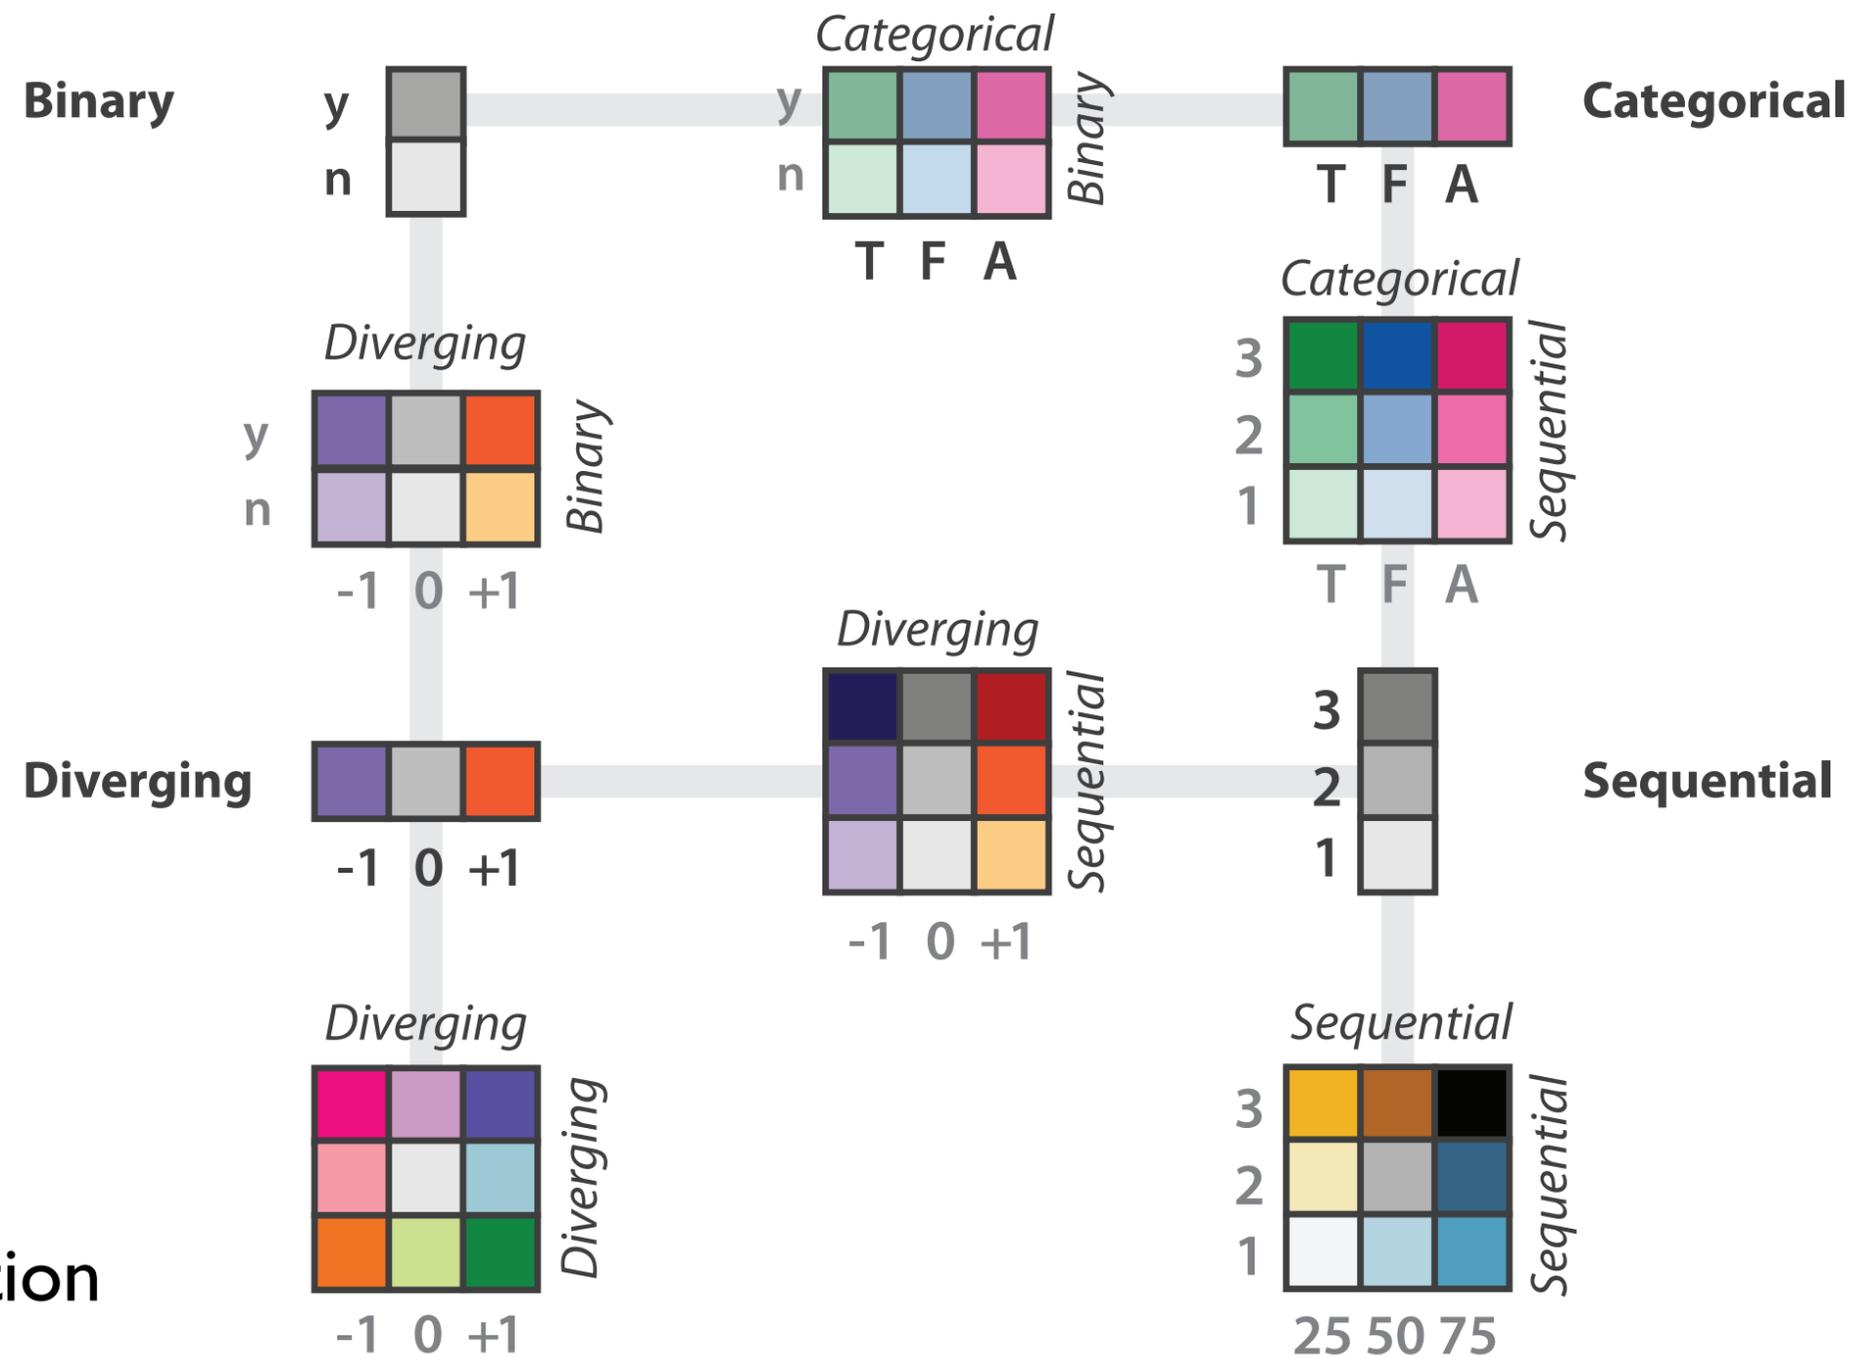

after [Color Use Guidelines for Mapping and Visualization. Brewer, 1994. <http://www.personal.psu.edu/faculty/cl/cab38/ColorSch/Schemes.html>]

Categorical color: Discriminability constraints



- noncontiguous small regions of color: only 6-12 bins

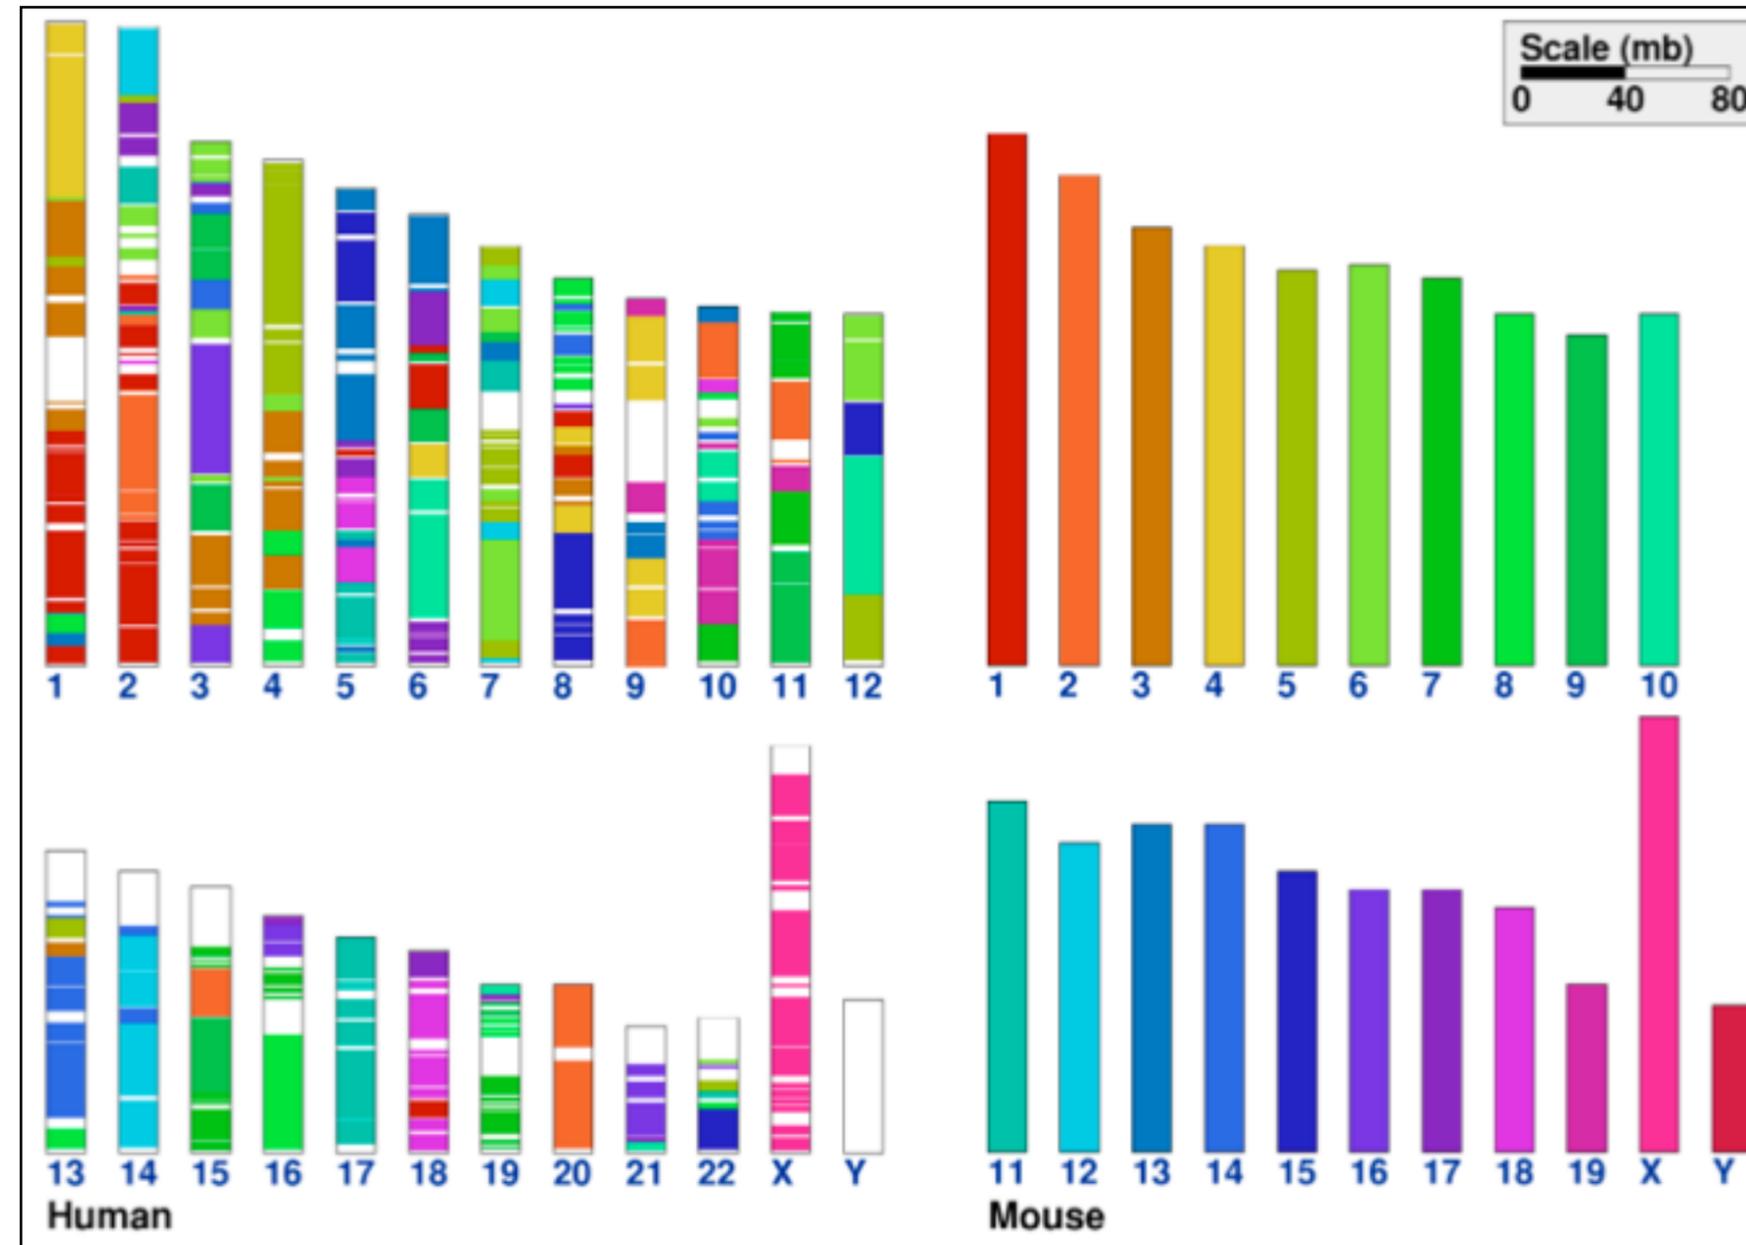

[Cinteny: flexible analysis and visualization of synteny and genome rearrangements in multiple organisms. Sinha and Meller. *BMC Bioinformatics*, 8:82, 2007.]


ColorBrewer

- <http://www.colorbrewer2.org>
- saturation and area example: size affects saliency!

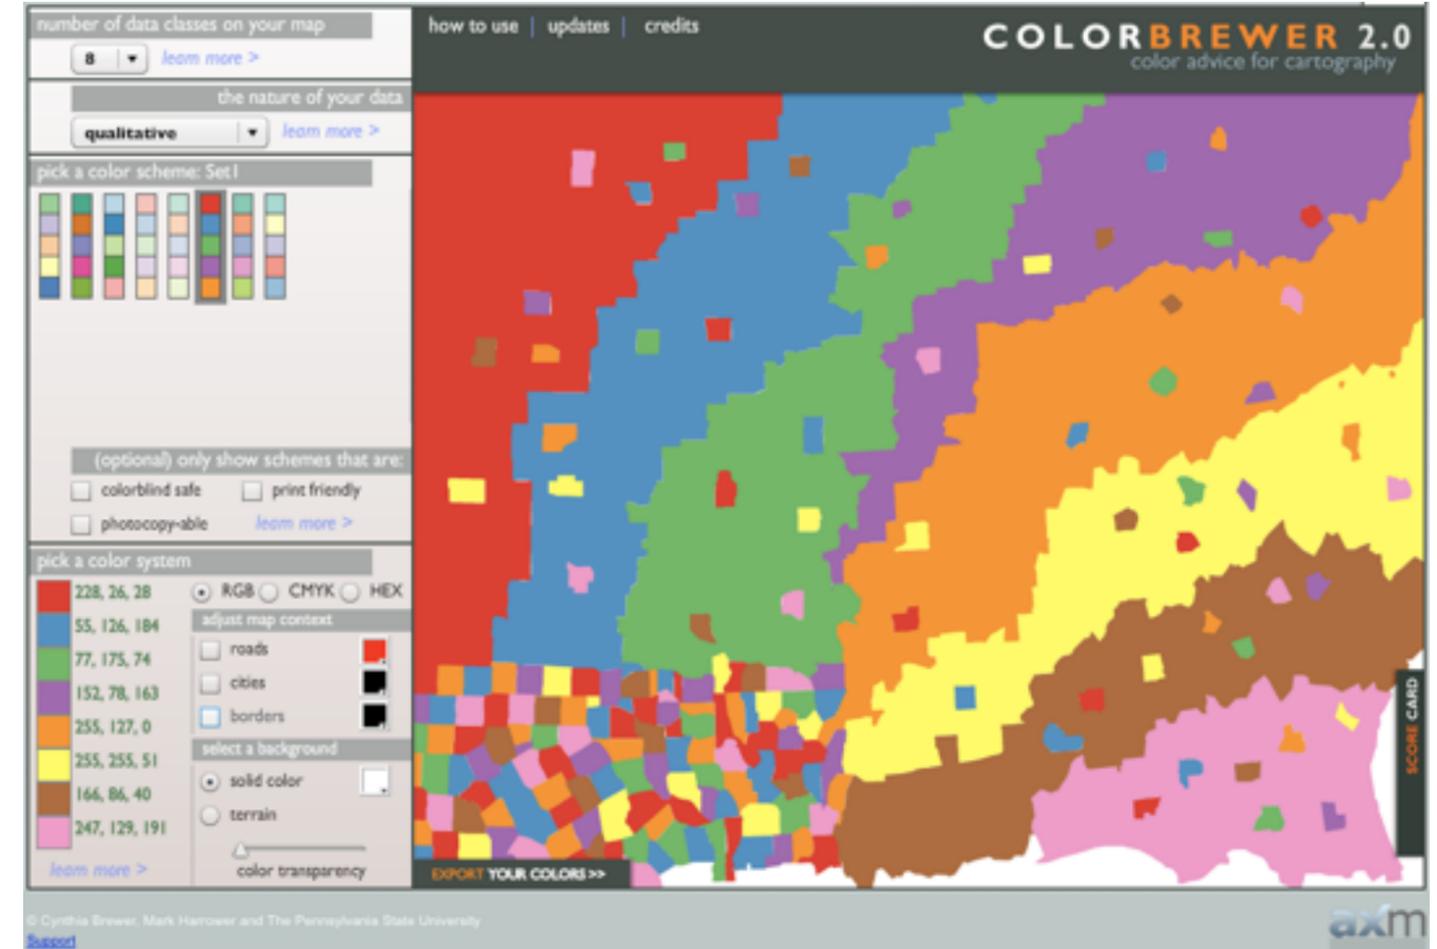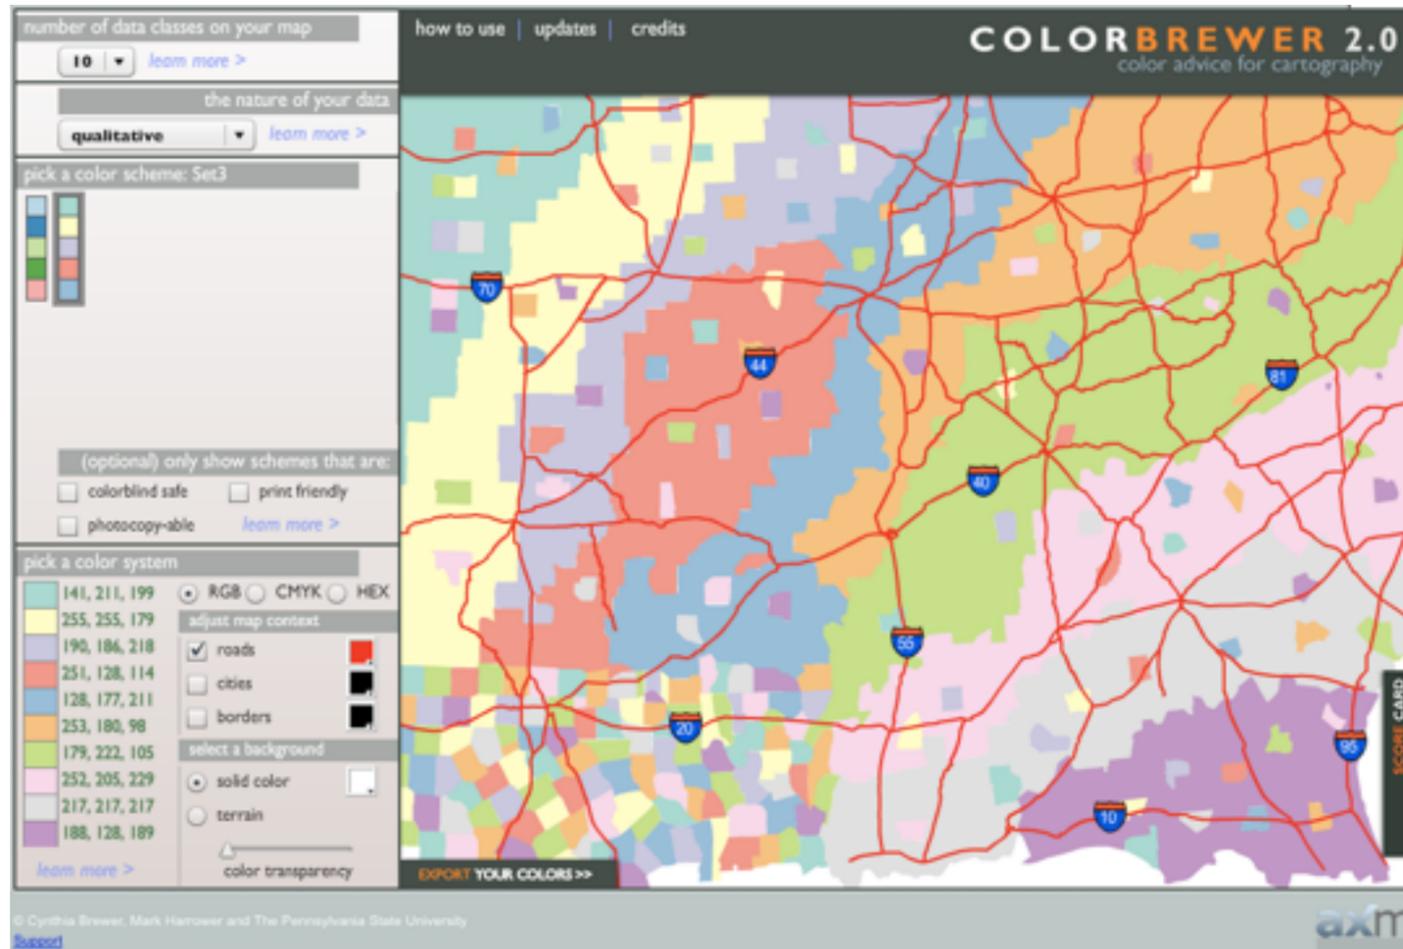


Ordered color: Rainbow is poor default

- problems
 - perceptually unordered
 - perceptually nonlinear
- benefits
 - fine-grained structure visible and nameable

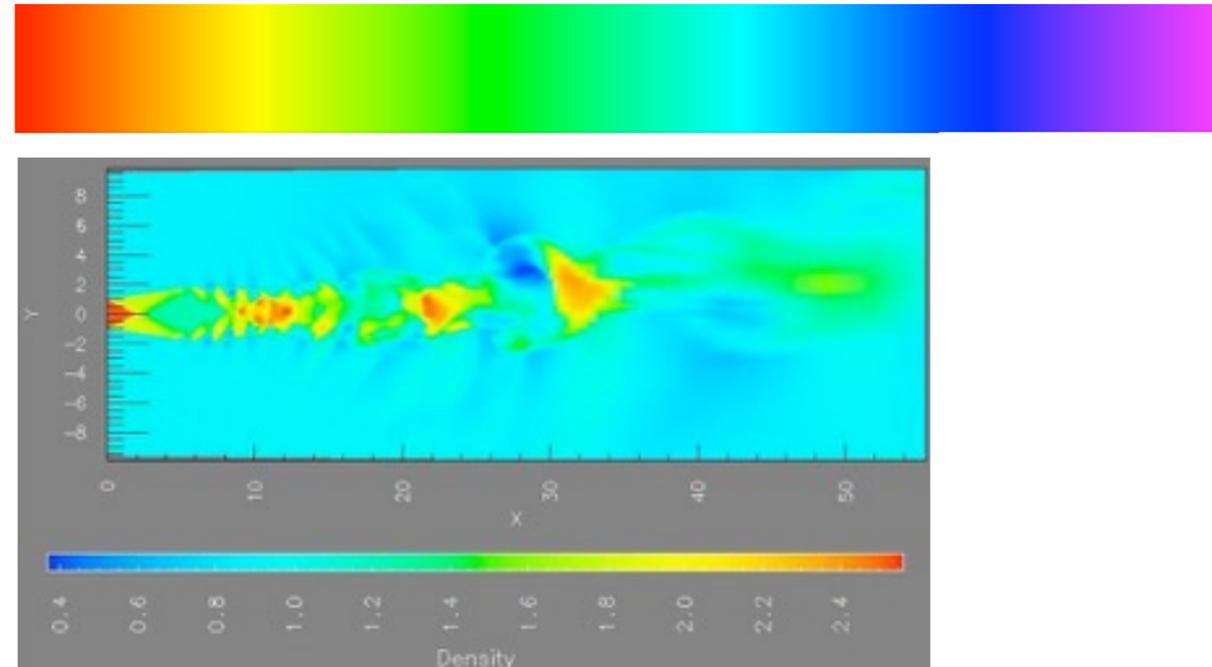


[A Rule-based Tool for Assisting Colormap Selection. Bergman, Rogowitz, and Treinish. Proc. IEEE Visualization (Vis), pp. 118–125, 1995.]

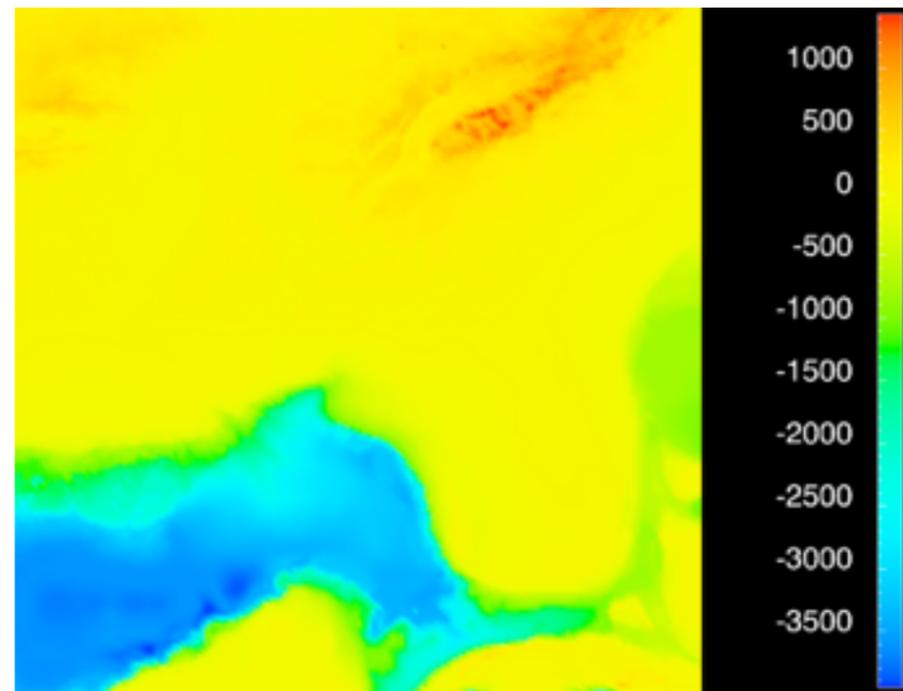


[Why Should Engineers Be Worried About Color? Treinish and Rogowitz 1998. <http://www.research.ibm.com/people/lloyd/color/color.HTM>]

Ordered color: Rainbow is poor default

- problems
 - perceptually unordered
 - perceptually nonlinear
- benefits
 - fine-grained structure visible and nameable
- alternatives
 - large-scale structure: fewer hues

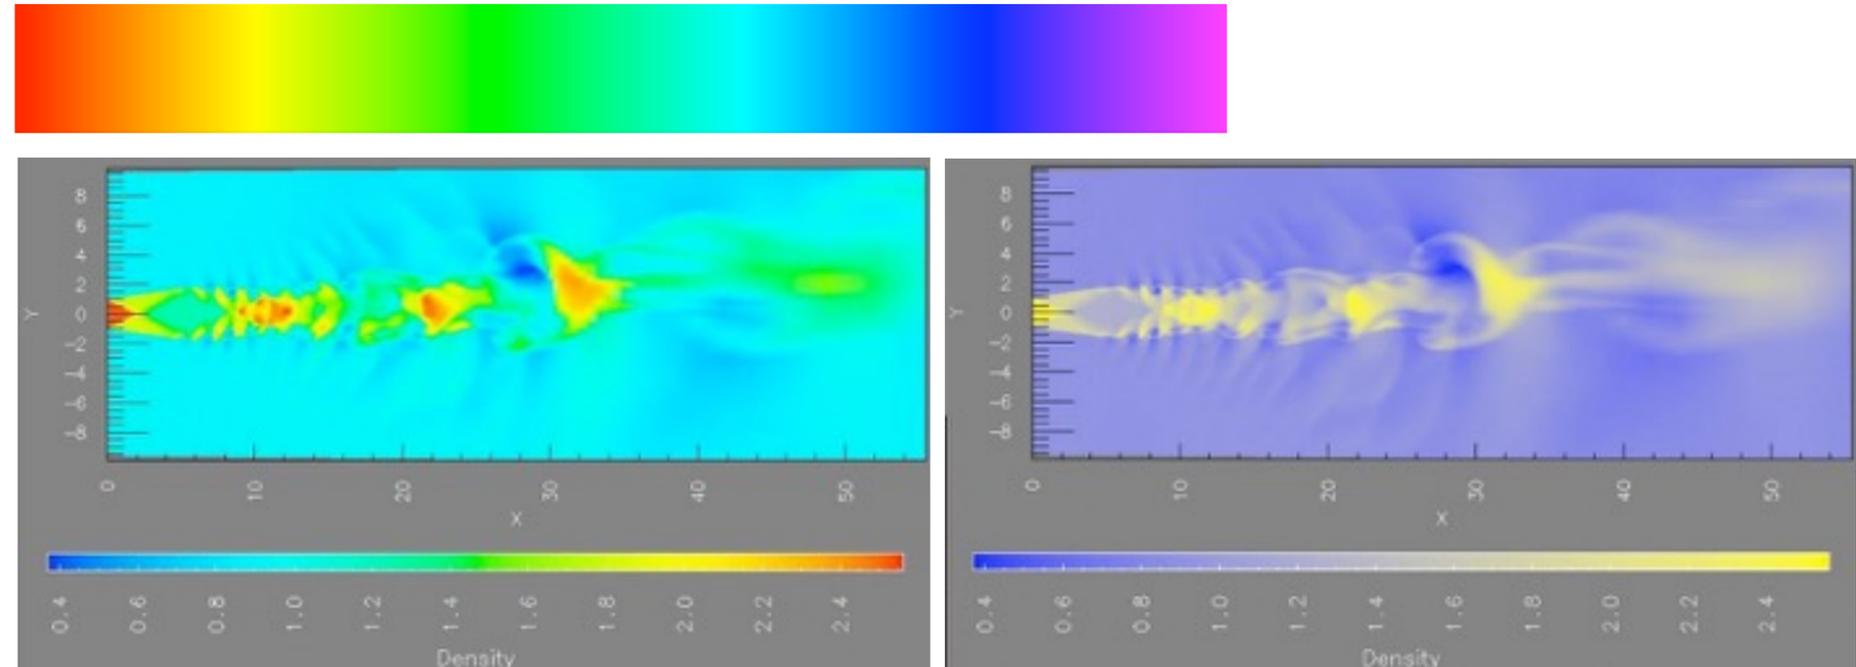


[A Rule-based Tool for Assisting Colormap Selection. Bergman, Rogowitz, and Treinish. Proc. IEEE Visualization (Vis), pp. 118–125, 1995.]

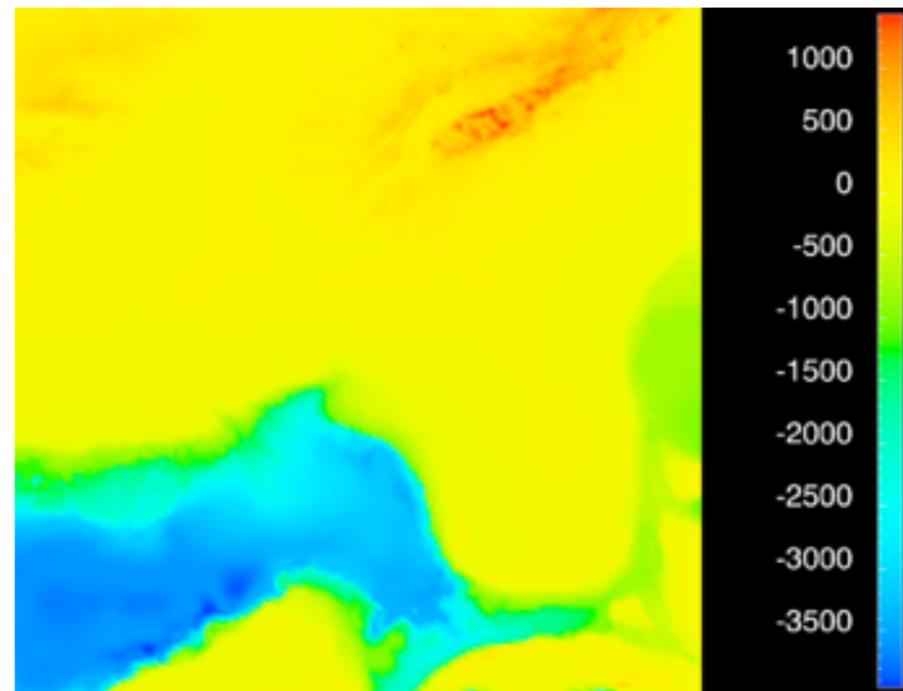


[Why Should Engineers Be Worried About Color? Treinish and Rogowitz 1998. <http://www.research.ibm.com/people/llloyd/color/color.HTM>]

Ordered color: Rainbow is poor default

- problems
 - perceptually unordered
 - perceptually nonlinear
- benefits
 - fine-grained structure visible and nameable
- alternatives
 - large-scale structure: fewer hues
 - fine structure: multiple hues with monotonically increasing luminance [eg viridis R/python]

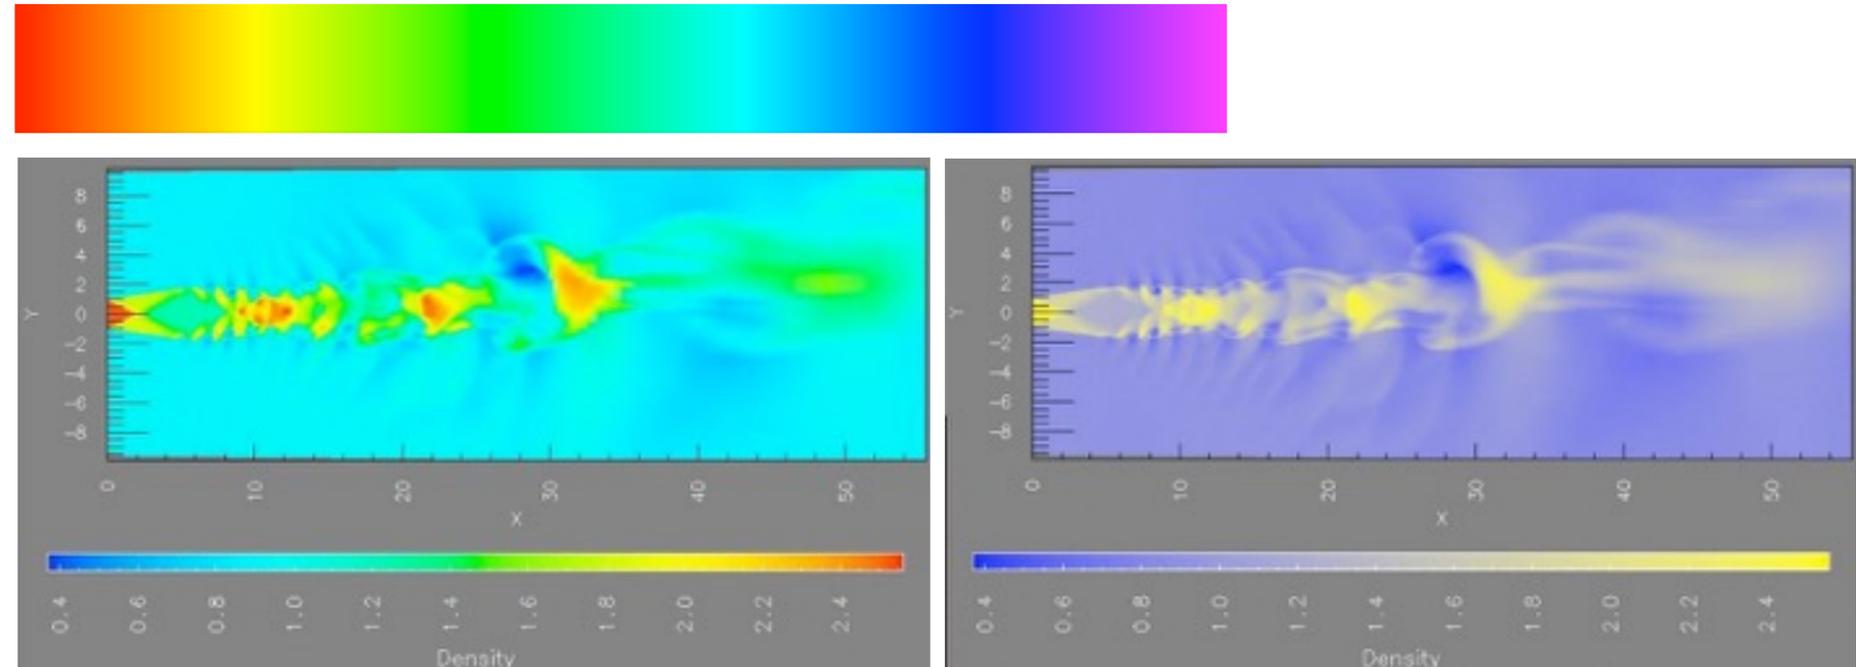


[A Rule-based Tool for Assisting Colormap Selection. Bergman, Rogowitz, and Treinish. Proc. IEEE Visualization (Vis), pp. 118–125, 1995.]

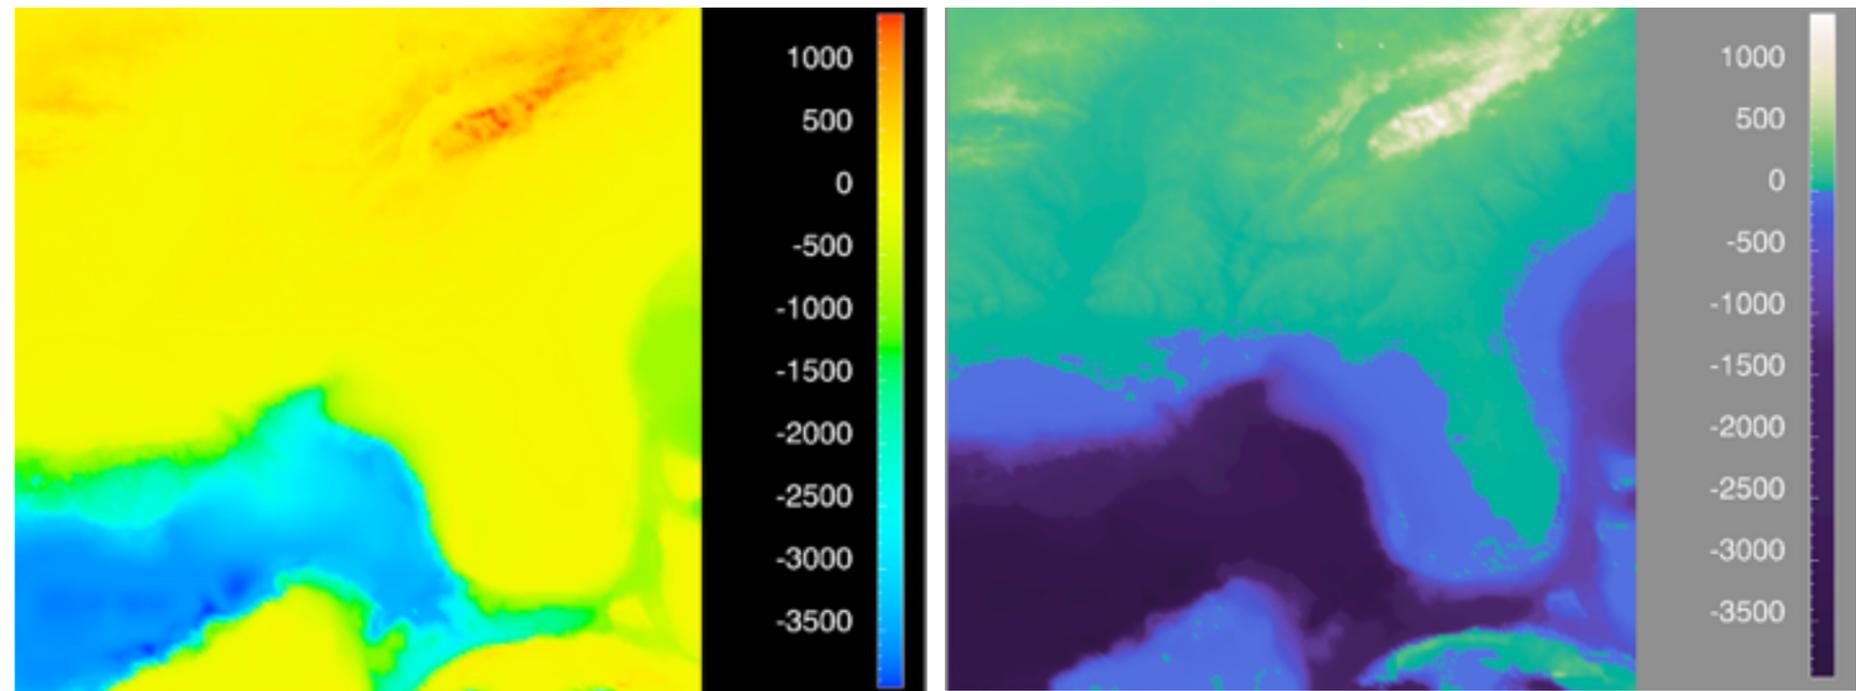


[Why Should Engineers Be Worried About Color? Treinish and Rogowitz 1998. <http://www.research.ibm.com/people/lloyd/color/color.HTM>]

Ordered color: Rainbow is poor default

- problems
 - perceptually unordered
 - perceptually nonlinear
- benefits
 - fine-grained structure visible and nameable
- alternatives
 - large-scale structure: fewer hues
 - fine structure: multiple hues with monotonically increasing luminance [eg viridis R/python]
 - segmented rainbows for binned

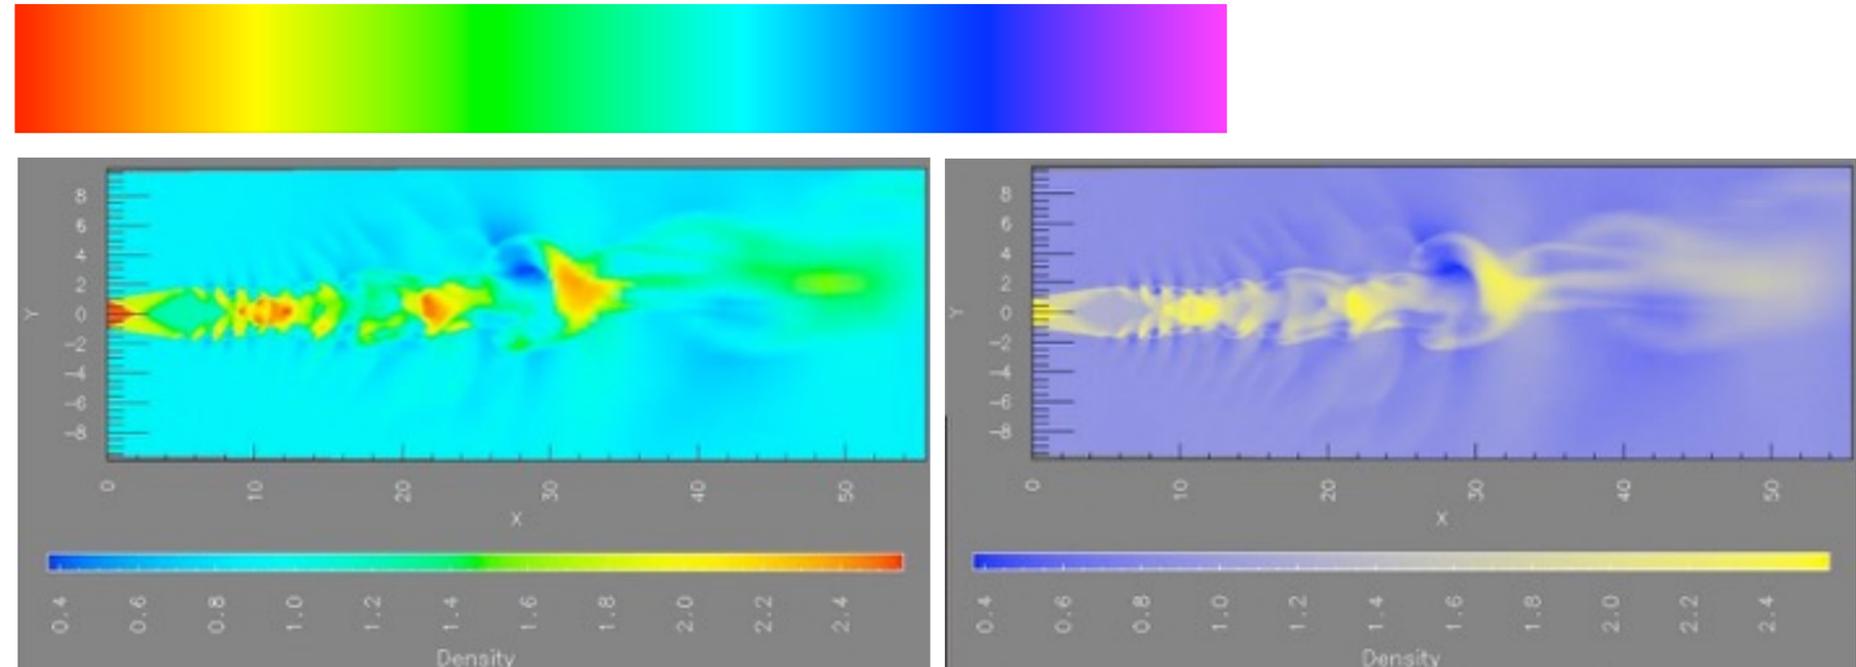

[A Rule-based Tool for Assisting Colormap Selection. Bergman, Rogowitz, and Treinish. Proc. IEEE Visualization (Vis), pp. 118–125, 1995.]

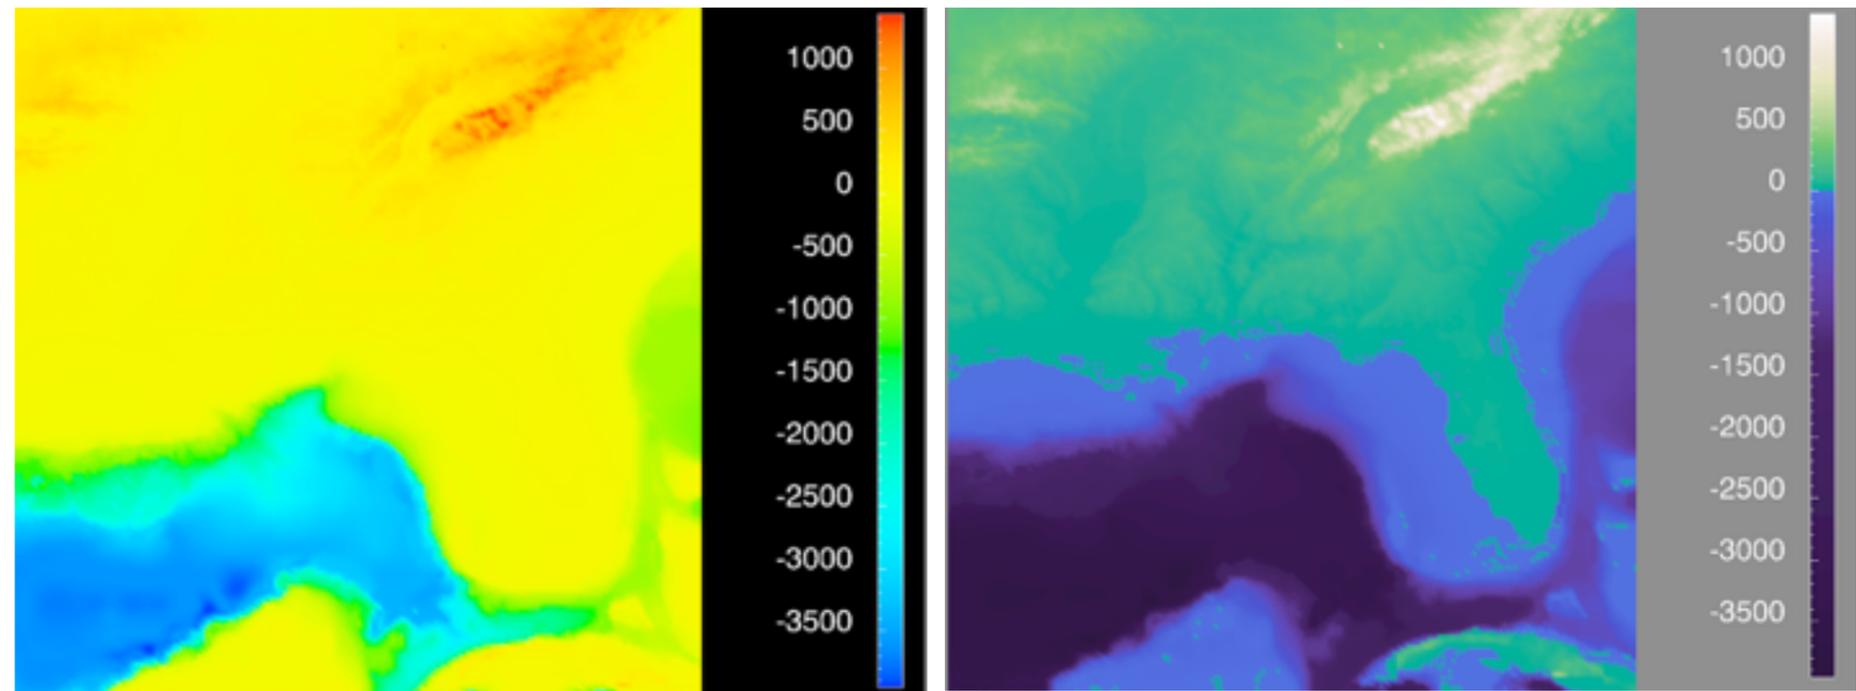


[Why Should Engineers Be Worried About Color? Treinish and Rogowitz 1998. <http://www.research.ibm.com/people/lloyd/color/color.HTM>]




[Transfer Functions in Direct Volume Rendering: Design, Interface, Interaction. Kindlmann. SIGGRAPH 2002 Course Notes]

Viridis

- colorful, perceptually uniform, colorblind-safe, monotonically increasing luminance

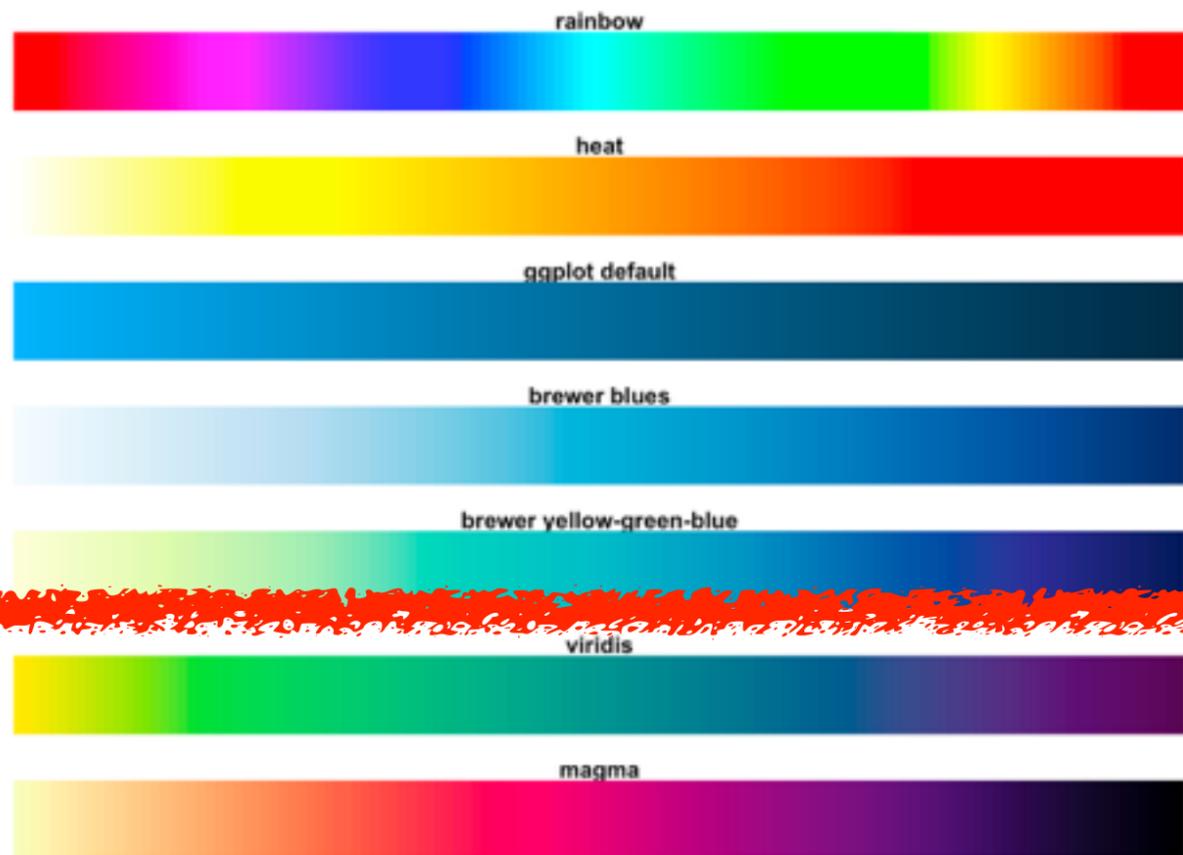

<https://cran.r-project.org/web/packages/viridis/vignettes/intro-to-viridis.html>

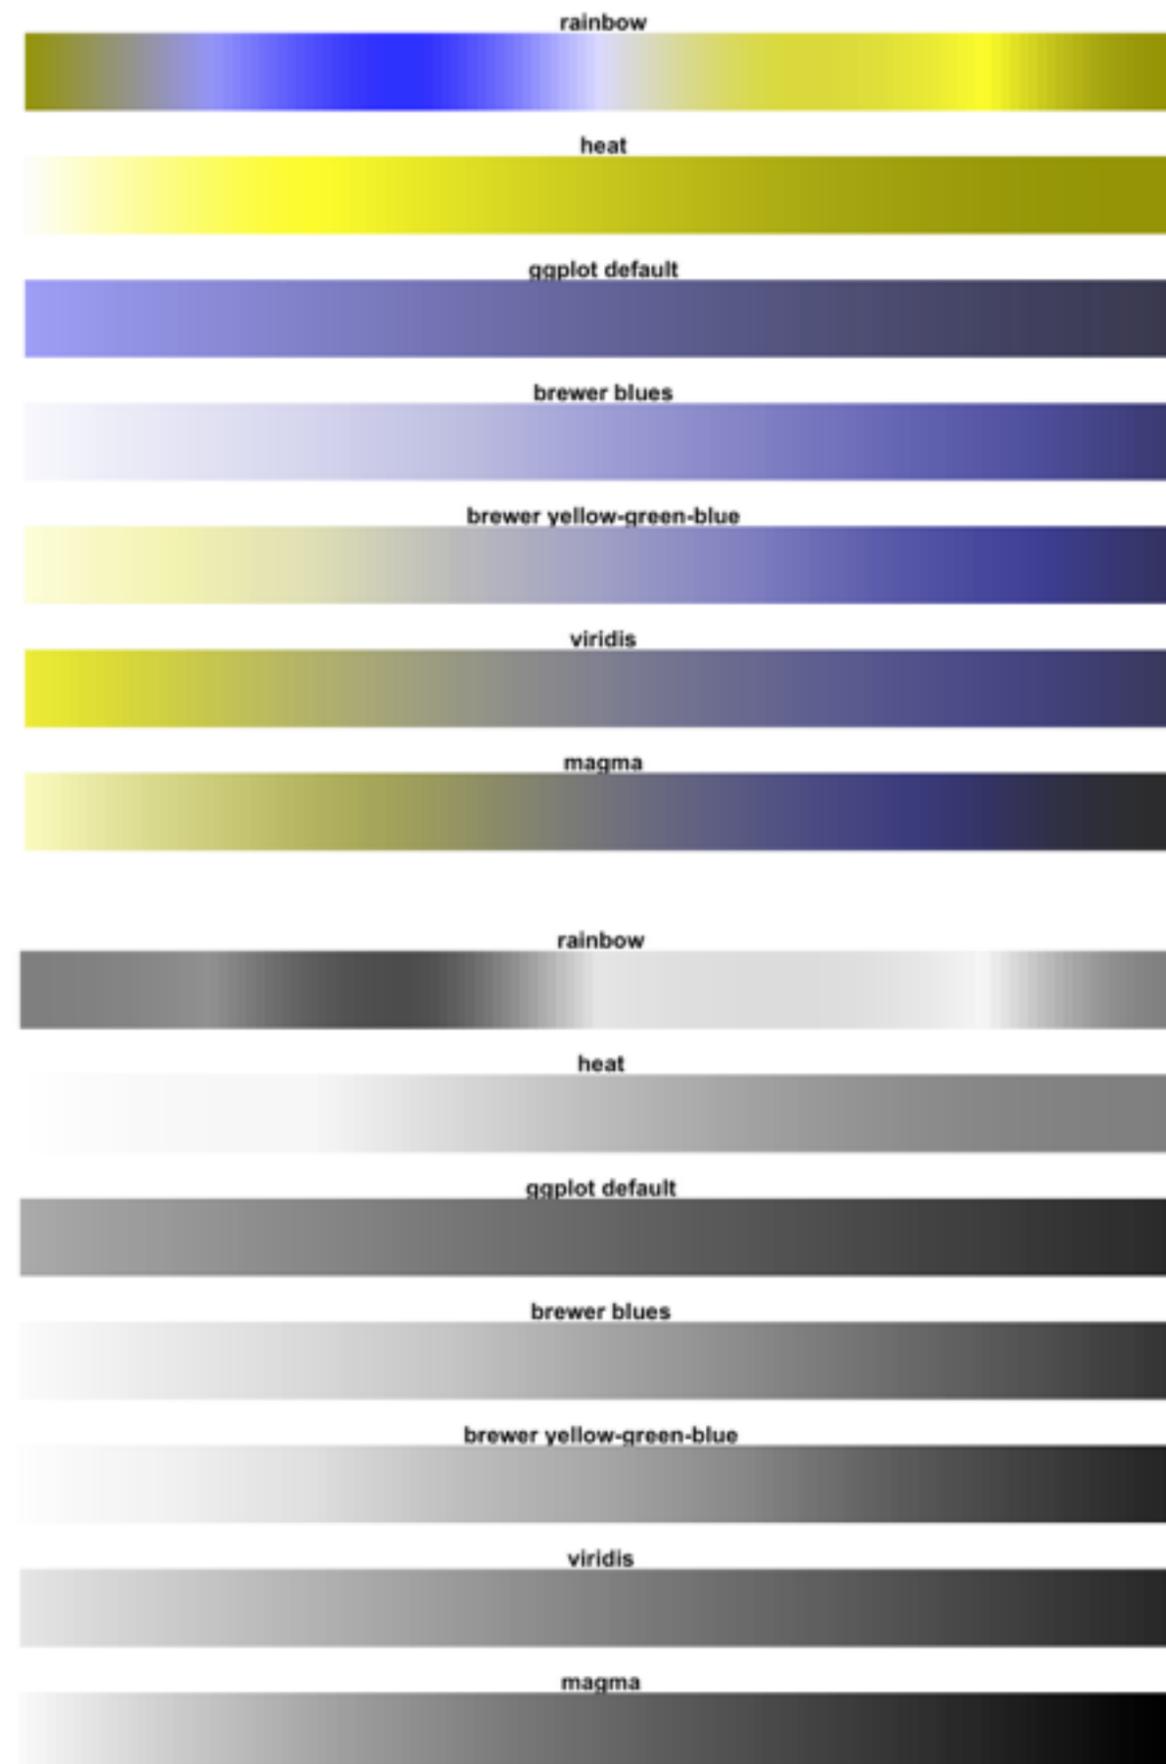

Map other channels

- size
 - length accurate, 2D area ok, 3D volume poor
- angle
 - nonlinear accuracy
 - horizontal, vertical, exact diagonal
- shape
 - complex combination of lower-level primitives
 - many bins
- motion
 - highly separable against static
 - binary: great for highlighting
 - use with care to avoid irritation

➔ Size, Angle, Curvature, ...

➔ Length



➔ Angle



➔ Area



➔ Curvature



➔ Volume



➔ Shape



➔ Motion


➔ Motion
*Direction, Rate,
Frequency, ...*




Angle



Sequential ordered
line mark or arrow glyph

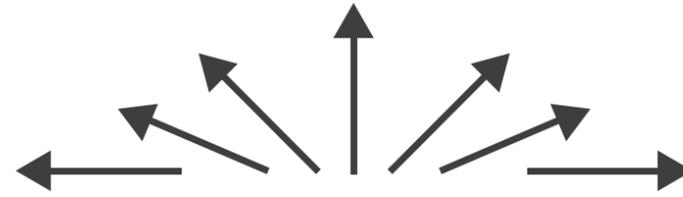

Diverging ordered
arrow glyph

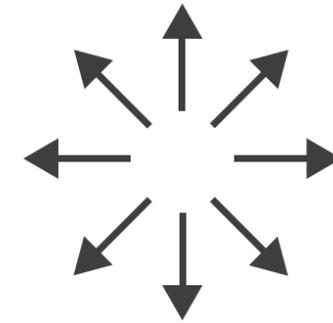

Cyclic ordered
arrow glyph

Further reading

- Visualization Analysis and Design. Munzner. AK Peters Visualization Series, CRC Press, 2014
 - Chap 10: Map Color and Other Channels*
- ColorBrewer, Brewer.
 - <http://www.colorbrewer2.org>
- *Color In Information Display*. Stone. IEEE Vis Course Notes, 2006.
 - <http://www.stonesc.com/Vis06>
- A Field Guide to Digital Color. Stone. AK Peters, 2003.
- *Rainbow Color Map (Still) Considered Harmful*. Borland and Taylor. IEEE Computer Graphics and Applications 27:2 (2007), 14–17.
- Visual Thinking for Design. Ware. Morgan Kaufmann, 2008.
- Information Visualization: Perception for Design, 3rd edition. Ware. Morgan Kaufmann / Academic Press, 2004.
- <https://cran.r-project.org/web/packages/viridis/vignettes/intro-to-viridis.html>

Outline

- **Session 1 8:30-10:00am**
Visualization Analysis Framework
 - Introduction: Definitions
 - Analysis: What, Why, How
 - Marks and Channels
- **Session 2 10:30am-12:00pm**
Spatial Layout
 - Arrange Tables
 - Arrange Spatial Data
 - Arrange Networks and Trees
- **Session 3 1:00-2:30pm**
Color & Interaction
 - Map Color
 - **Manipulate: Change, Select, Navigate**
 - Facet: Juxtapose, Partition, Superimpose
- **Session 4 3:00-4:30pm**
Guidelines and Examples
 - Reduce: Filter, Aggregate
 - Rules of Thumb
 - Q&A

How?

Encode

→ Arrange

→ Express



→ Separate



→ Order



→ Align



→ Use



→ Map

from **categorical** and **ordered** attributes

→ Color

→ Hue



→ Saturation



→ Luminance



→ Size, Angle, Curvature, ...



→ Shape




→ Motion

Direction, Rate, Frequency, ...



Manipulate

→ Change



→ Select



→ Navigate




Facet


→ Juxtapose



→ Partition

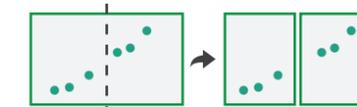


→ Superimpose

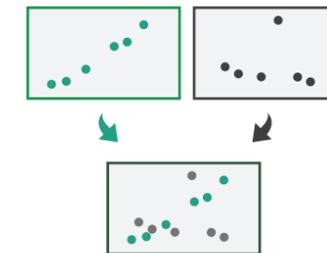


Reduce

→ Filter



→ Aggregate

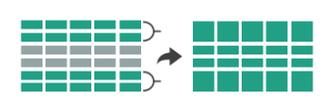

→ Embed



What?

Why?

How?

How to handle complexity: 1 previous strategy + 3 more

→ *Derive*




Manipulate


→ Change



→ Select




→ Navigate




Facet

→ Juxtapose

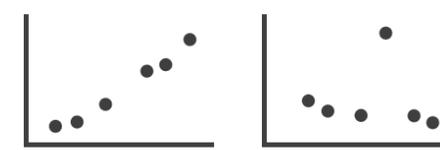

→ Partition

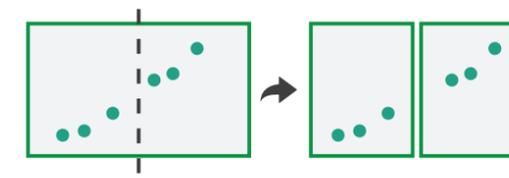


→ Superimpose




Reduce

→ Filter



→ Aggregate

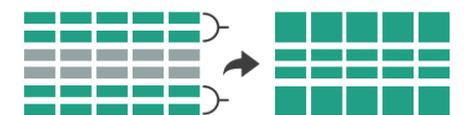

→ Embed




- derive new data to show within view
- change view over time
- facet across multiple views
- reduce items/attributes within single view

Manipulate

→ Change over Time




→ Select

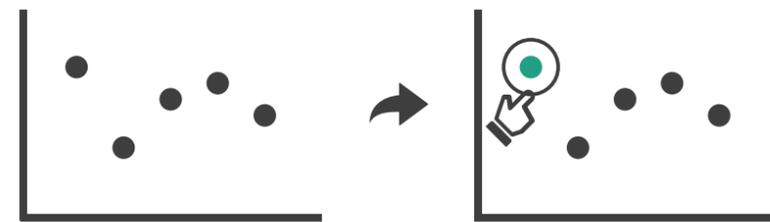

→ Navigate

→ Item Reduction


→ Zoom
Geometric or *Semantic*

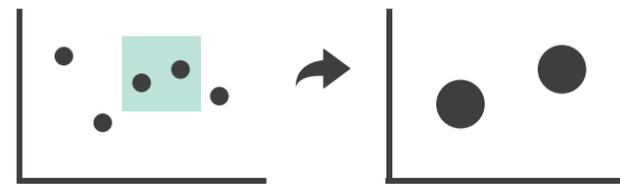

→ Pan/Translate




→ Constrained

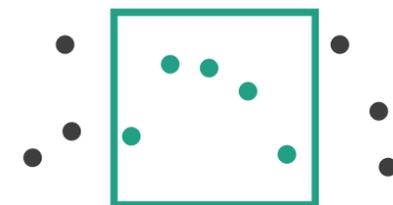


→ Attribute Reduction


→ Slice

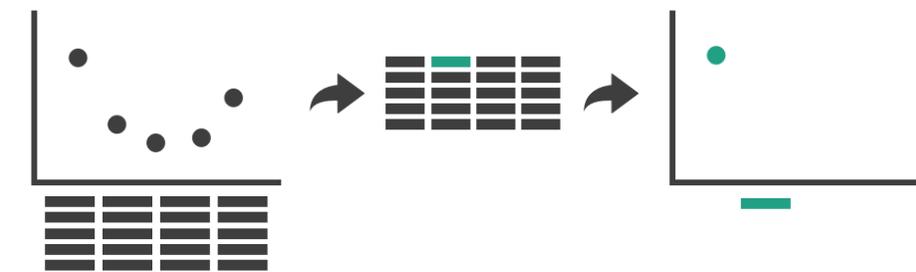

→ Cut

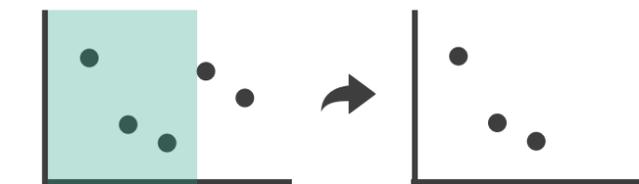

→ Project

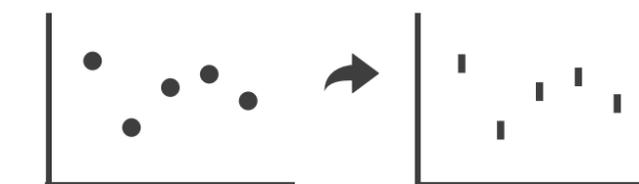





Change over time

- change any of the other choices
 - encoding itself
 - parameters
 - arrange: rearrange, reorder
 - aggregation level, what is filtered...

 - interaction entails change

Idiom: Re-encode

System: Tableau

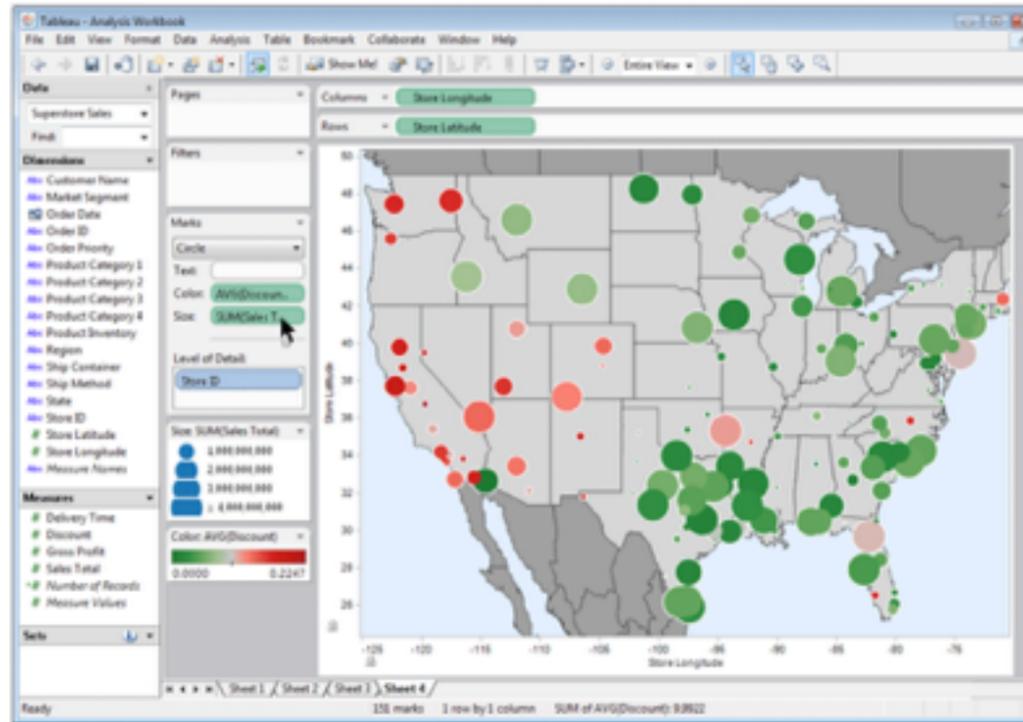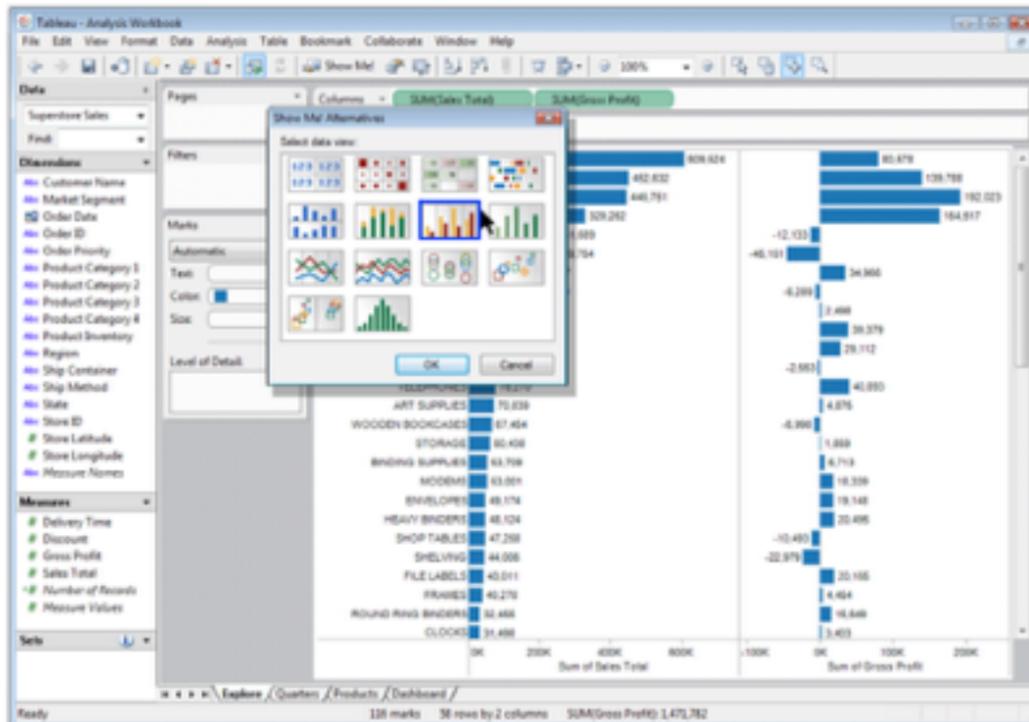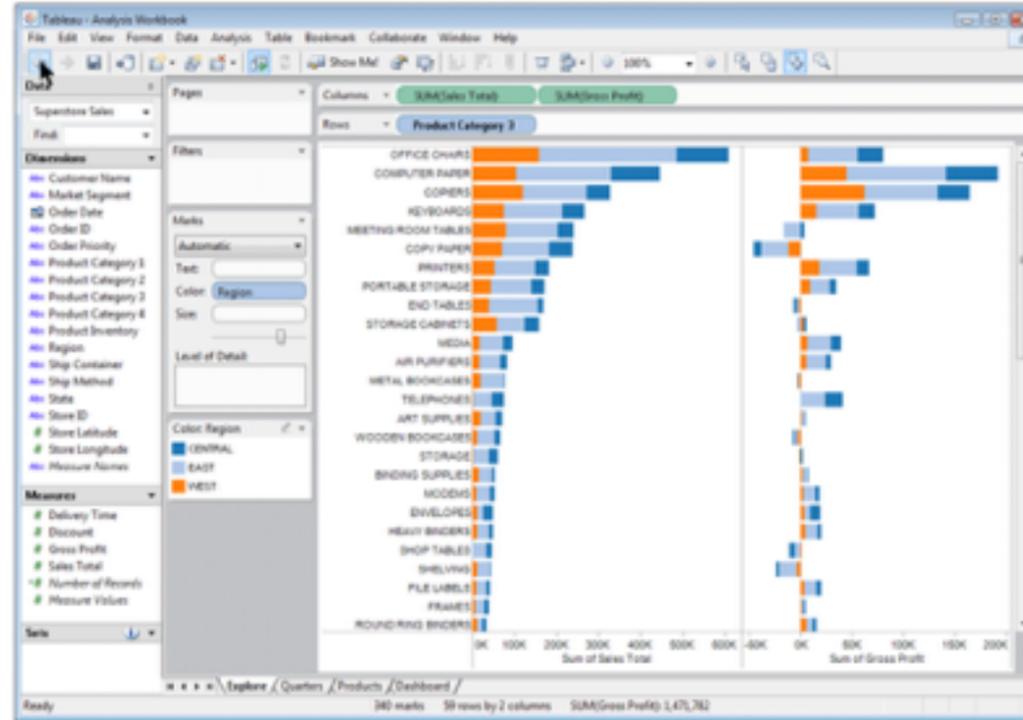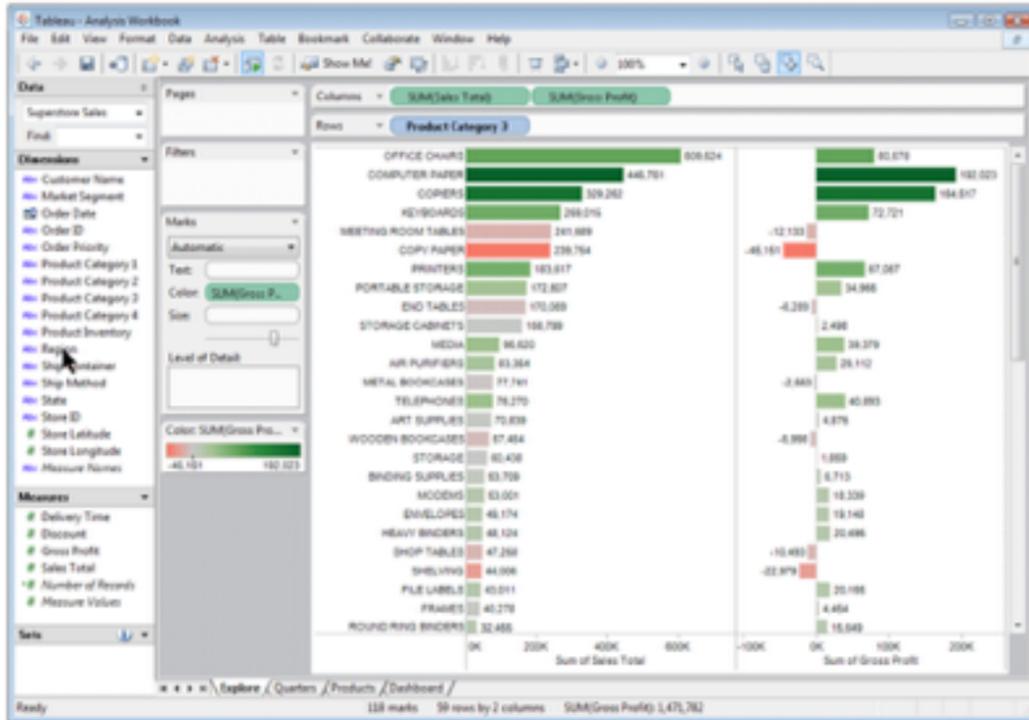


made using Tableau, <http://tableausoftware.com>

Idiom: Reorder

System: LineUp

- data: tables with many attributes
- task: compare rankings

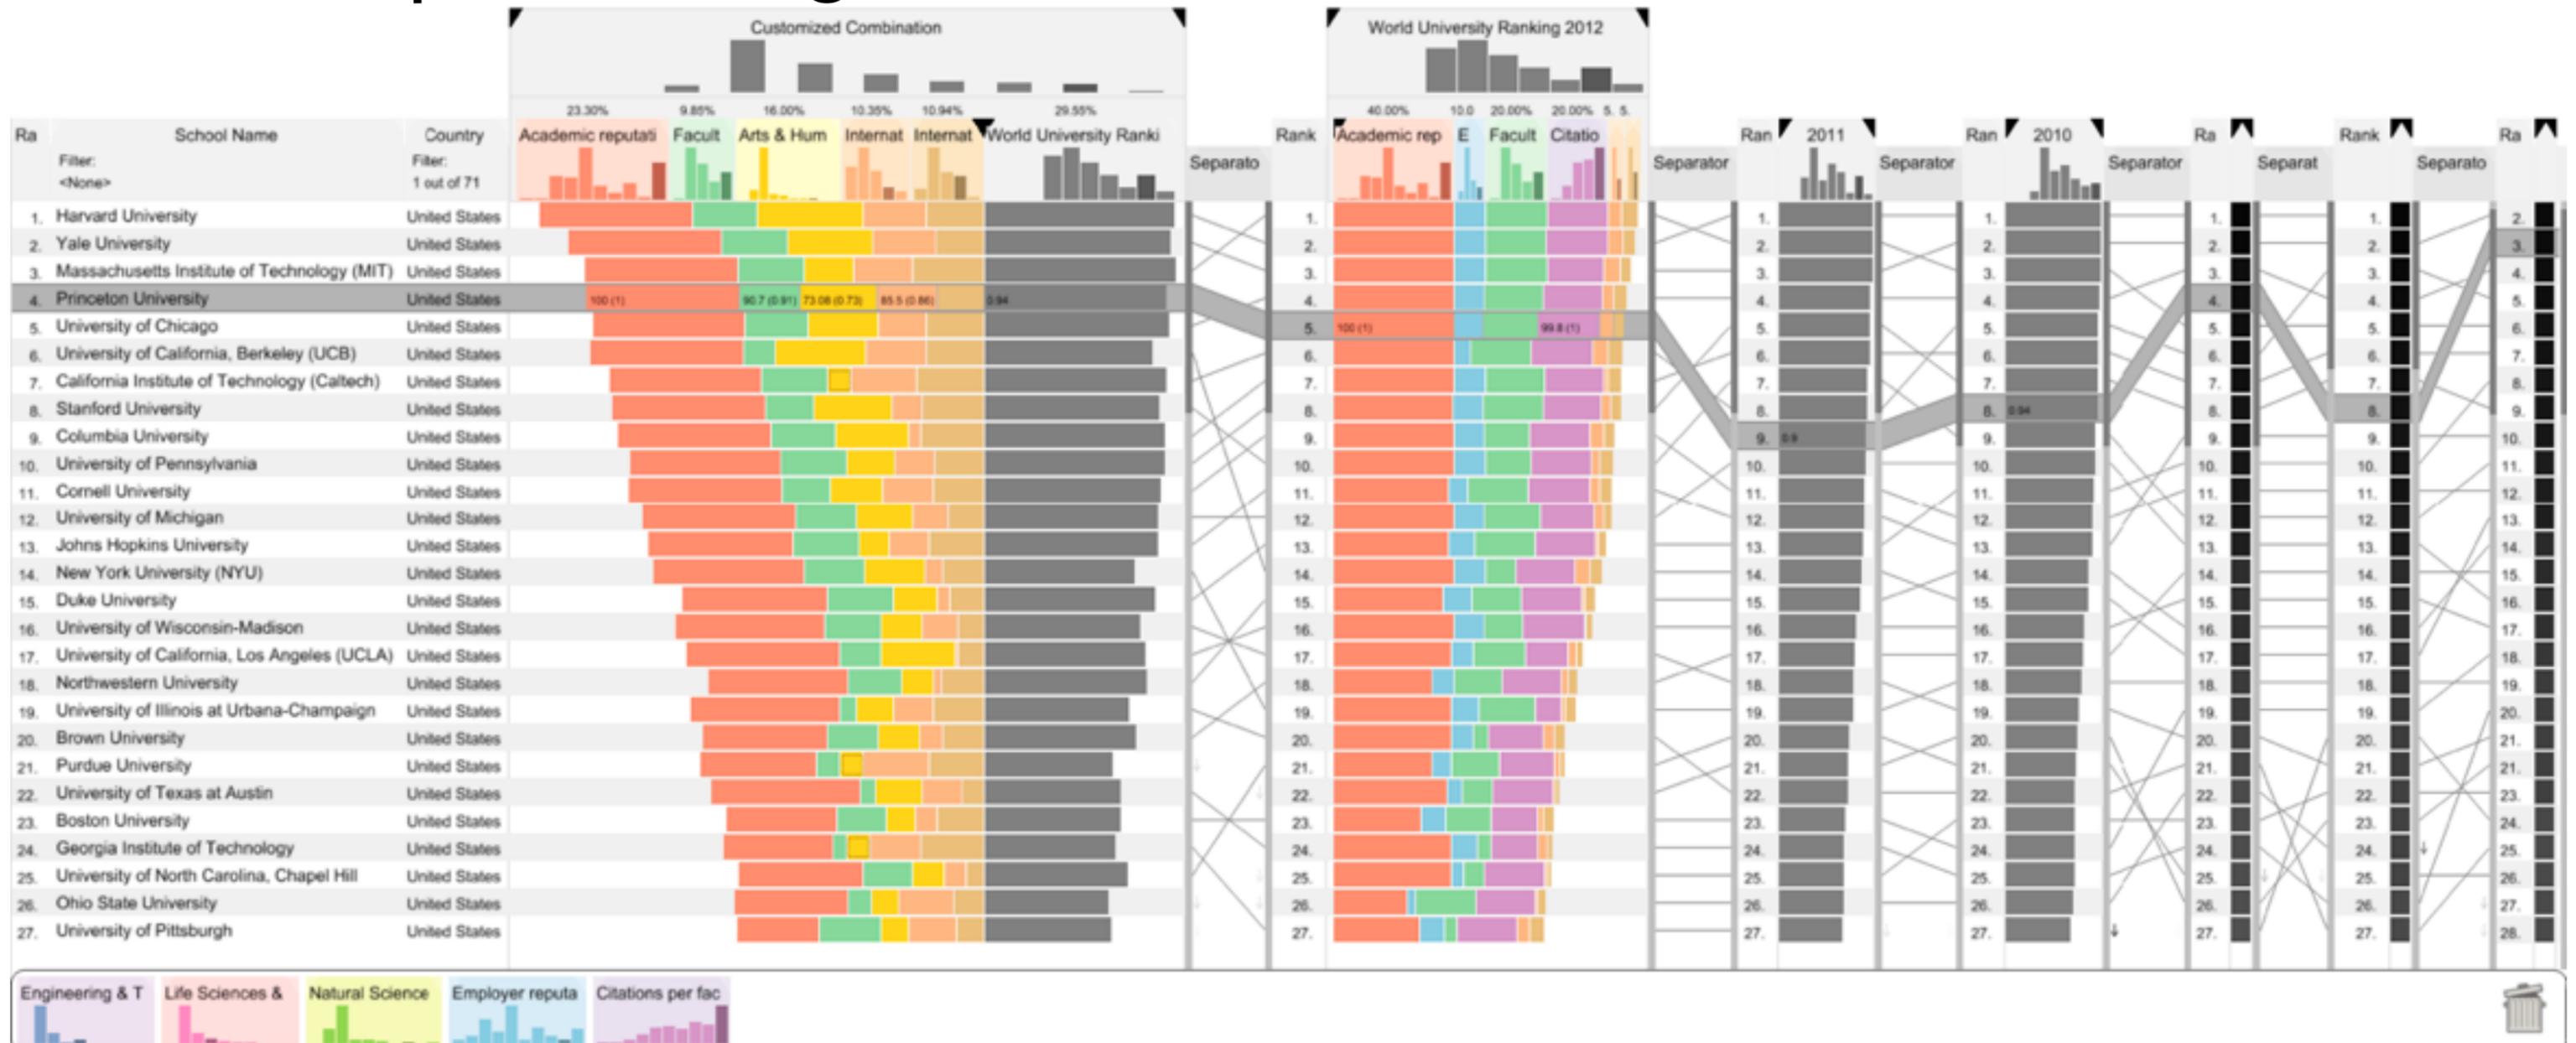


[LineUp: Visual Analysis of Multi-Attribute Rankings. Gratzl, Lex, Gehlenborg, Pfister, and Streit. IEEE Trans. Visualization and Computer Graphics (Proc. InfoVis 2013) 19:12 (2013), 2277–2286.]

Idiom: **Realign**

- stacked bars
 - easy to compare
 - first segment
 - total bar
- align to different segment
 - supports flexible comparison


System: **LineUp**

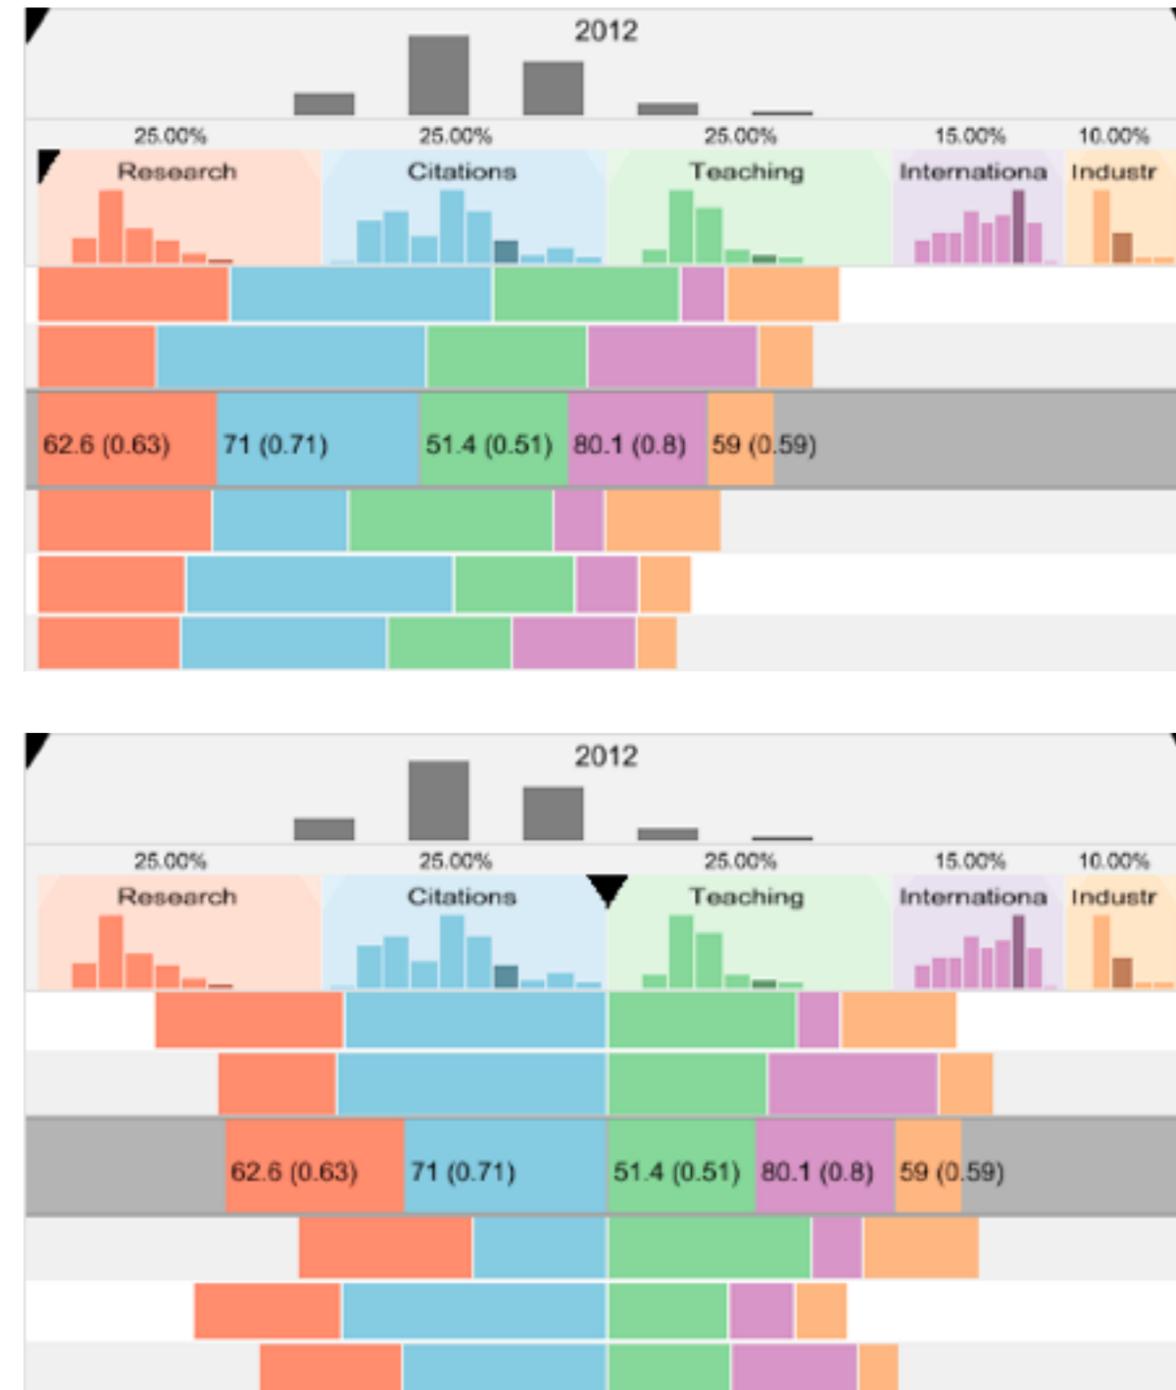

[LineUp: Visual Analysis of Multi-Attribute Rankings. Gratzl, Lex, Gehlenborg, Pfister, and Streit. IEEE Trans. Visualization and Computer Graphics (Proc. InfoVis 2013) 19:12 (2013), 2277–2286.]

Idiom: **Animated transitions**

- smooth transition from one state to another
 - alternative to jump cuts
 - support for item tracking when amount of change is limited
- example: multilevel matrix views
- example: animated transitions in statistical data graphics
 - <https://vimeo.com/19278444>

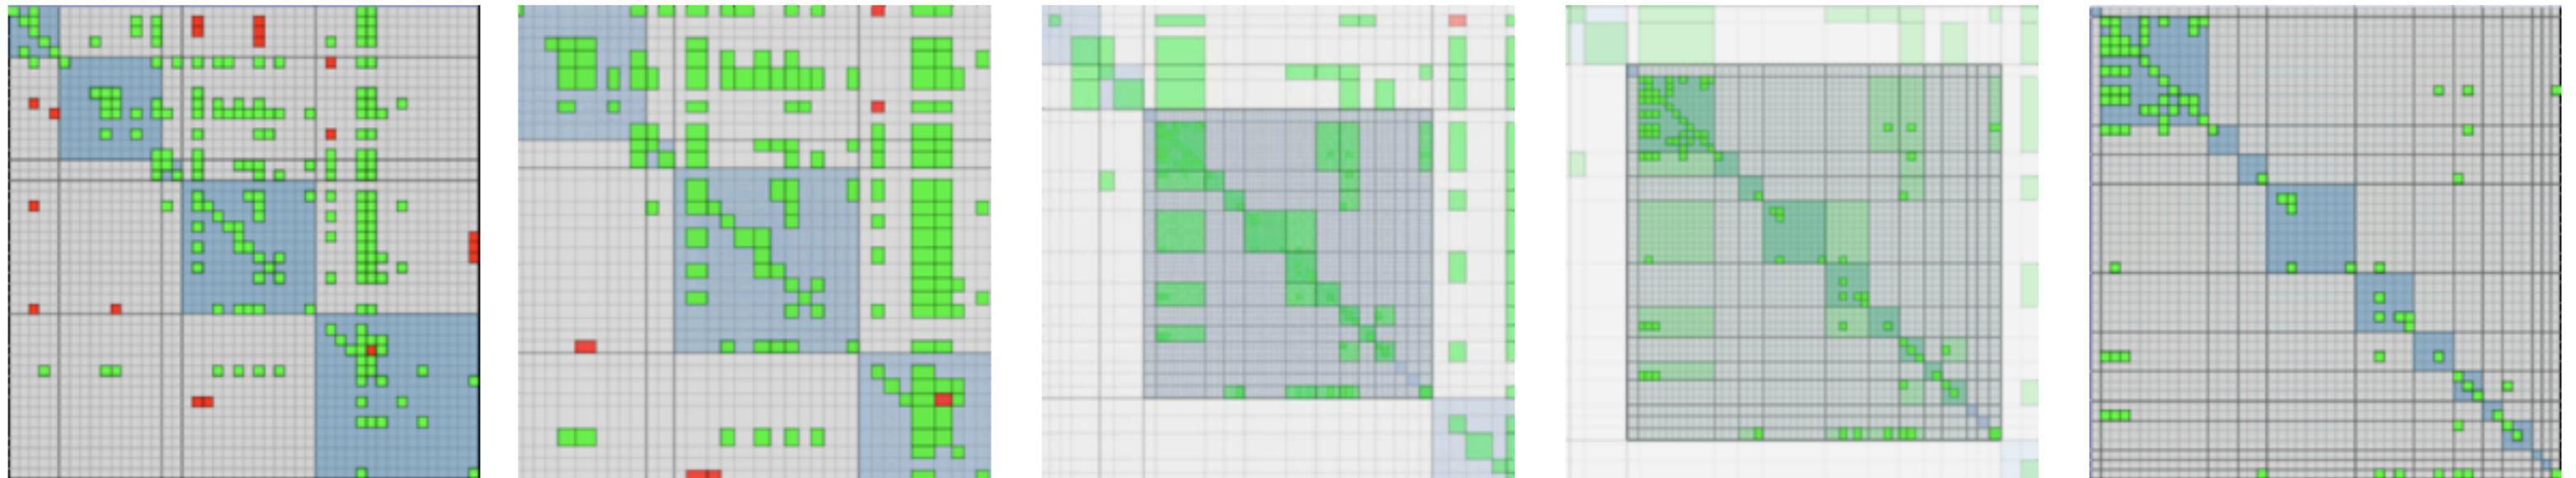


[Using Multilevel Call Matrices in Large Software Projects. van Ham. Proc. IEEE Symp. Information Visualization (InfoVis), pp. 227–232, 2003.]

Select and highlight

- selection: basic operation for most interaction
- design choices
 - how many selection types?
 - click vs hover: heavyweight, lightweight
 - primary vs secondary: semantics (eg source/target)
- highlight: change visual encoding for selection targets
 - color
 - limitation: existing color coding hidden
 - other channels (eg motion)
 - add explicit connection marks between items

➔ Select

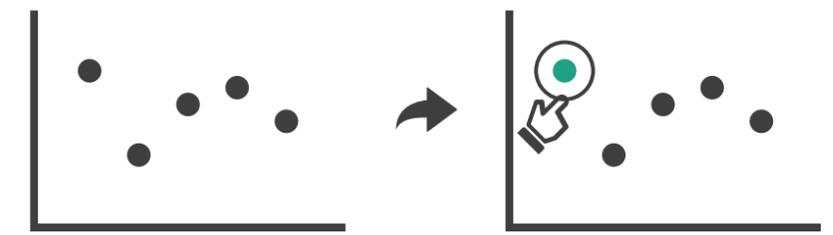

Navigate: Changing item visibility


- change viewpoint
 - changes which items are visible within view
 - camera metaphor
 - zoom
 - geometric zoom: familiar semantics
 - semantic zoom: adapt object representation based on available pixels
 - » dramatic change, or more subtle one
 - pan/translate
 - rotate
 - especially in 3D
 - constrained navigation
 - often with animated transitions
 - often based on selection set

➔ Navigate


➔ Item Reduction

➔ Zoom


Geometric or *Semantic*

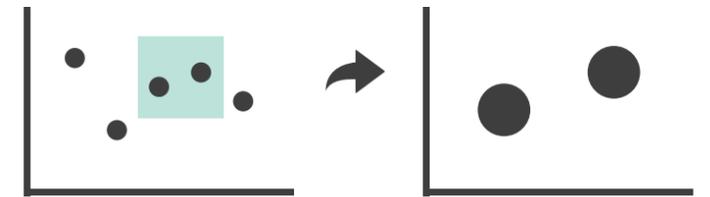

➔ Pan/Translate

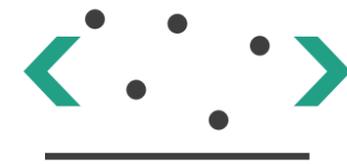


➔ Constrained

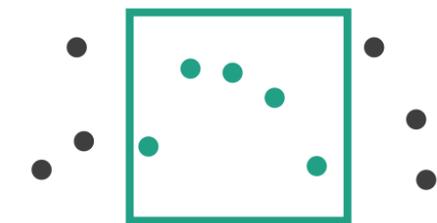

Idiom: Semantic zooming

System: LiveRAC



- visual encoding change
 - colored box
 - sparkline
 - simple line chart
 - full chart: axes and tickmarks

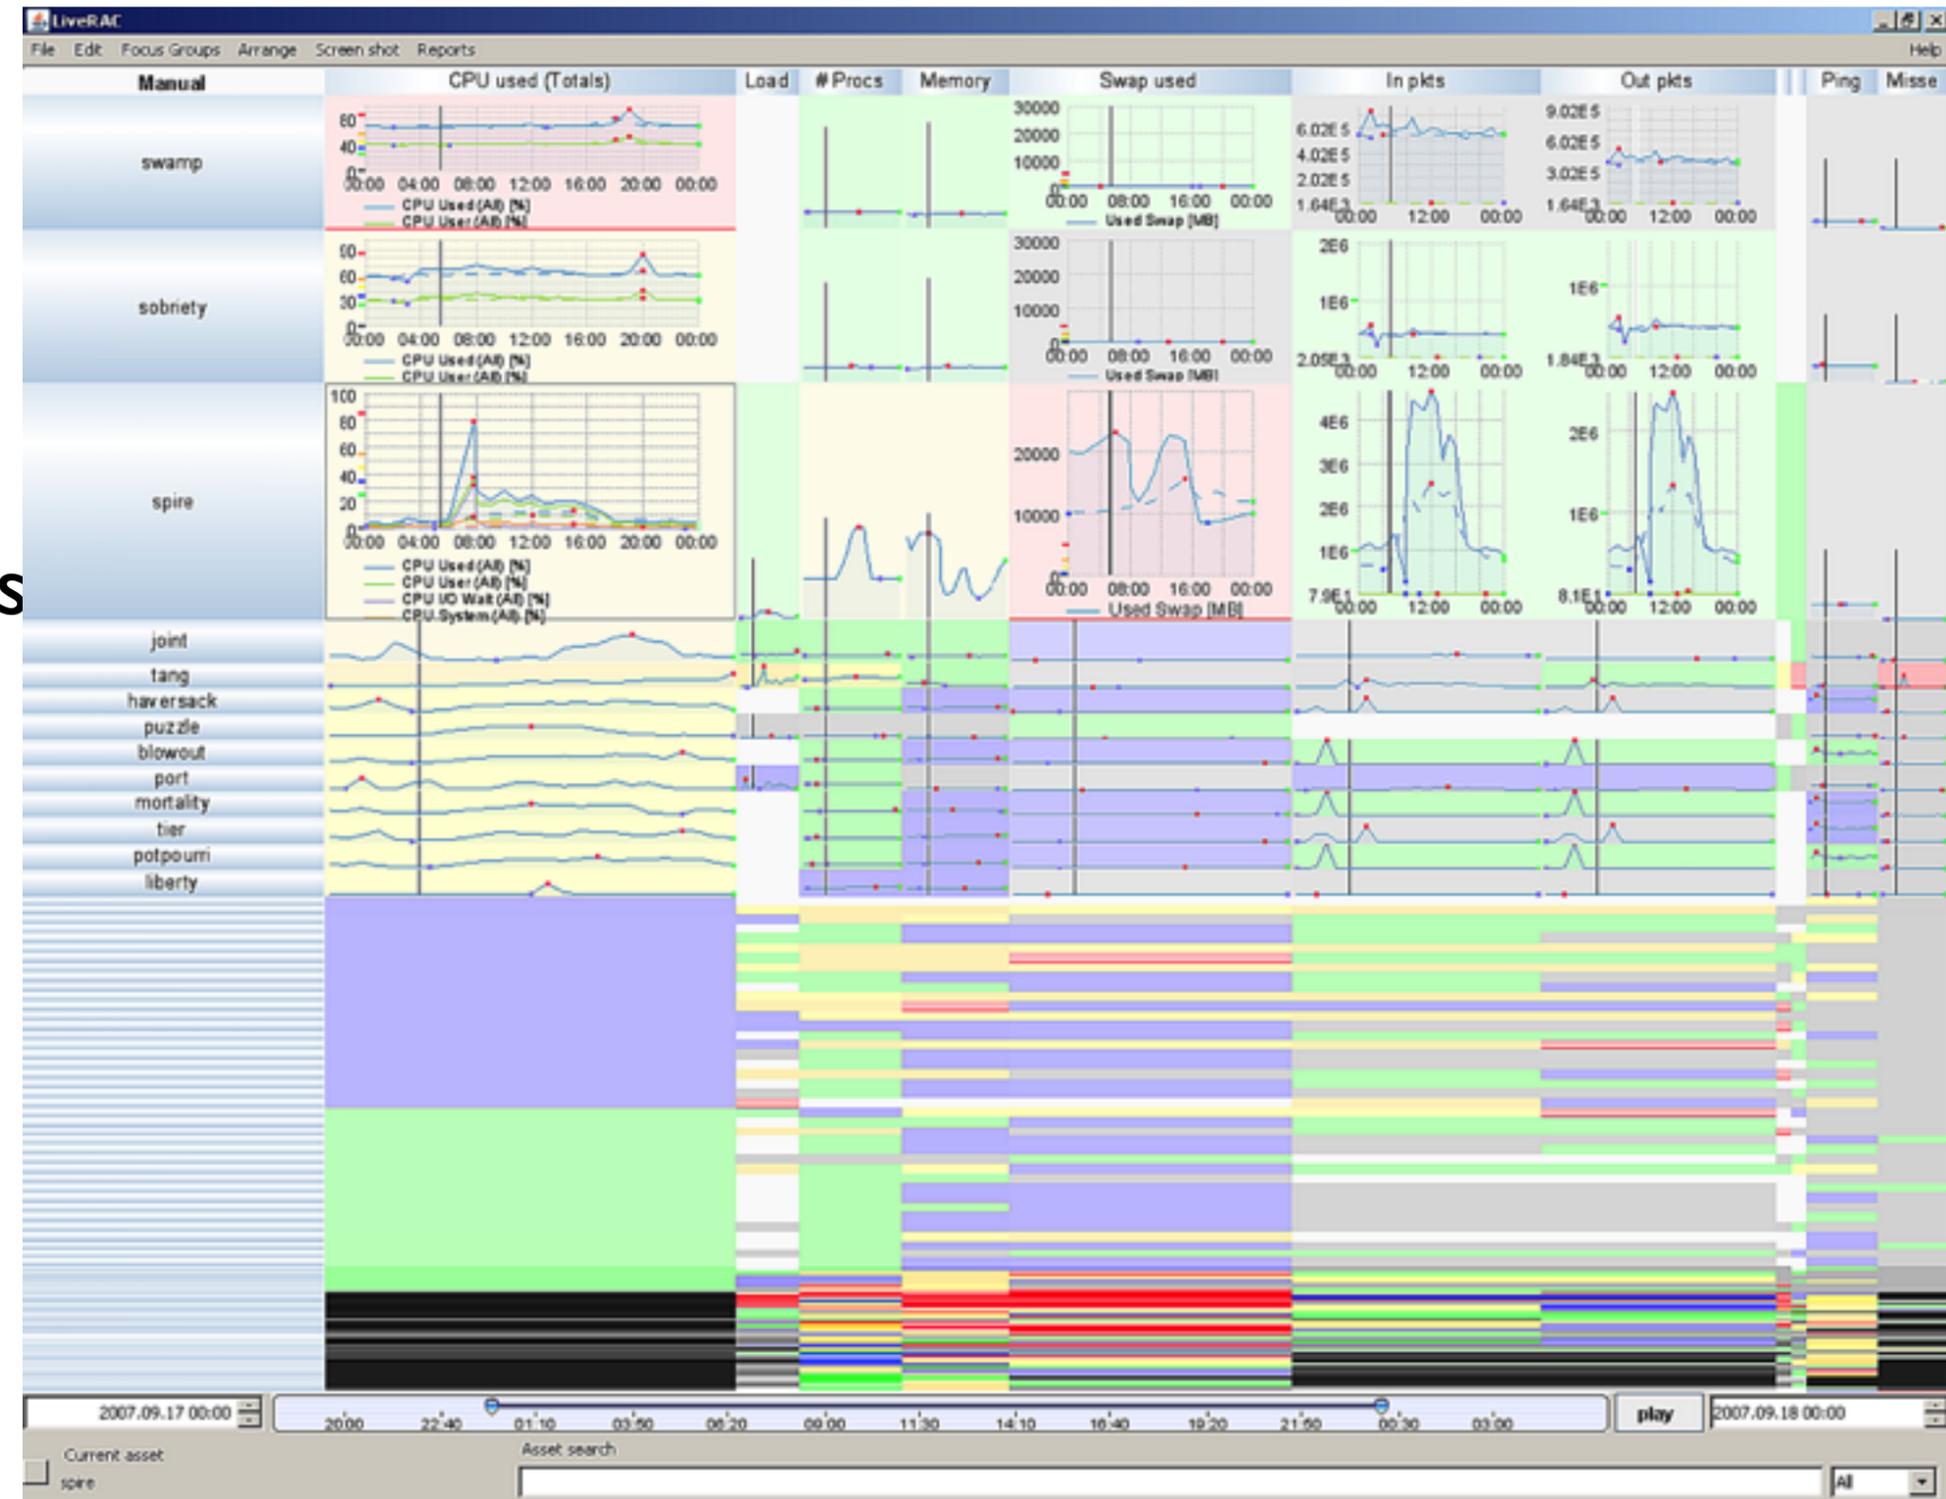

[LiveRAC - Interactive Visual Exploration of System Management Time-Series Data. McLachlan, Munzner, Koutsofios, and North. Proc. ACM Conf. Human Factors in Computing Systems (CHI), pp. 1483–1492, 2008.]


Navigate: Reducing attributes

- continuation of camera metaphor
 - slice
 - show only items matching specific value for given attribute: slicing plane
 - axis aligned, or arbitrary alignment
 - cut
 - show only items on far side of plane from camera
 - project
 - change mathematics of image creation
 - orthographic
 - perspective
 - many others: Mercator, cabinet, ...

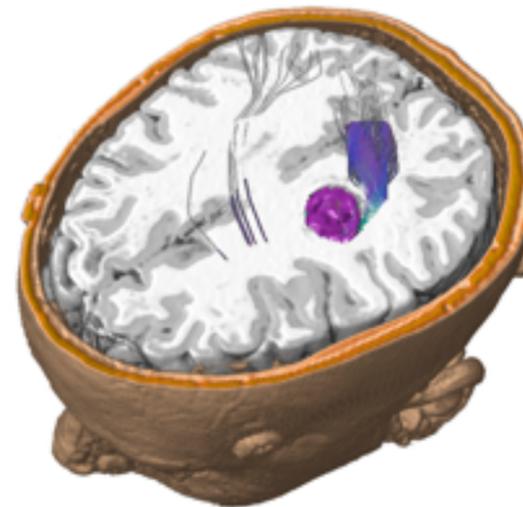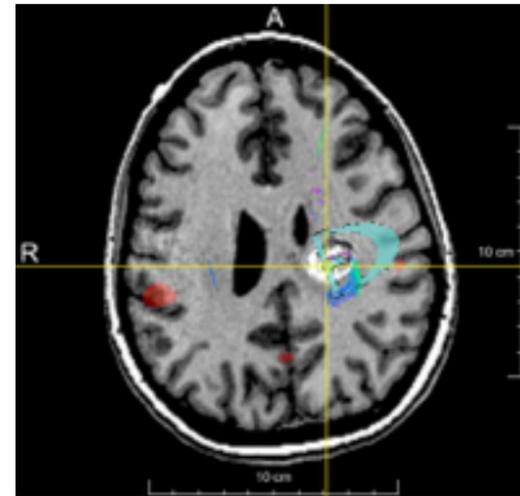


→ Attribute Reduction


→ *Slice*

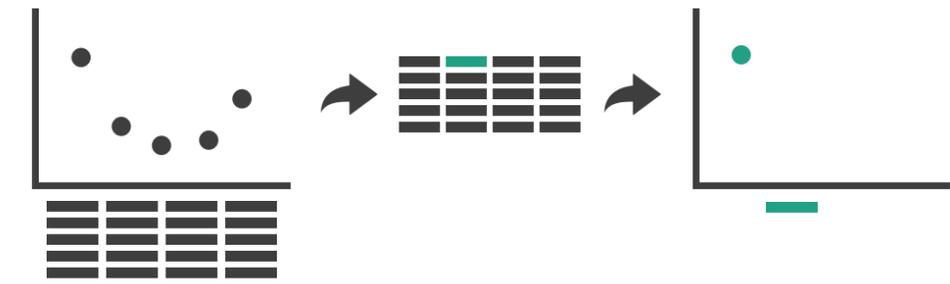

→ *Cut*

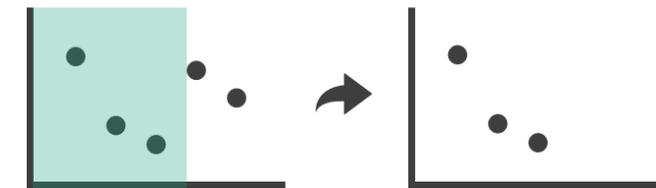

→ *Project*

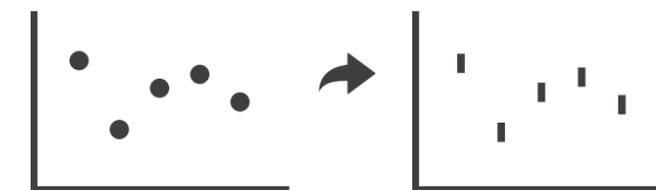

Further reading


- Visualization Analysis and Design. Munzner. AK Peters Visualization Series, CRC Press, 2014.
 - Chap 11: Manipulate View*
- *Animated Transitions in Statistical Data Graphics*. Heer and Robertson. IEEE Trans. on Visualization and Computer Graphics (Proc. InfoVis07) 13:6 (2007), 1240–1247.
- *Selection: 524,288 Ways to Say “This is Interesting”*. Wills. Proc. IEEE Symp. Information Visualization (InfoVis), pp. 54–61, 1996.
- *Smooth and efficient zooming and panning*. van Wijk and Nuij. Proc. IEEE Symp. Information Visualization (InfoVis), pp. 15–22, 2003.
- *Starting Simple - adding value to static visualisation through simple interaction*. Dix and Ellis. Proc. Advanced Visual Interfaces (AVI), pp. 124–134, 1998.

Outline


- **Session 1 8:30-10:00am**
Visualization Analysis Framework
 - Introduction: Definitions
 - Analysis: What, Why, How
 - Marks and Channels
- **Session 2 10:30am-12:00pm**
Spatial Layout
 - Arrange Tables
 - Arrange Spatial Data
 - Arrange Networks and Trees
- **Session 3 1:00-2:30pm**
Color & Interaction
 - Map Color
 - Manipulate: Change, Select, Navigate
 - **Facet: Juxtapose, Partition, Superimpose**
- **Session 4 3:00-4:30pm**
Color & Interaction
 - Reduce: Filter, Aggregate
 - Rules of Thumb
 - Q&A

Facet


→ Juxtapose

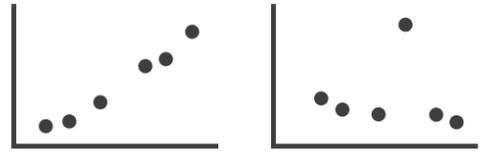

→ Partition

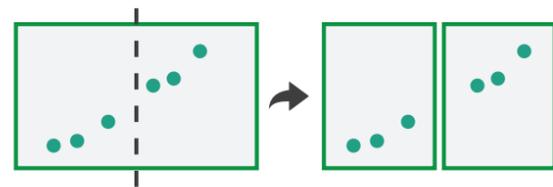

→ Superimpose

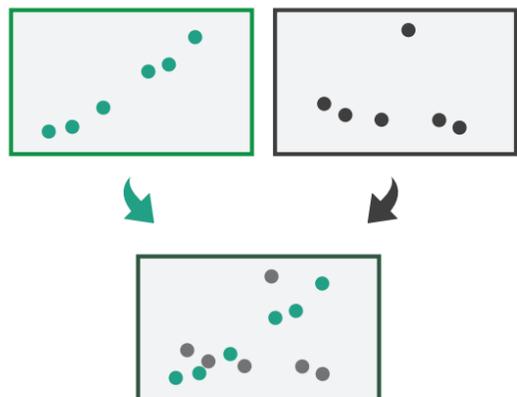

Juxtapose and coordinate views

→ Share Encoding: Same/Different

→ *Linked Highlighting*



→ Share Data: All/Subset/None




→ Share Navigation



Idiom: **Linked highlighting**

System: **EDV**

- see how regions contiguous in one view are distributed within another
 - powerful and pervasive interaction idiom
- encoding: different
 - *multiform*
- data: all shared

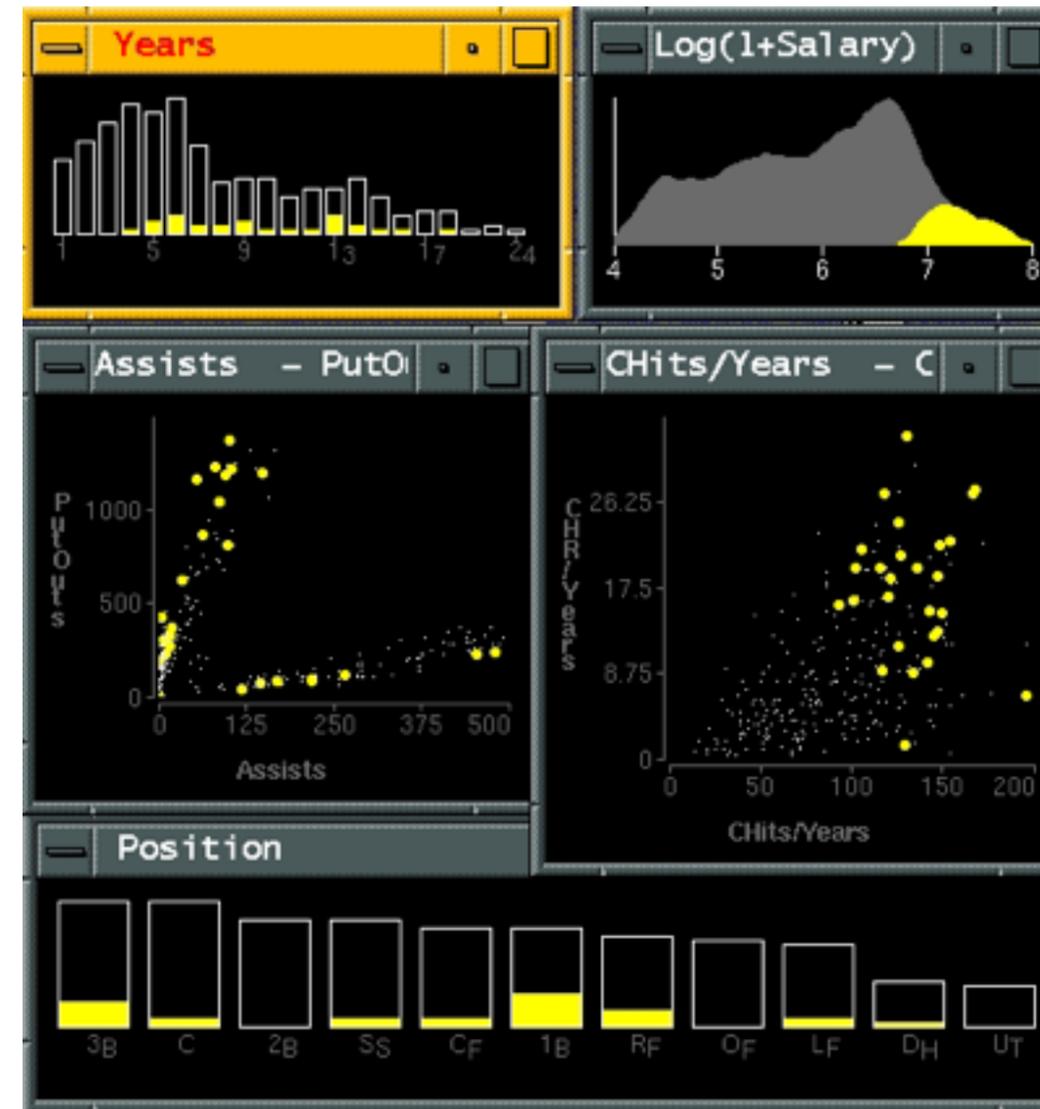

[Visual Exploration of Large Structured Datasets. Wills. Proc. New Techniques and Trends in Statistics (NTTS), pp. 237–246. IOS Press, 1995.]

Idiom: **bird's-eye maps**

System: **Google Maps**

- encoding: same
- data: subset shared
- navigation: shared
 - bidirectional linking

- differences
 - viewpoint
 - (size)

- **overview-detail**




[A Review of Overview+Detail, Zooming, and Focus+Context Interfaces. Cockburn, Karlson, and Bederson. *ACM Computing Surveys* 41:1 (2008), 1–31.]

Idiom: Small multiples



System: Cerebral

- encoding: same
- data: none shared
 - different attributes for node colors
 - (same network layout)
- navigation: shared

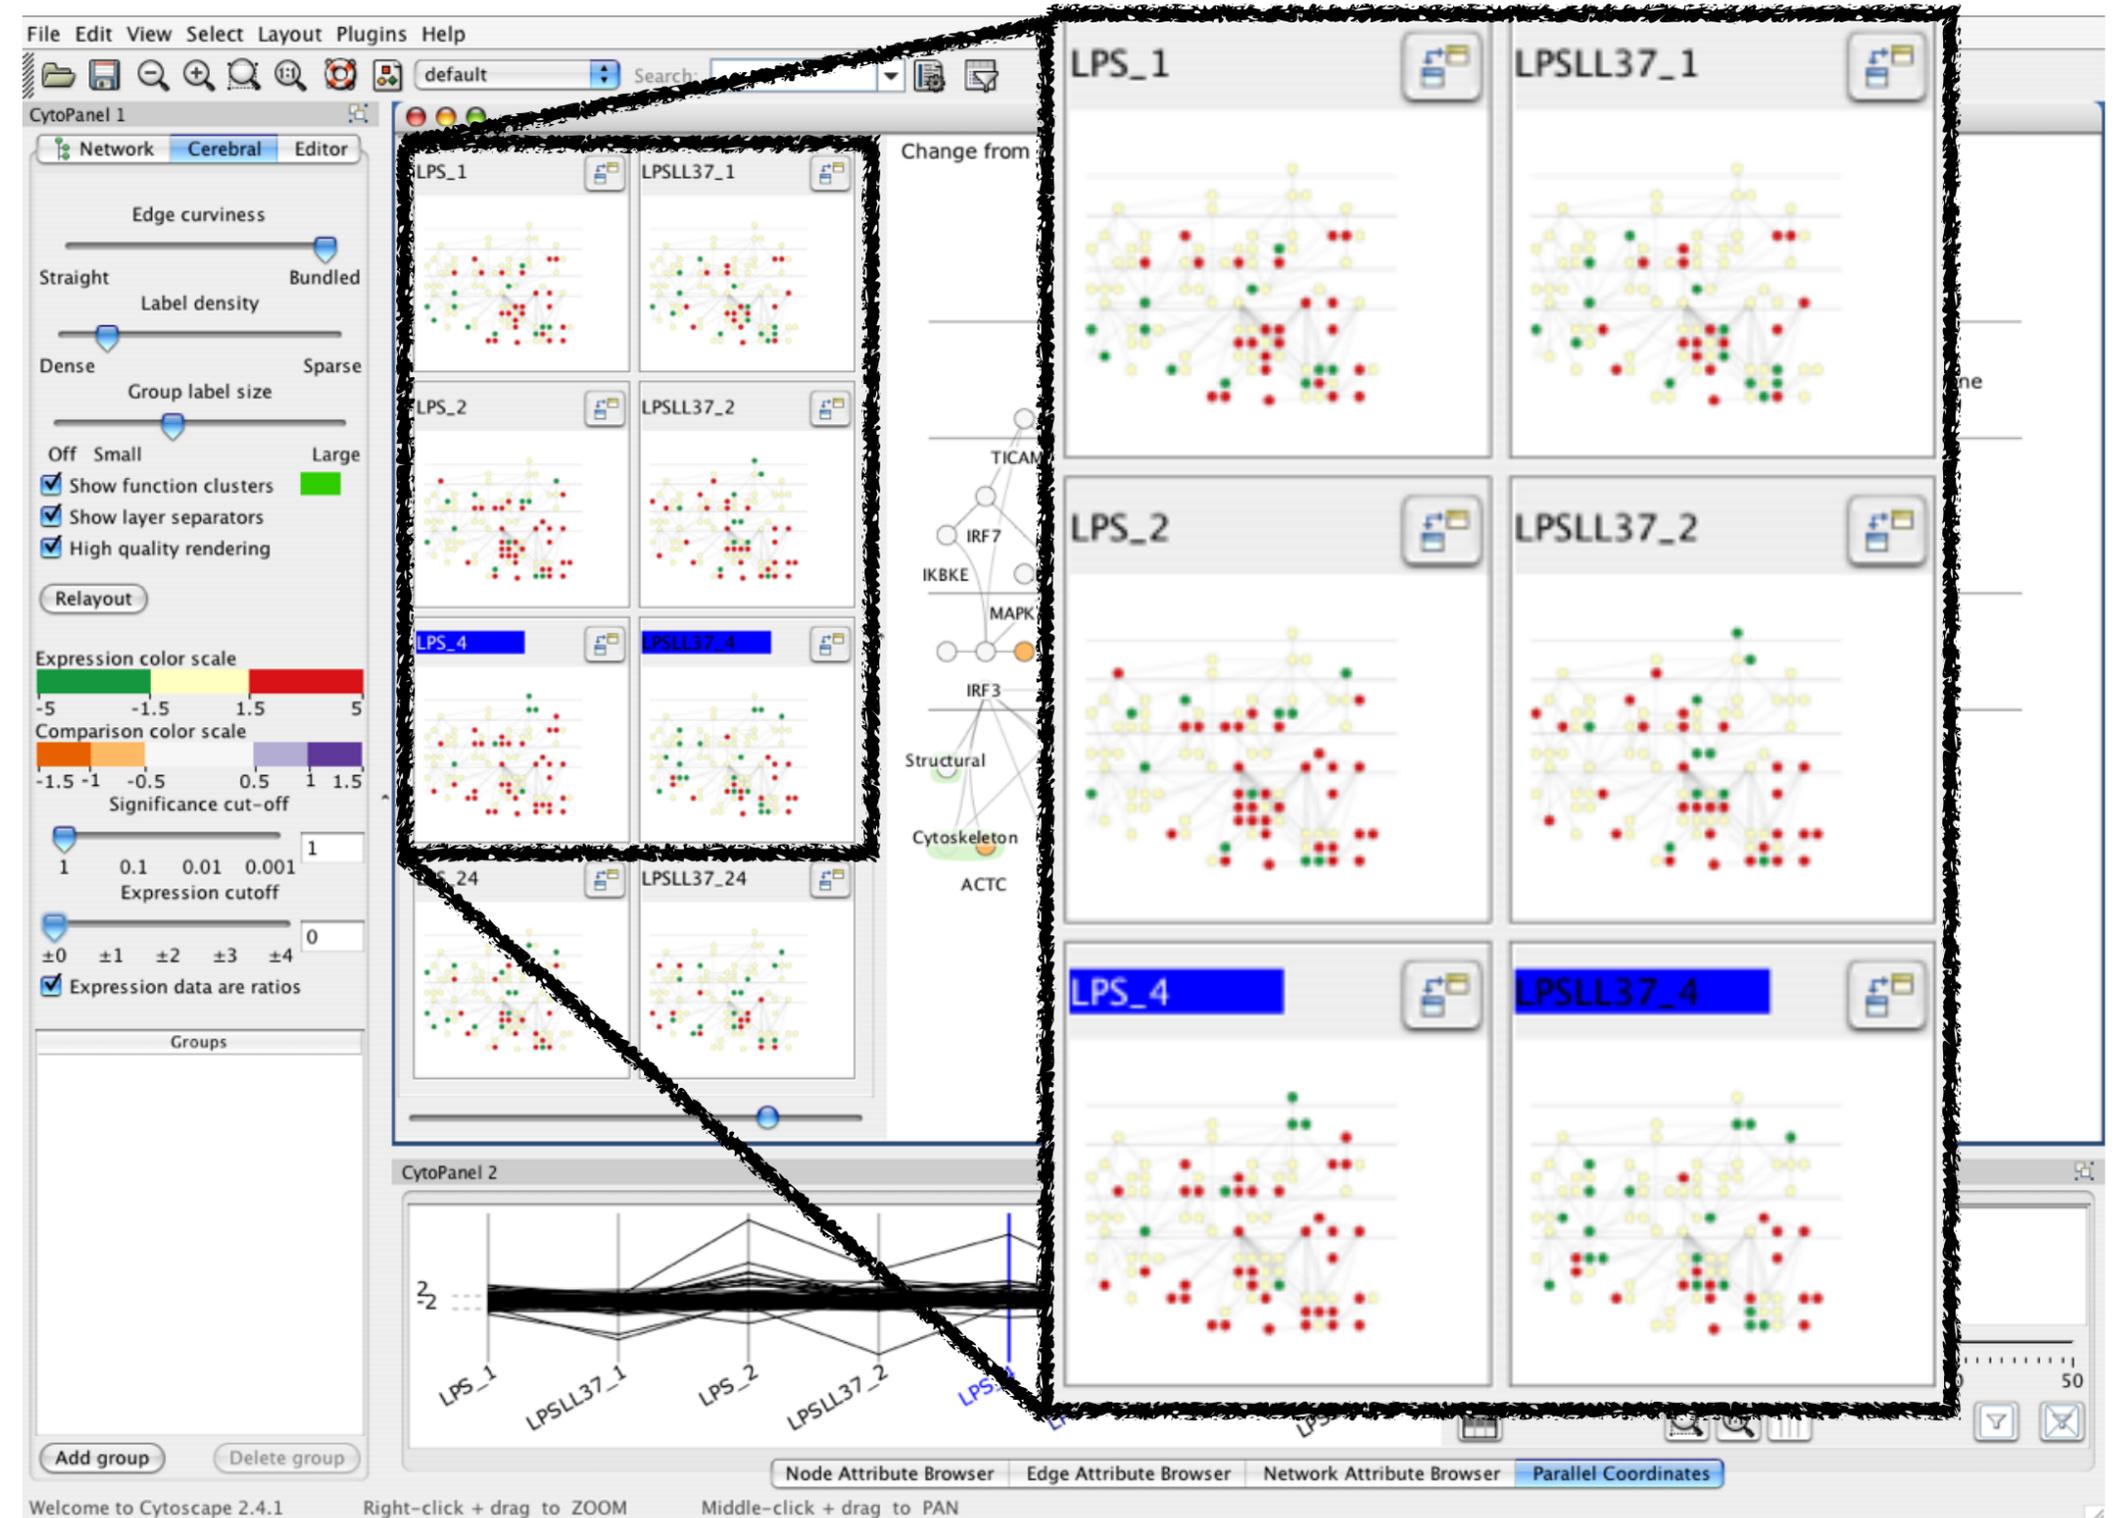

[Cerebral: Visualizing Multiple Experimental Conditions on a Graph with Biological Context. Barsky, Munzner, Gardy, and Kincaid. *IEEE Trans. Visualization and Computer Graphics (Proc. InfoVis 2008)* 14:6 (2008), 1253–1260.]

Coordinate views: Design choice interaction

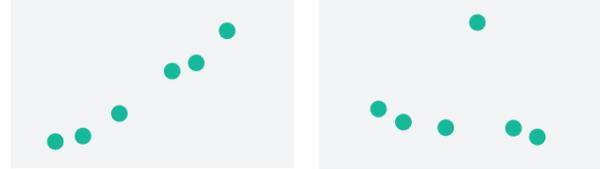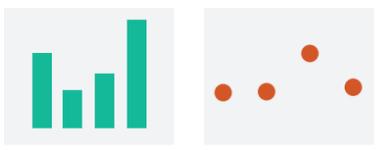		Data		
		All	Subset	None
Encoding	Same	Redundant	 Overview/ Detail	 Small Multiples
	Different	 Multiform	 Multiform, Overview/ Detail	No Linkage

- why juxtapose views?


- benefits: eyes vs memory

- lower cognitive load to move eyes between 2 views than remembering previous state with single changing view

- costs: display area, 2 views side by side each have only half the area of one view


Why not animation?

- disparate frames and regions: comparison difficult
 - vs contiguous frames
 - vs small region
 - vs coherent motion of group
- safe special case
 - animated transitions

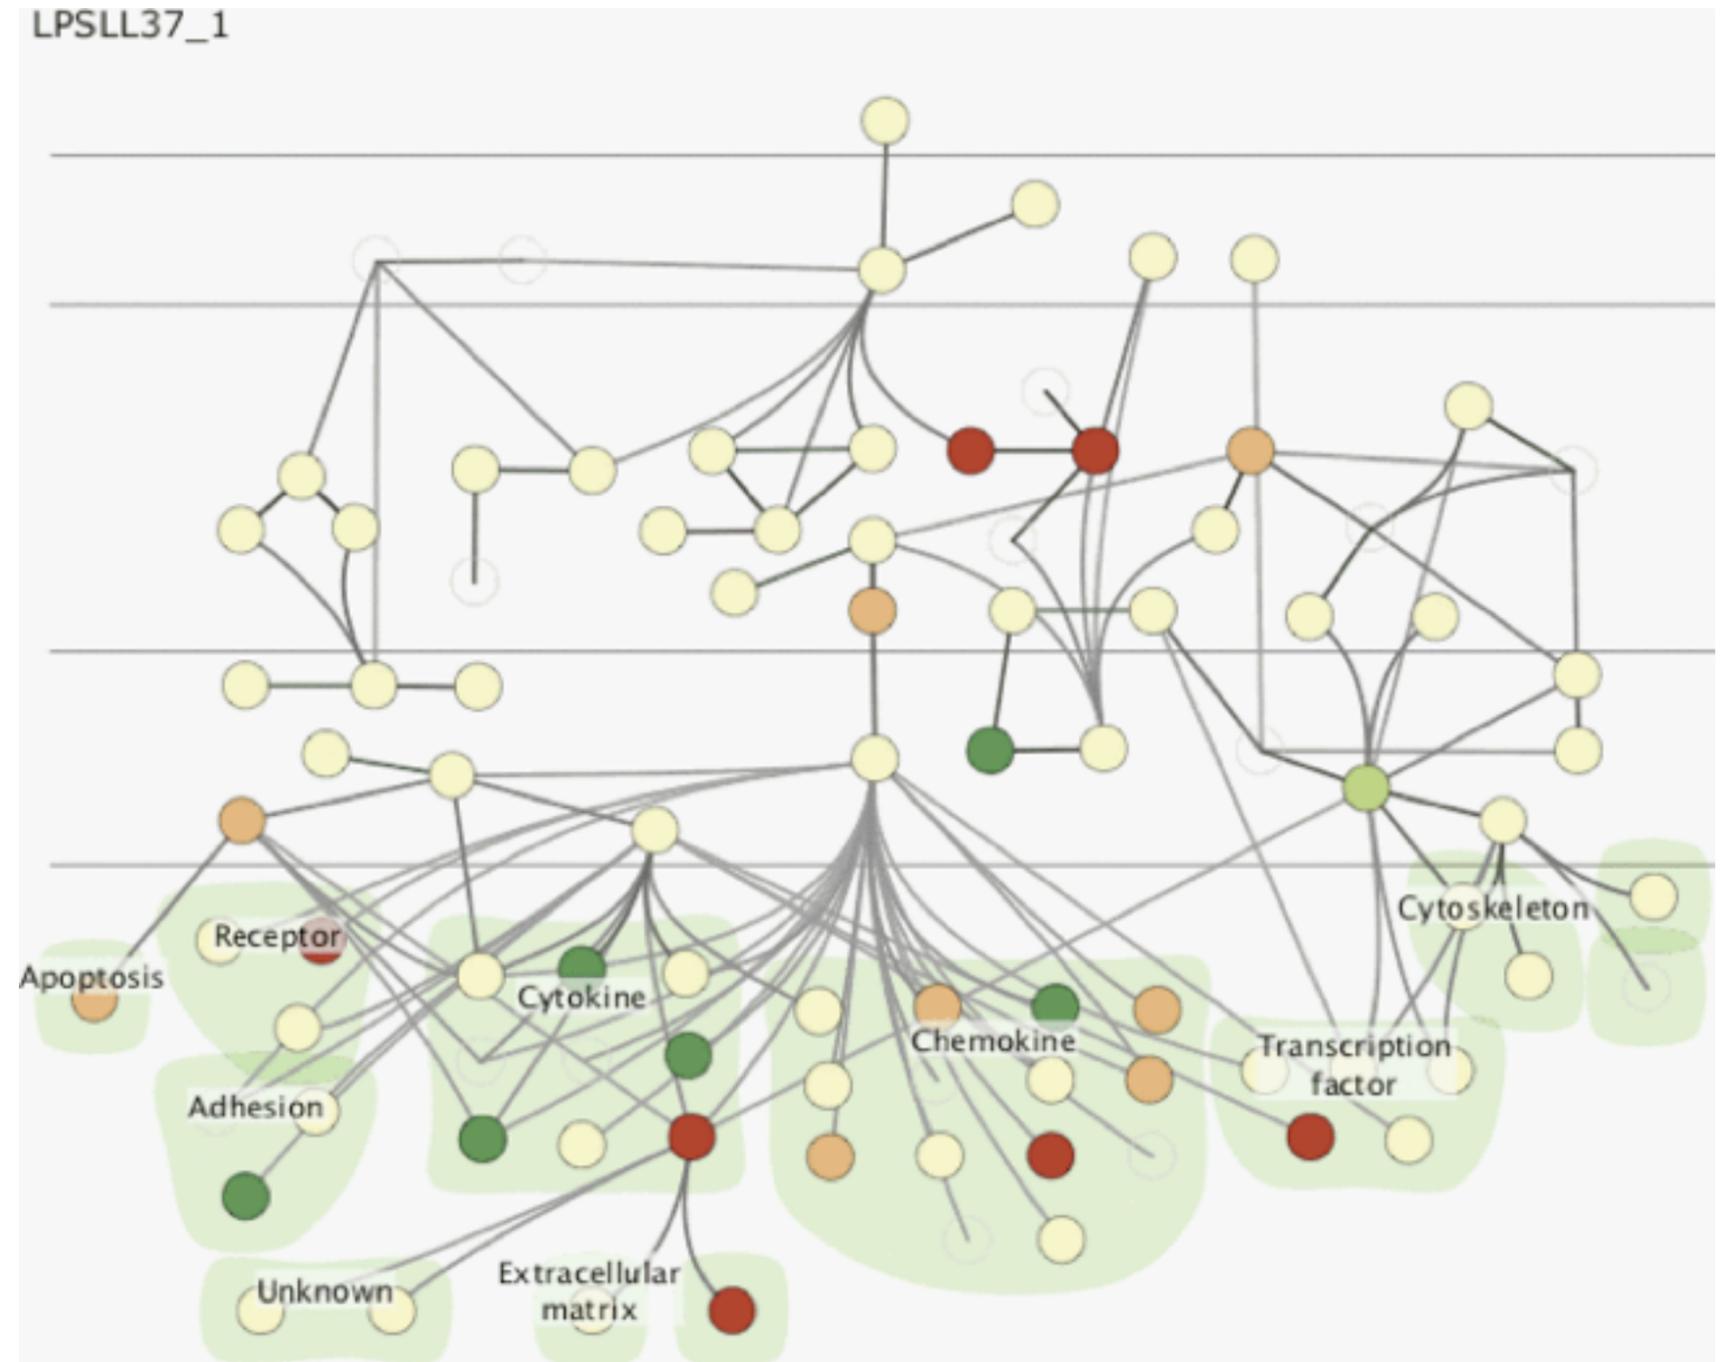

System: **Improvise**

- investigate power of multiple views
 - pushing limits on view count, interaction complexity
 - how many is ok?
 - open research question
 - reorderable lists
 - easy lookup
 - useful when linked to other encodings

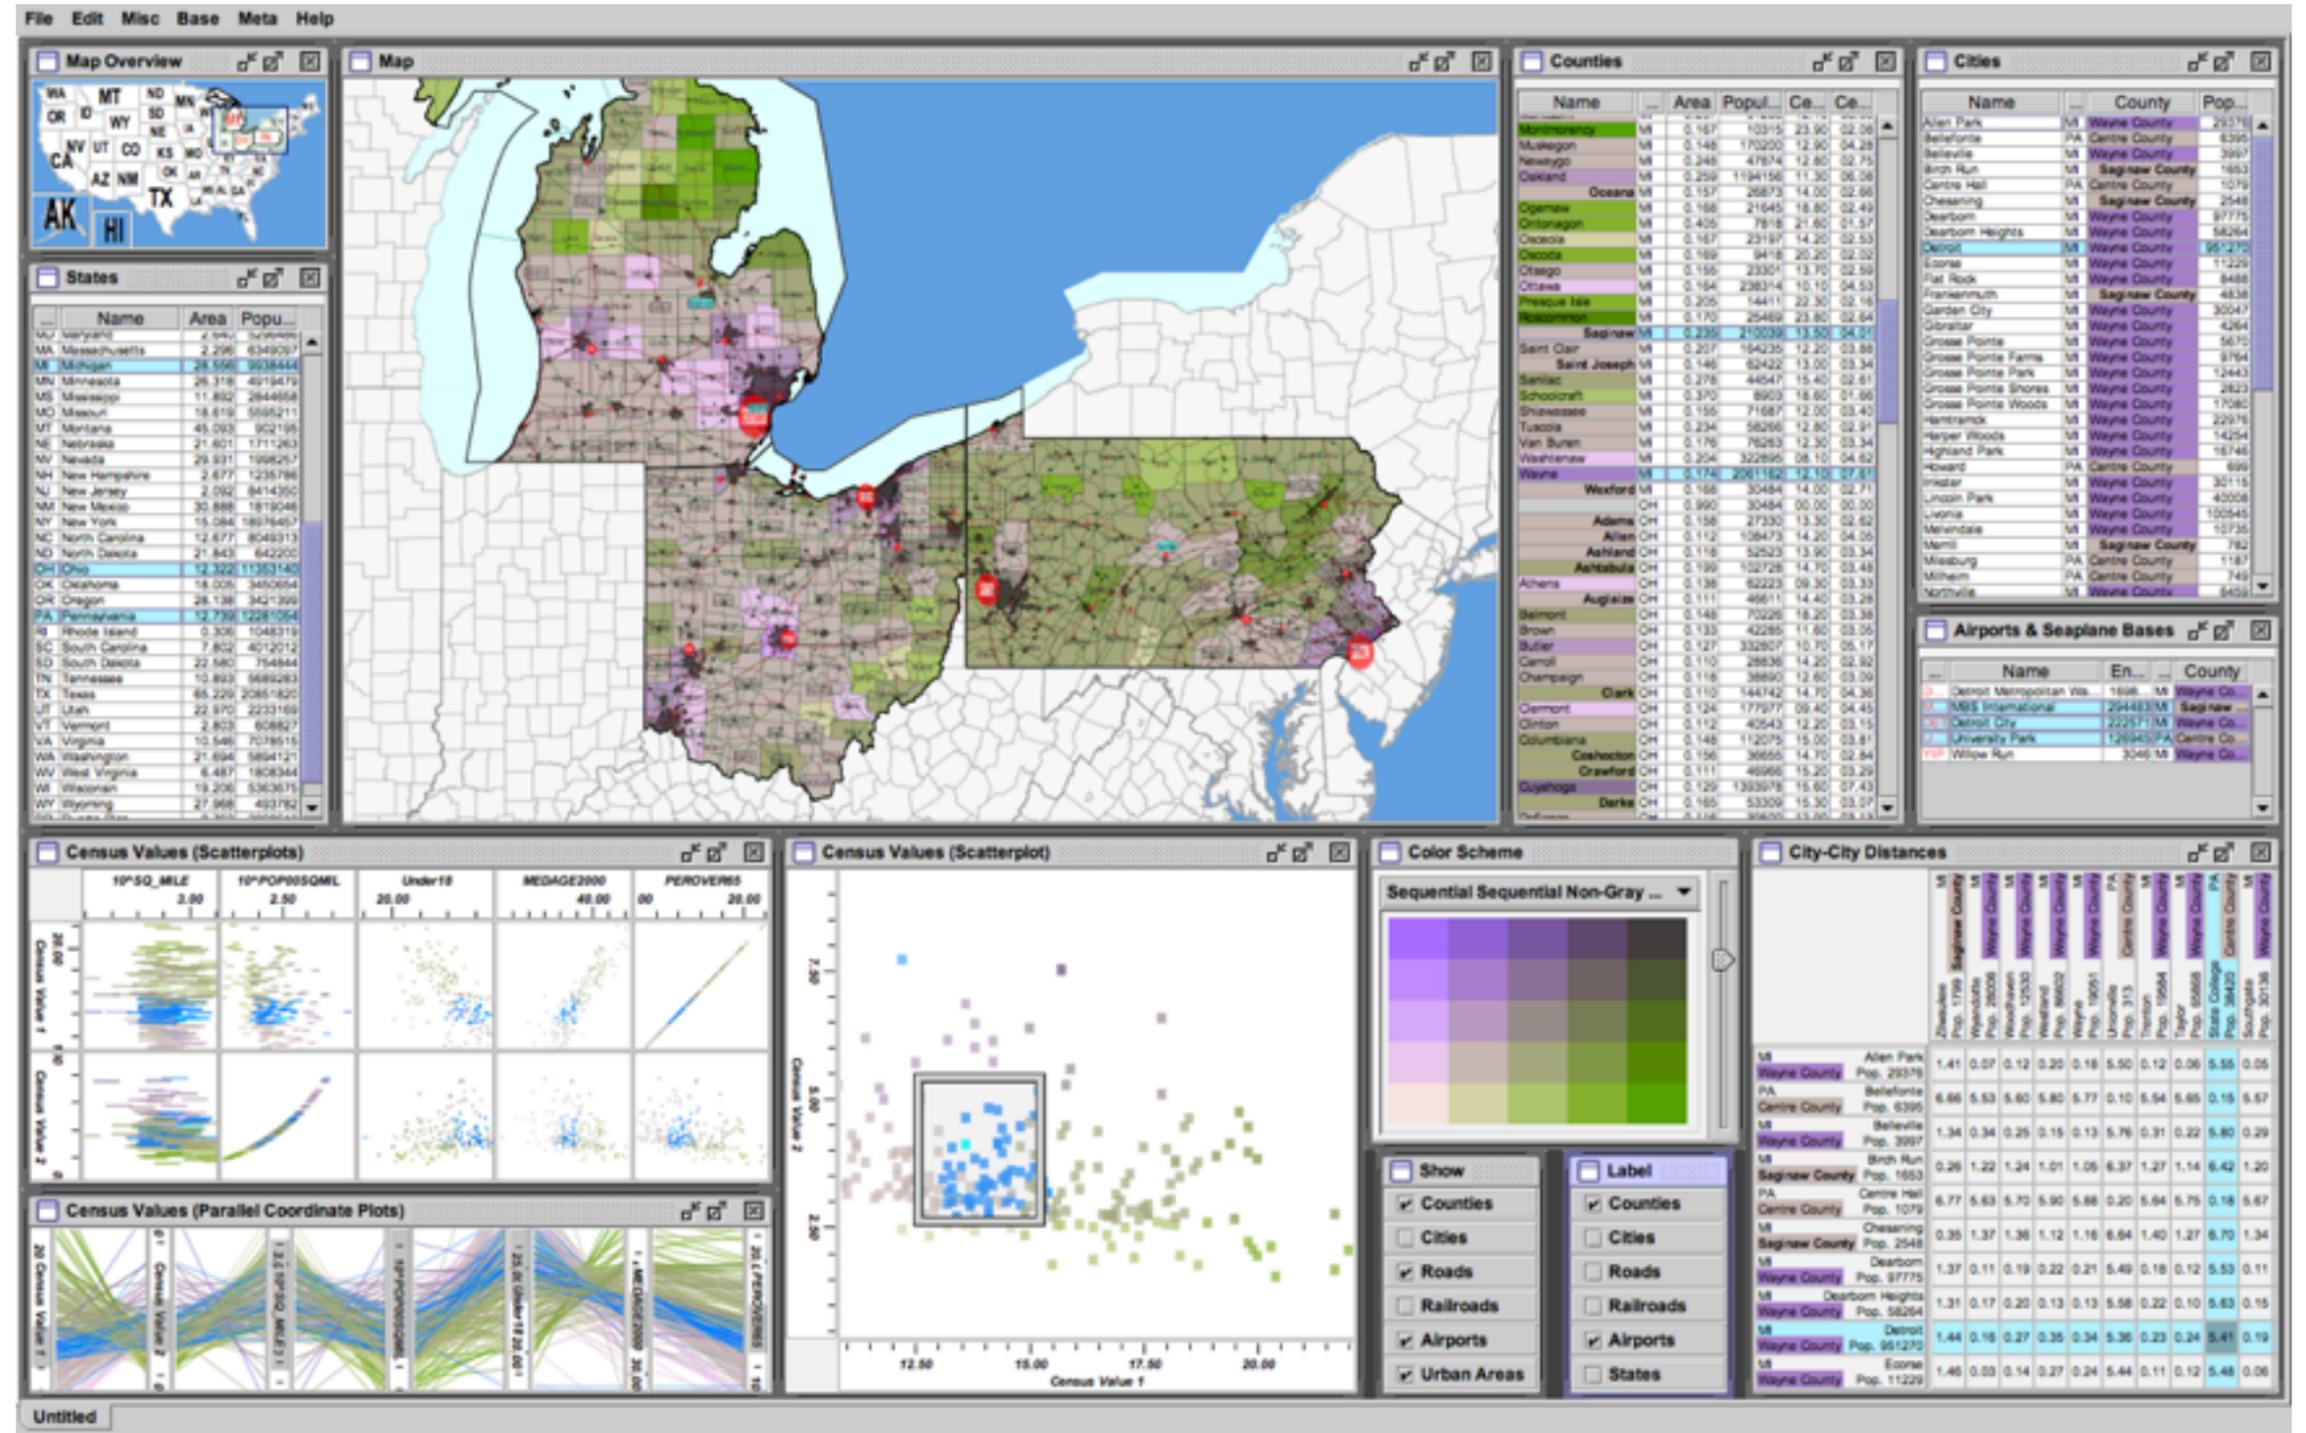


[Building Highly-Coordinated Visualizations In Improvise. Weaver. Proc. IEEE Symp. Information Visualization (InfoVis), pp. 159–166, 2004.]

Partition into views

- how to divide data between views → Partition into Side-by-Side Views

- split into regions by attributes
- encodes association between items using spatial proximity
- order of splits has major implications for what patterns are visible

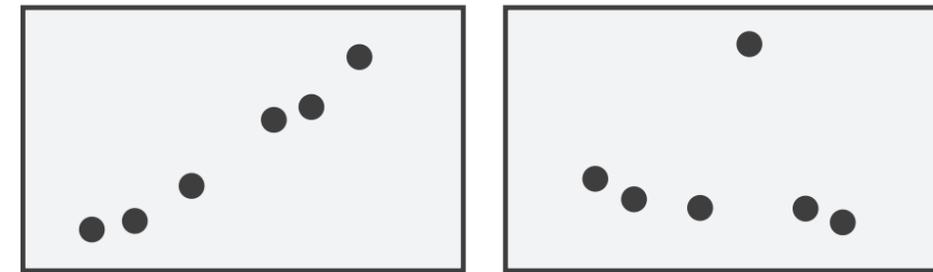



- no strict dividing line

– *view: big/detailed*

- contiguous region in which visually encoded data is shown on the display


– *glyph: small/iconic*

- object with internal structure that arises from multiple marks

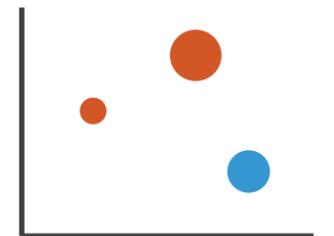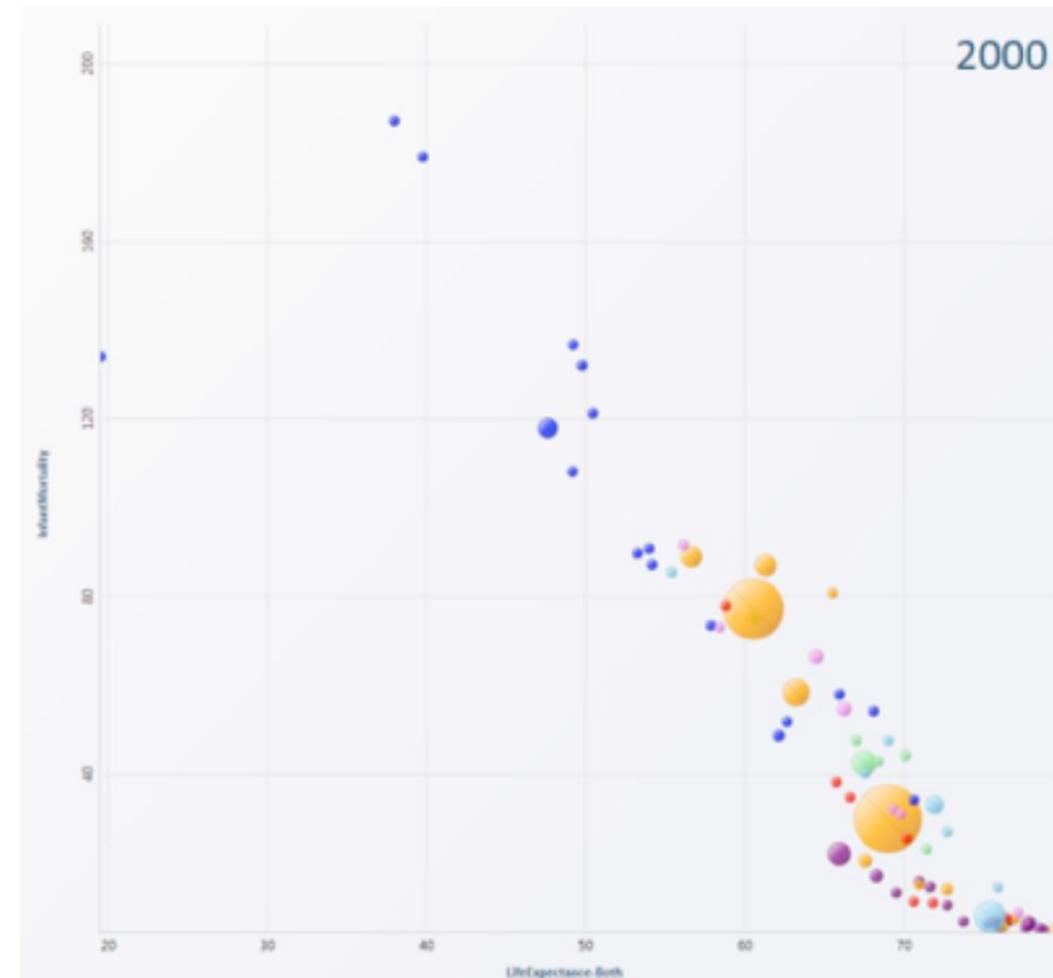


Partitioning: List alignment

- single bar chart with grouped bars
 - split by state into regions
 - complex glyph within each region showing all ages
 - compare: easy within state, hard across ages

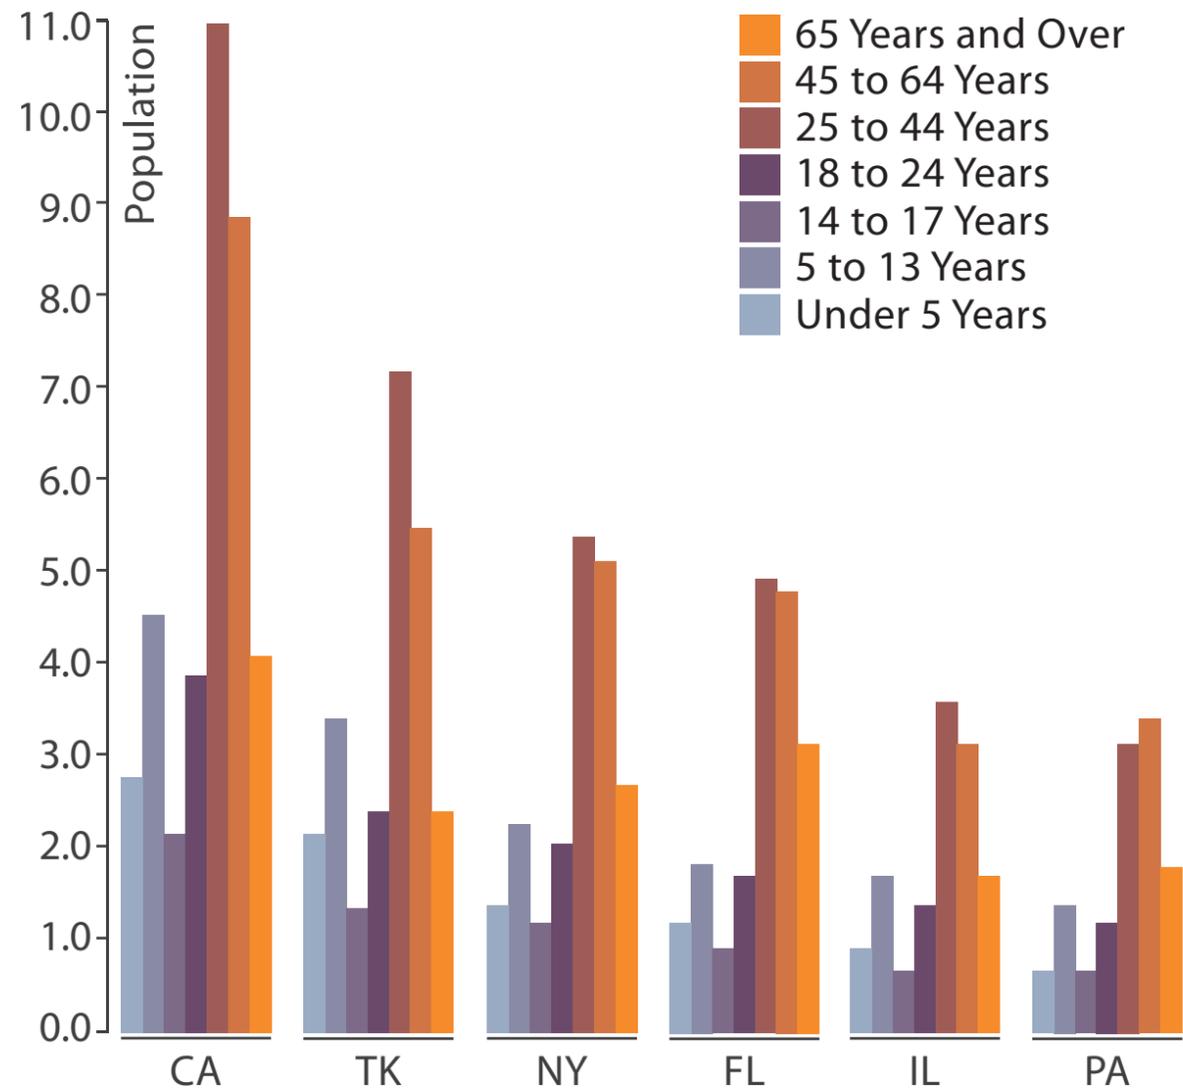


- small-multiple bar charts
 - split by age into regions
 - one chart per region
 - compare: easy within age, harder across states

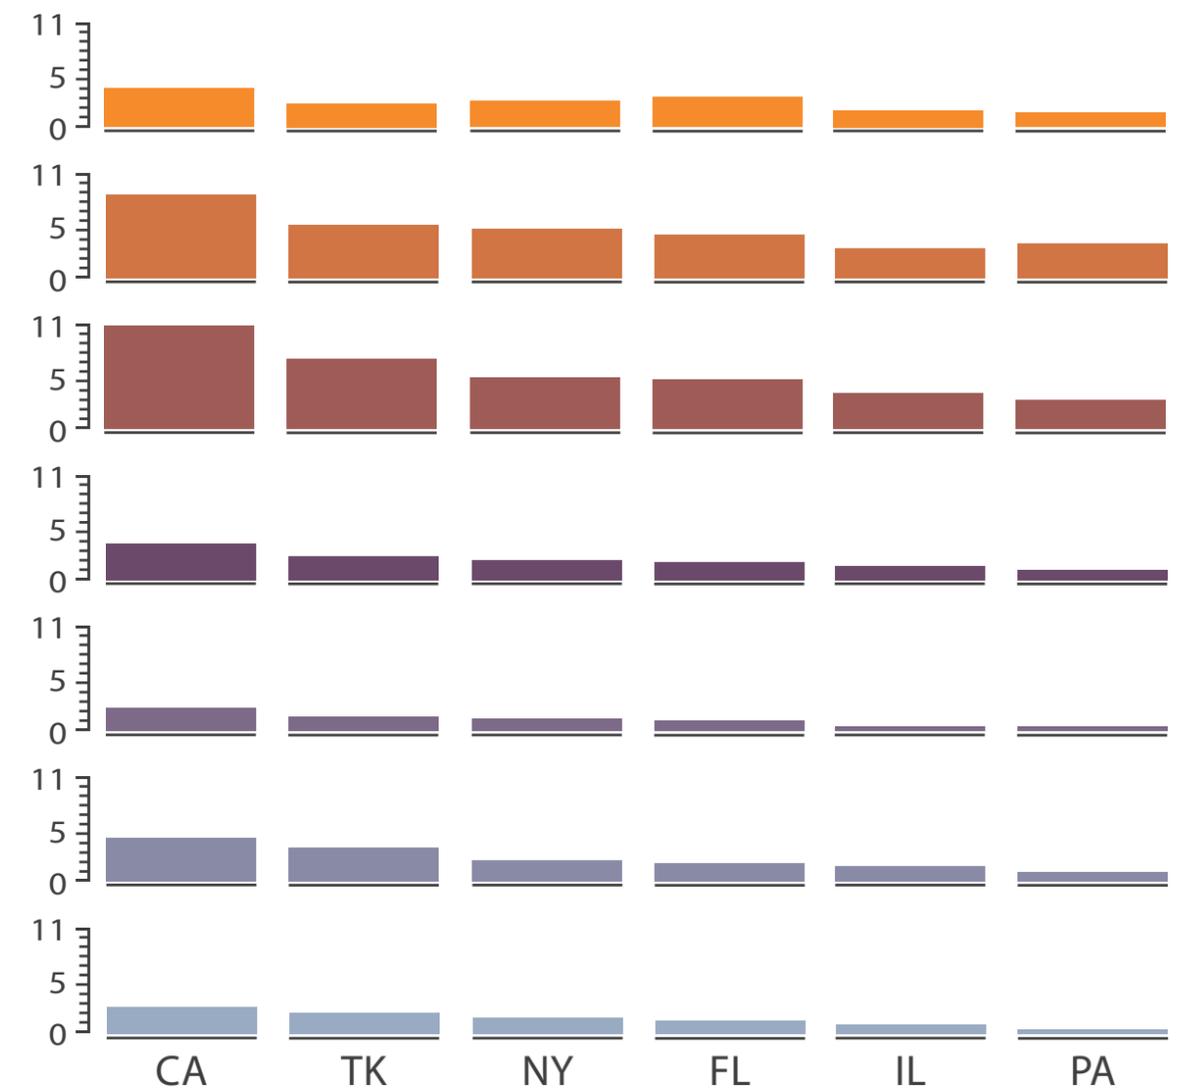

Partitioning: Recursive subdivision

System: **HIVE**

- split by neighborhood
- then by type
- then time
 - years as rows
 - months as columns
- color by price
- neighborhood patterns
 - where it's expensive
 - where you pay much more for detached type

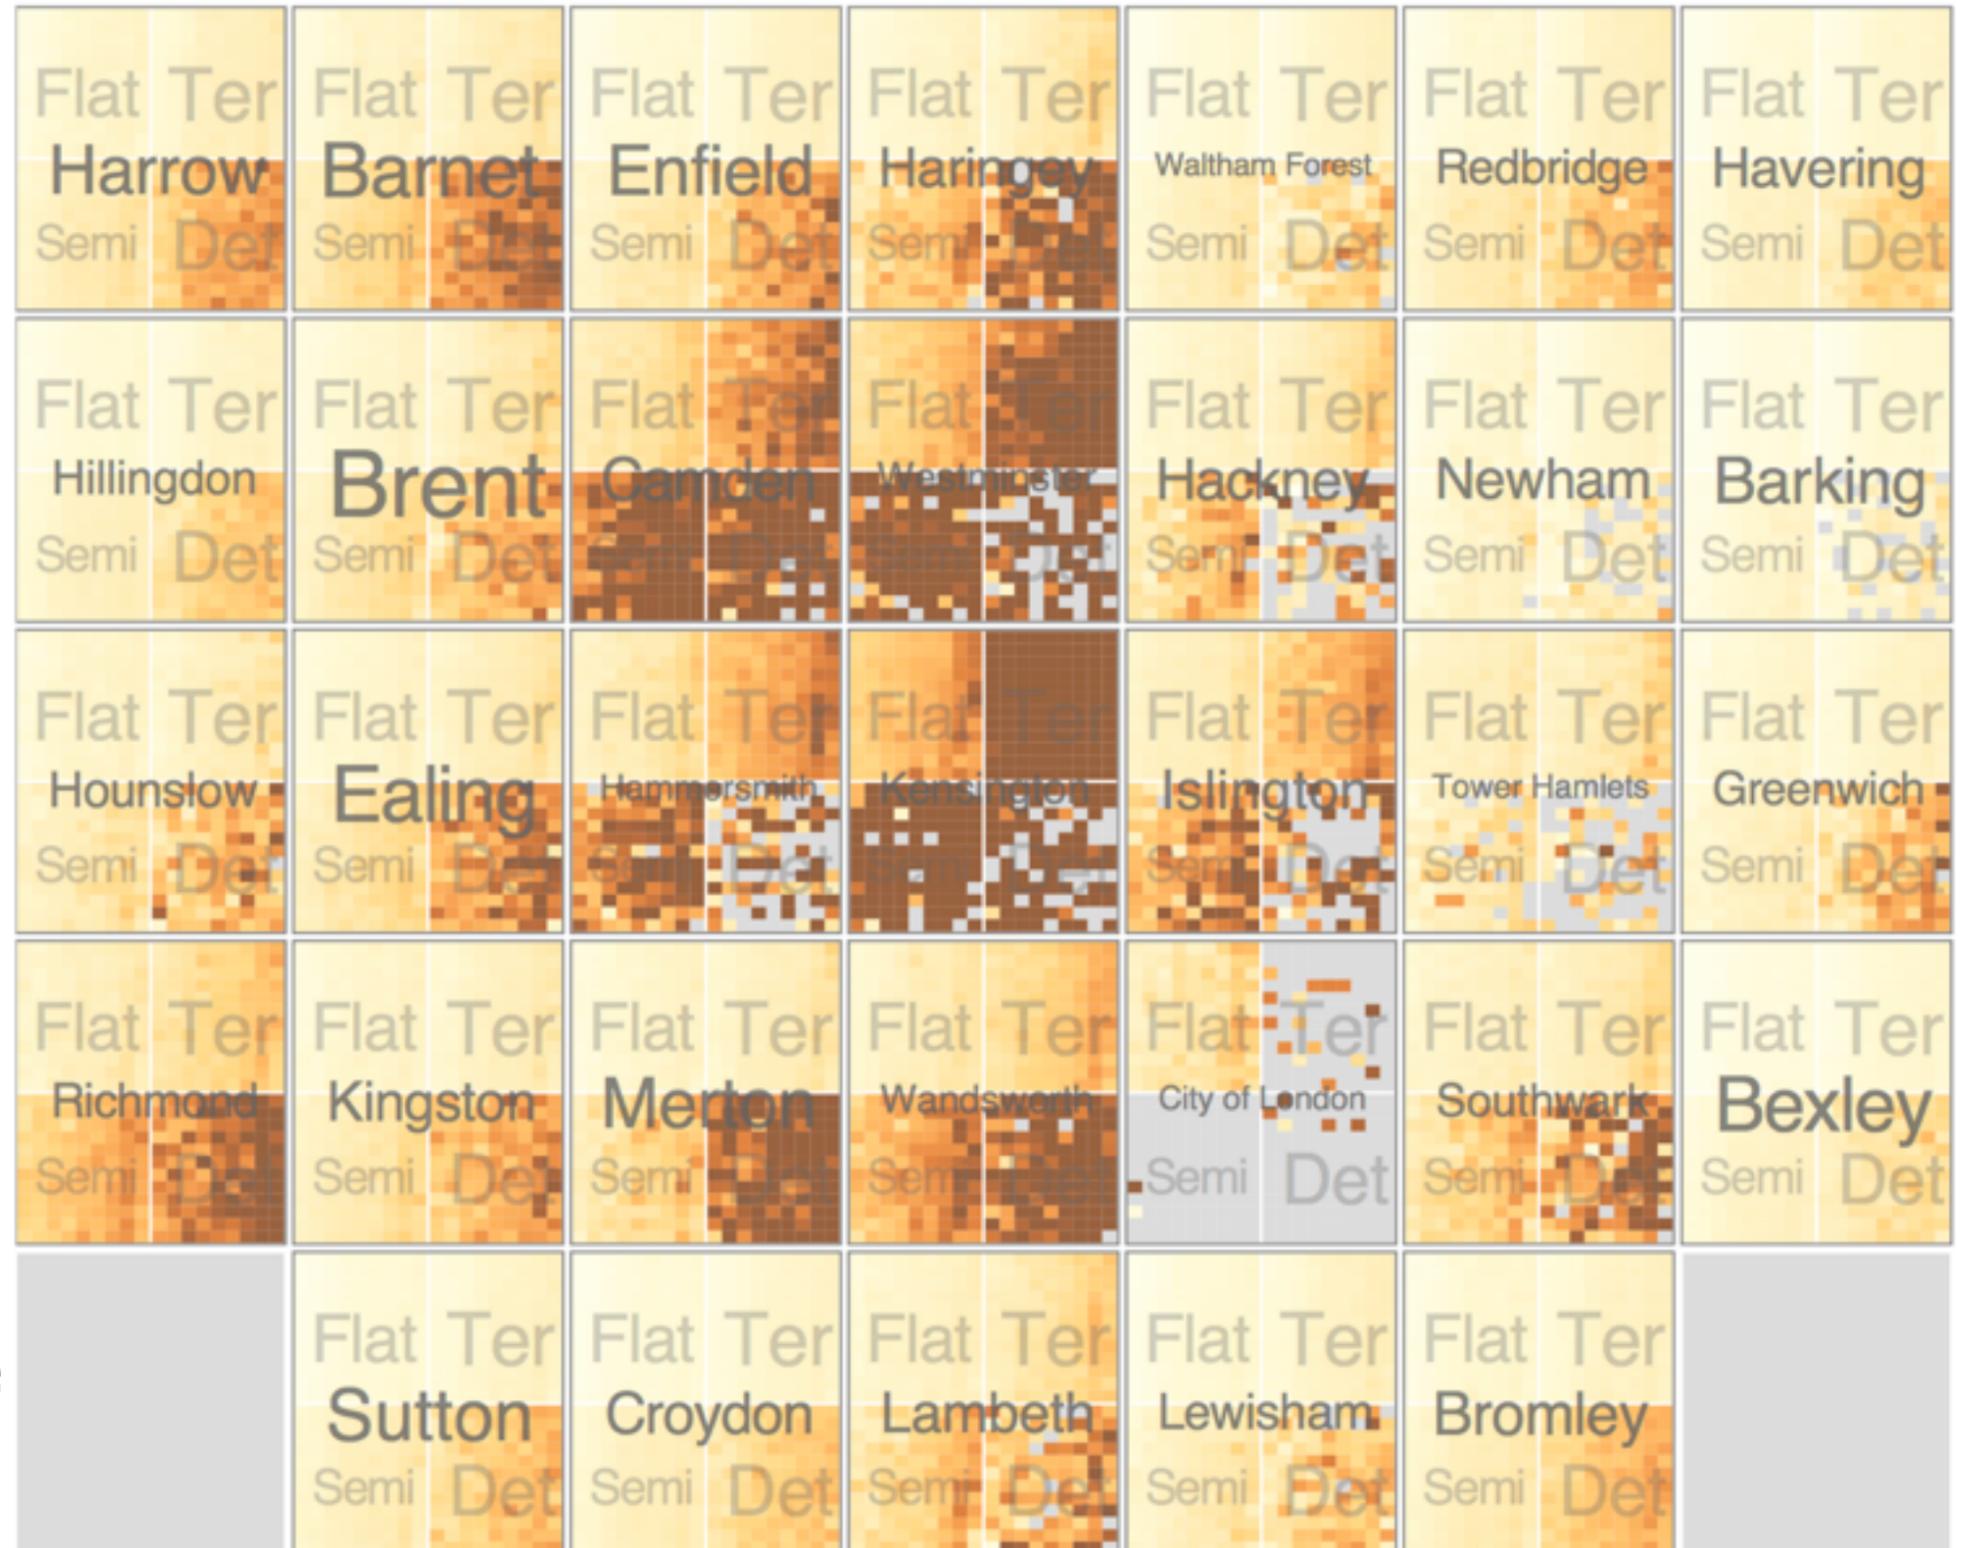

Partitioning: Recursive subdivision

System: **HIVE**


- switch order of splits
 - type then neighborhood
- switch color
 - by price variation
- type patterns
 - within specific type, which neighborhoods inconsistent



Partitioning: Recursive subdivision

System: **HIVE**


- different encoding for second-level regions
 - choropleth maps

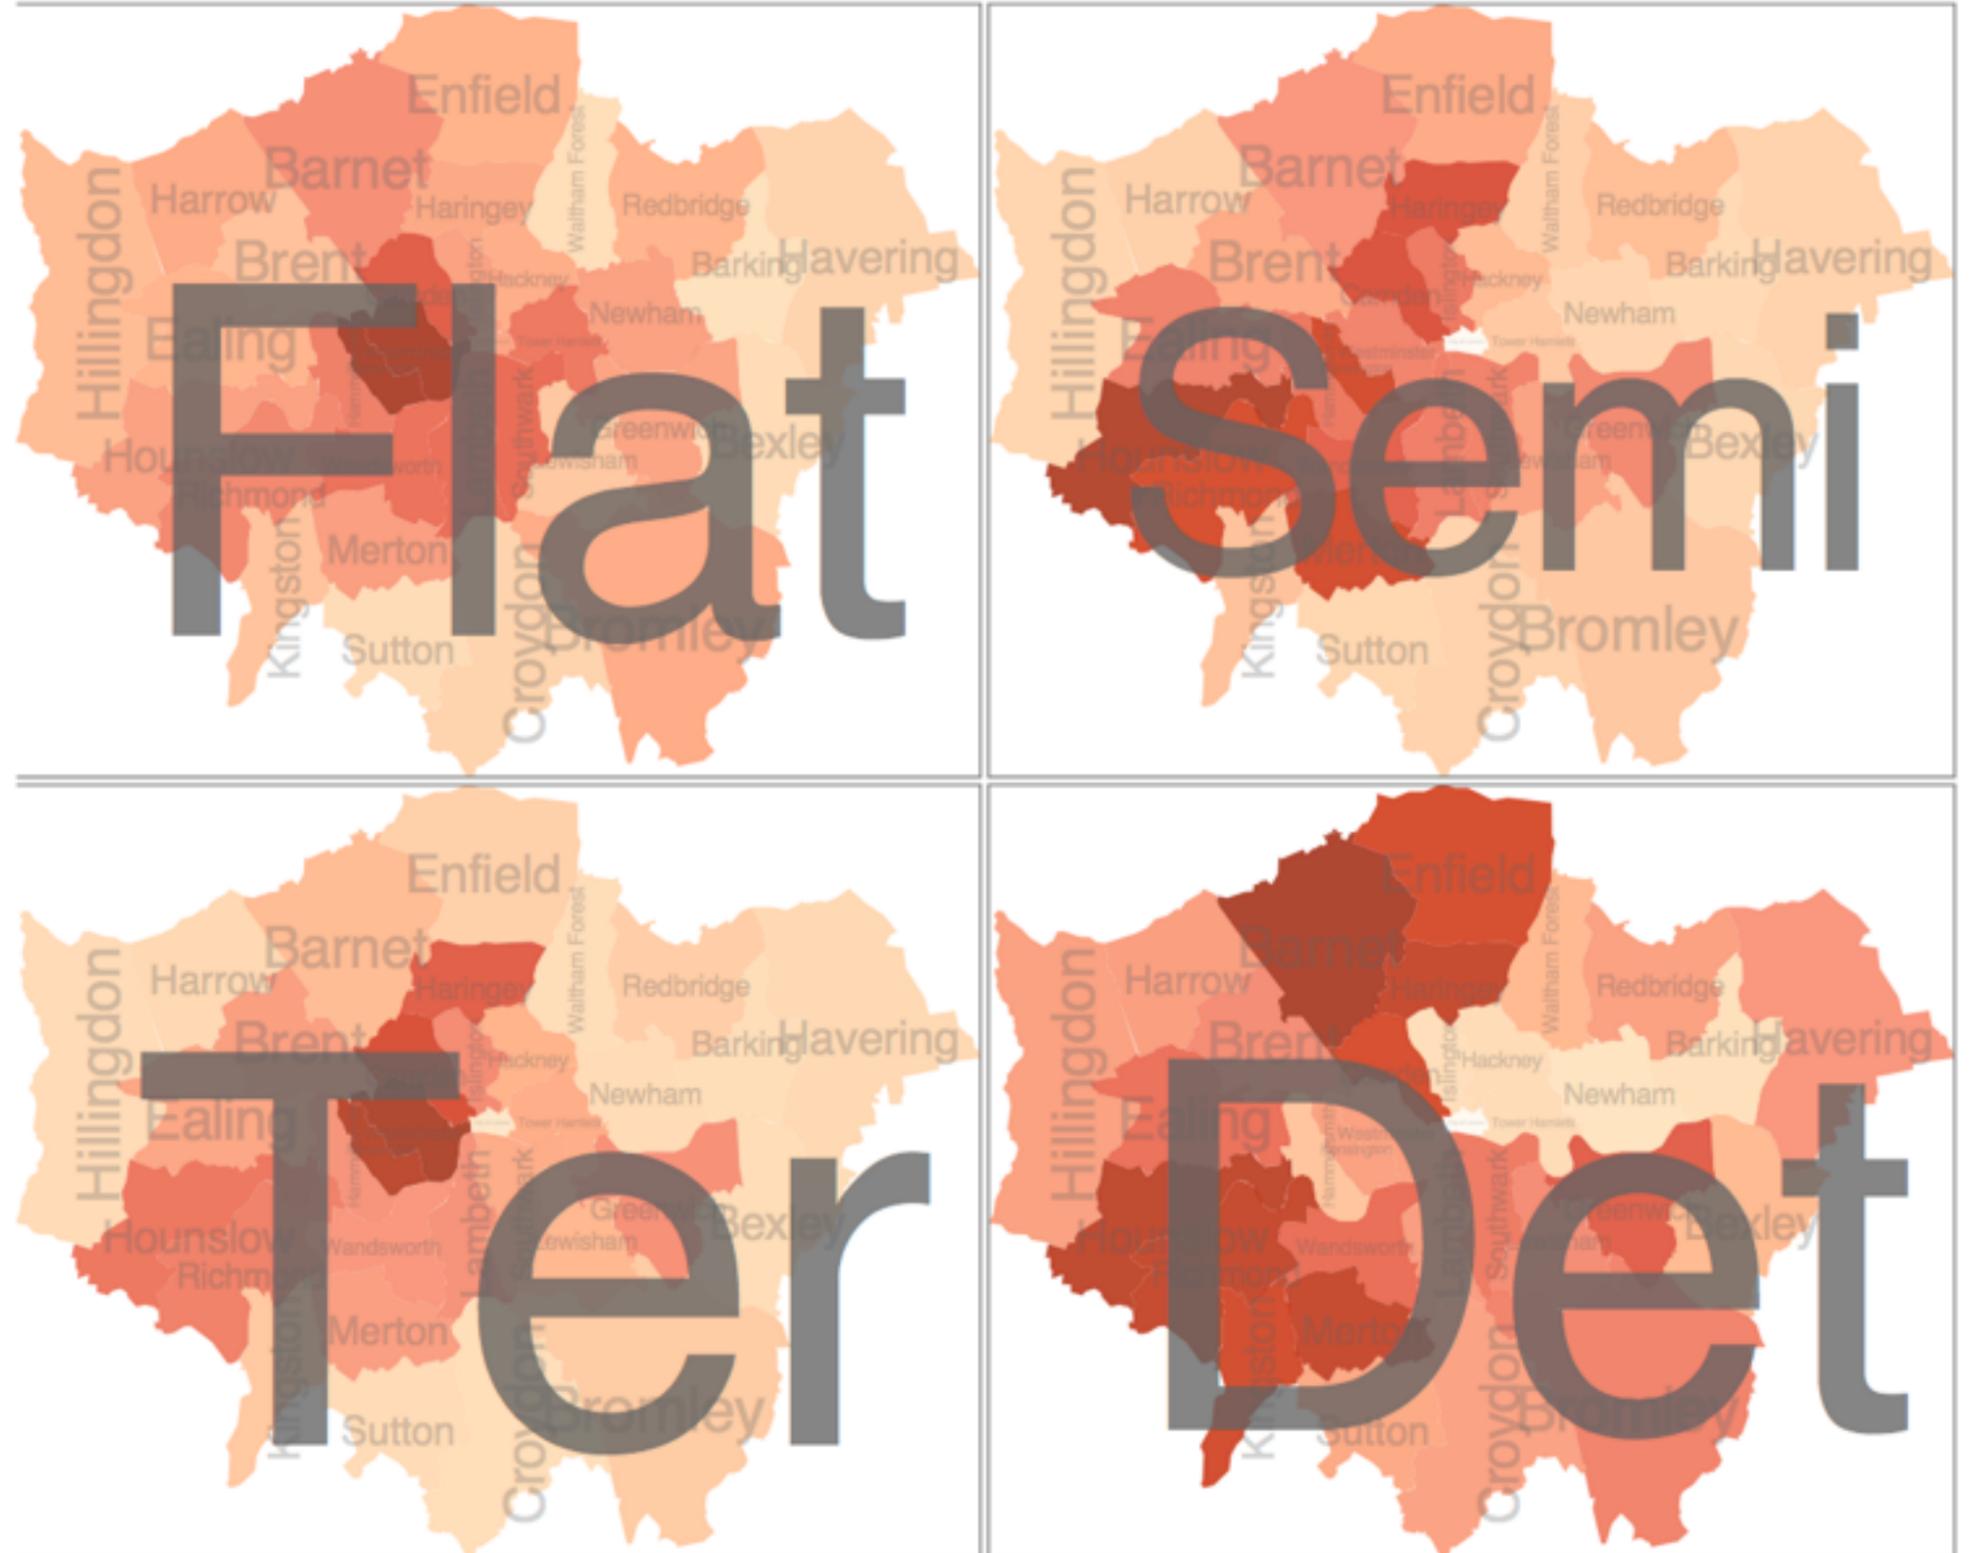

Partitioning: Recursive subdivision

System: **HIVE**

- size regions by sale counts
 - not uniformly
- result: treemap

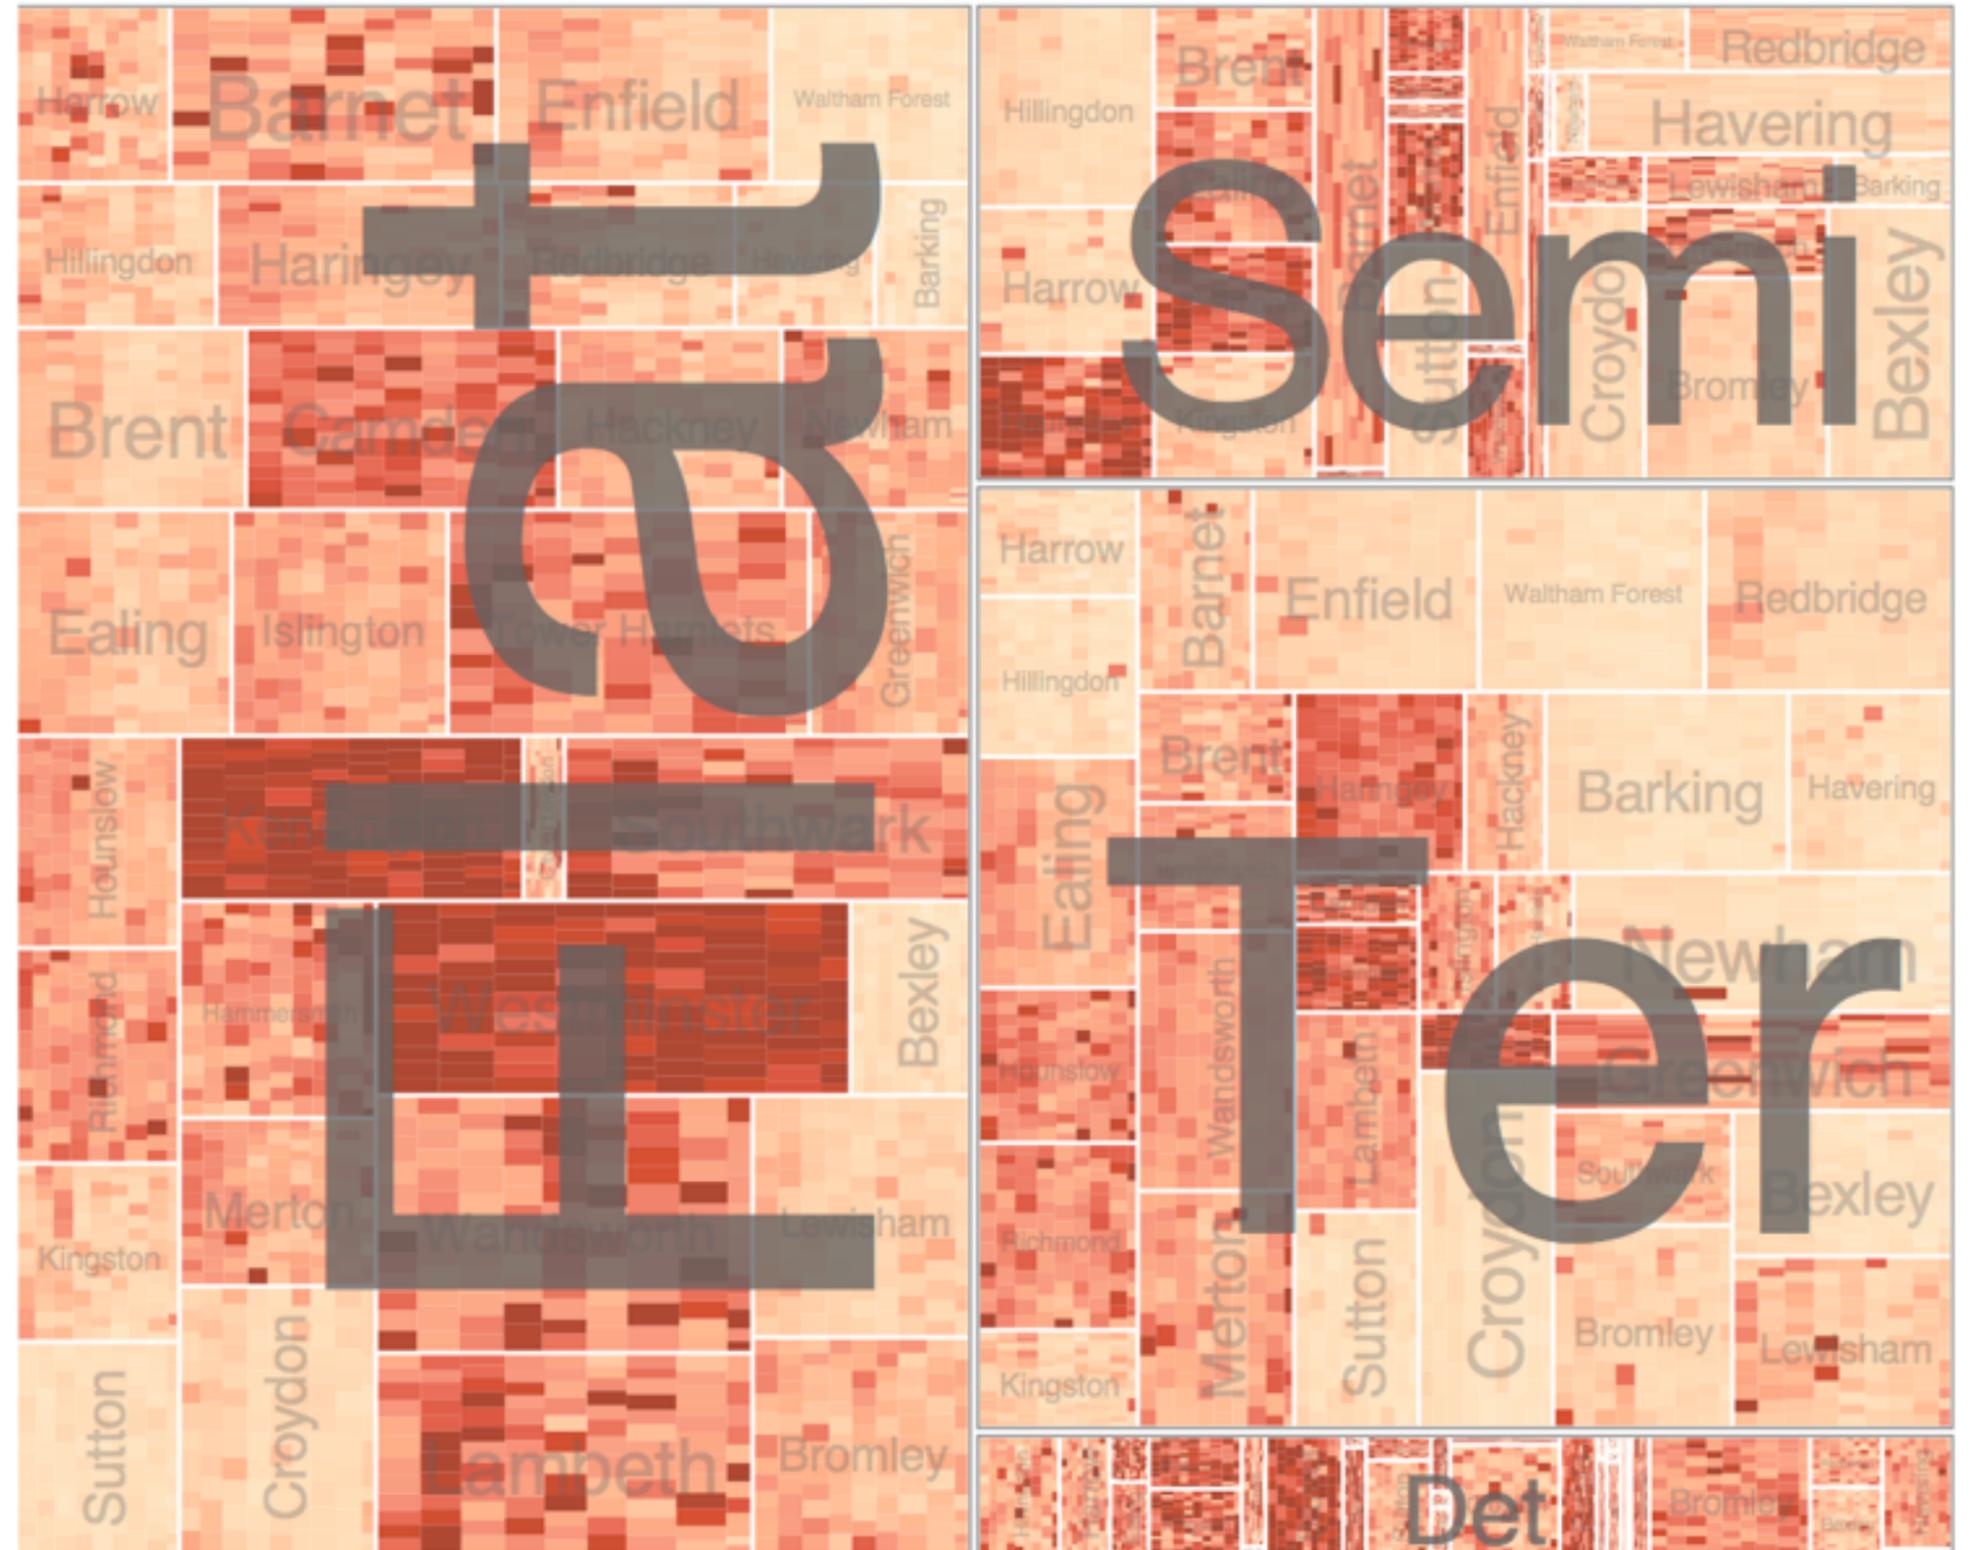


Superimpose layers

- *layer*: set of objects spread out over region
 - each set is visually distinguishable group
 - extent: whole view

➔ Superimpose Layers

- design choices

- how many layers, how to distinguish?
 - encode with different, nonoverlapping channels
 - two layers achievable, three with careful design
- small static set, or dynamic from many possible?

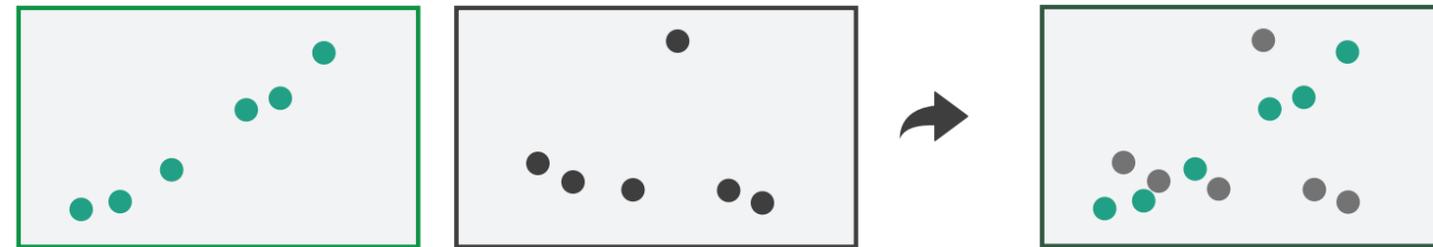

Static visual layering

- foreground layer: roads
 - hue, size distinguishing main from minor
 - high luminance contrast from background
- background layer: regions
 - desaturated colors for water, parks, land areas
- user can selectively focus attention
- “get it right in black and white”
 - check luminance contrast with greyscale view




[Get it right in black and white. Stone. 2010.




<http://www.stonesc.com/wordpress/2010/03/get-it-right-in-black-and-white>]

Superimposing limits

- few layers, but many lines
 - up to a few dozen
 - but not hundreds
- superimpose vs juxtapose: empirical study
 - superimposed for local, multiple for global
 - tasks
 - local: maximum, global: slope, discrimination
 - same screen space for all multiples vs single superimposed

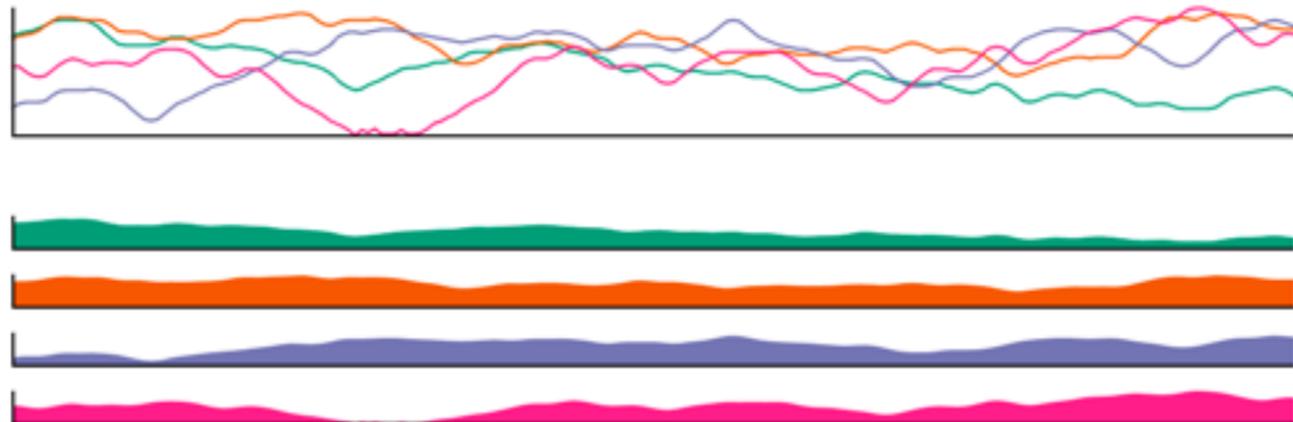


[Graphical Perception of Multiple Time Series. Javed, McDonnell, and Elmqvist. IEEE Transactions on Visualization and Computer Graphics (Proc. IEEE InfoVis 2010) 16:6 (2010), 927–934.]

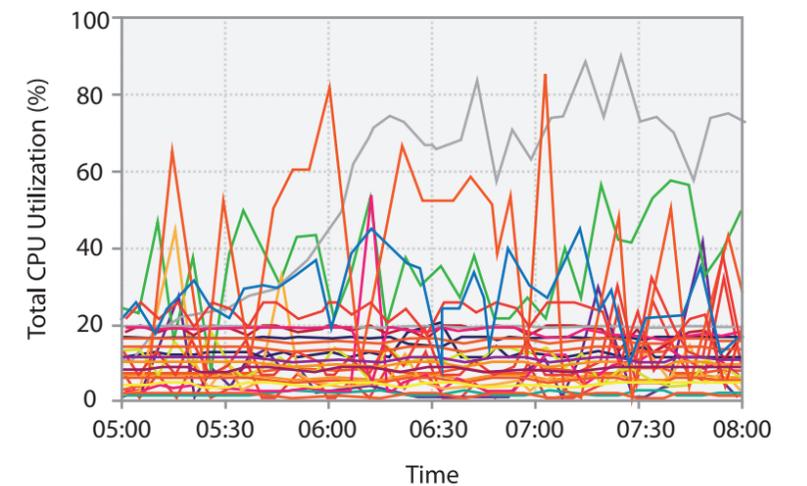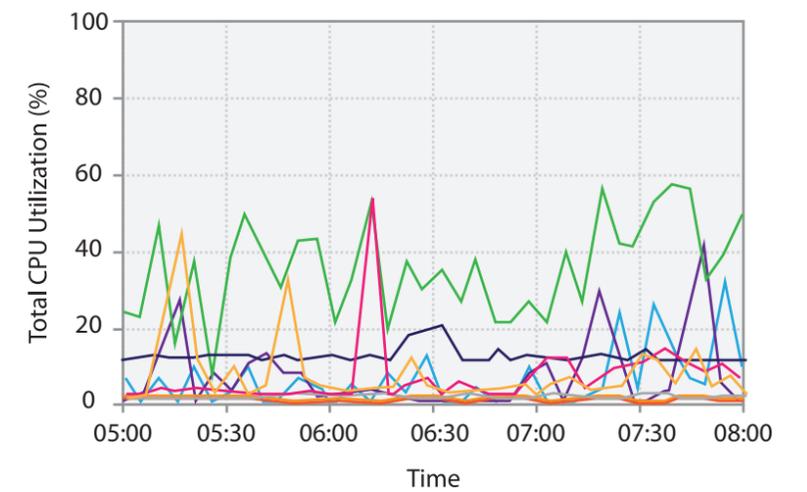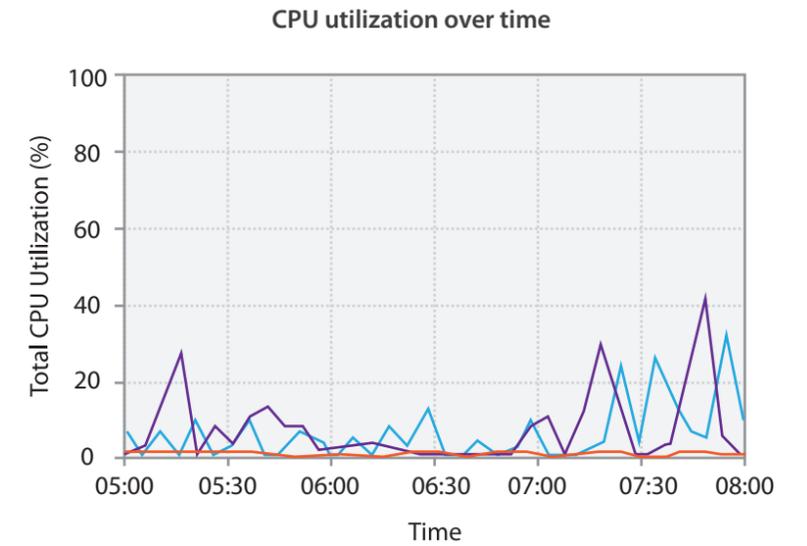

Dynamic visual layering

- interactive, from selection
 - lightweight: click
 - very lightweight: hover
- ex: 1-hop neighbors

System: Cerebral

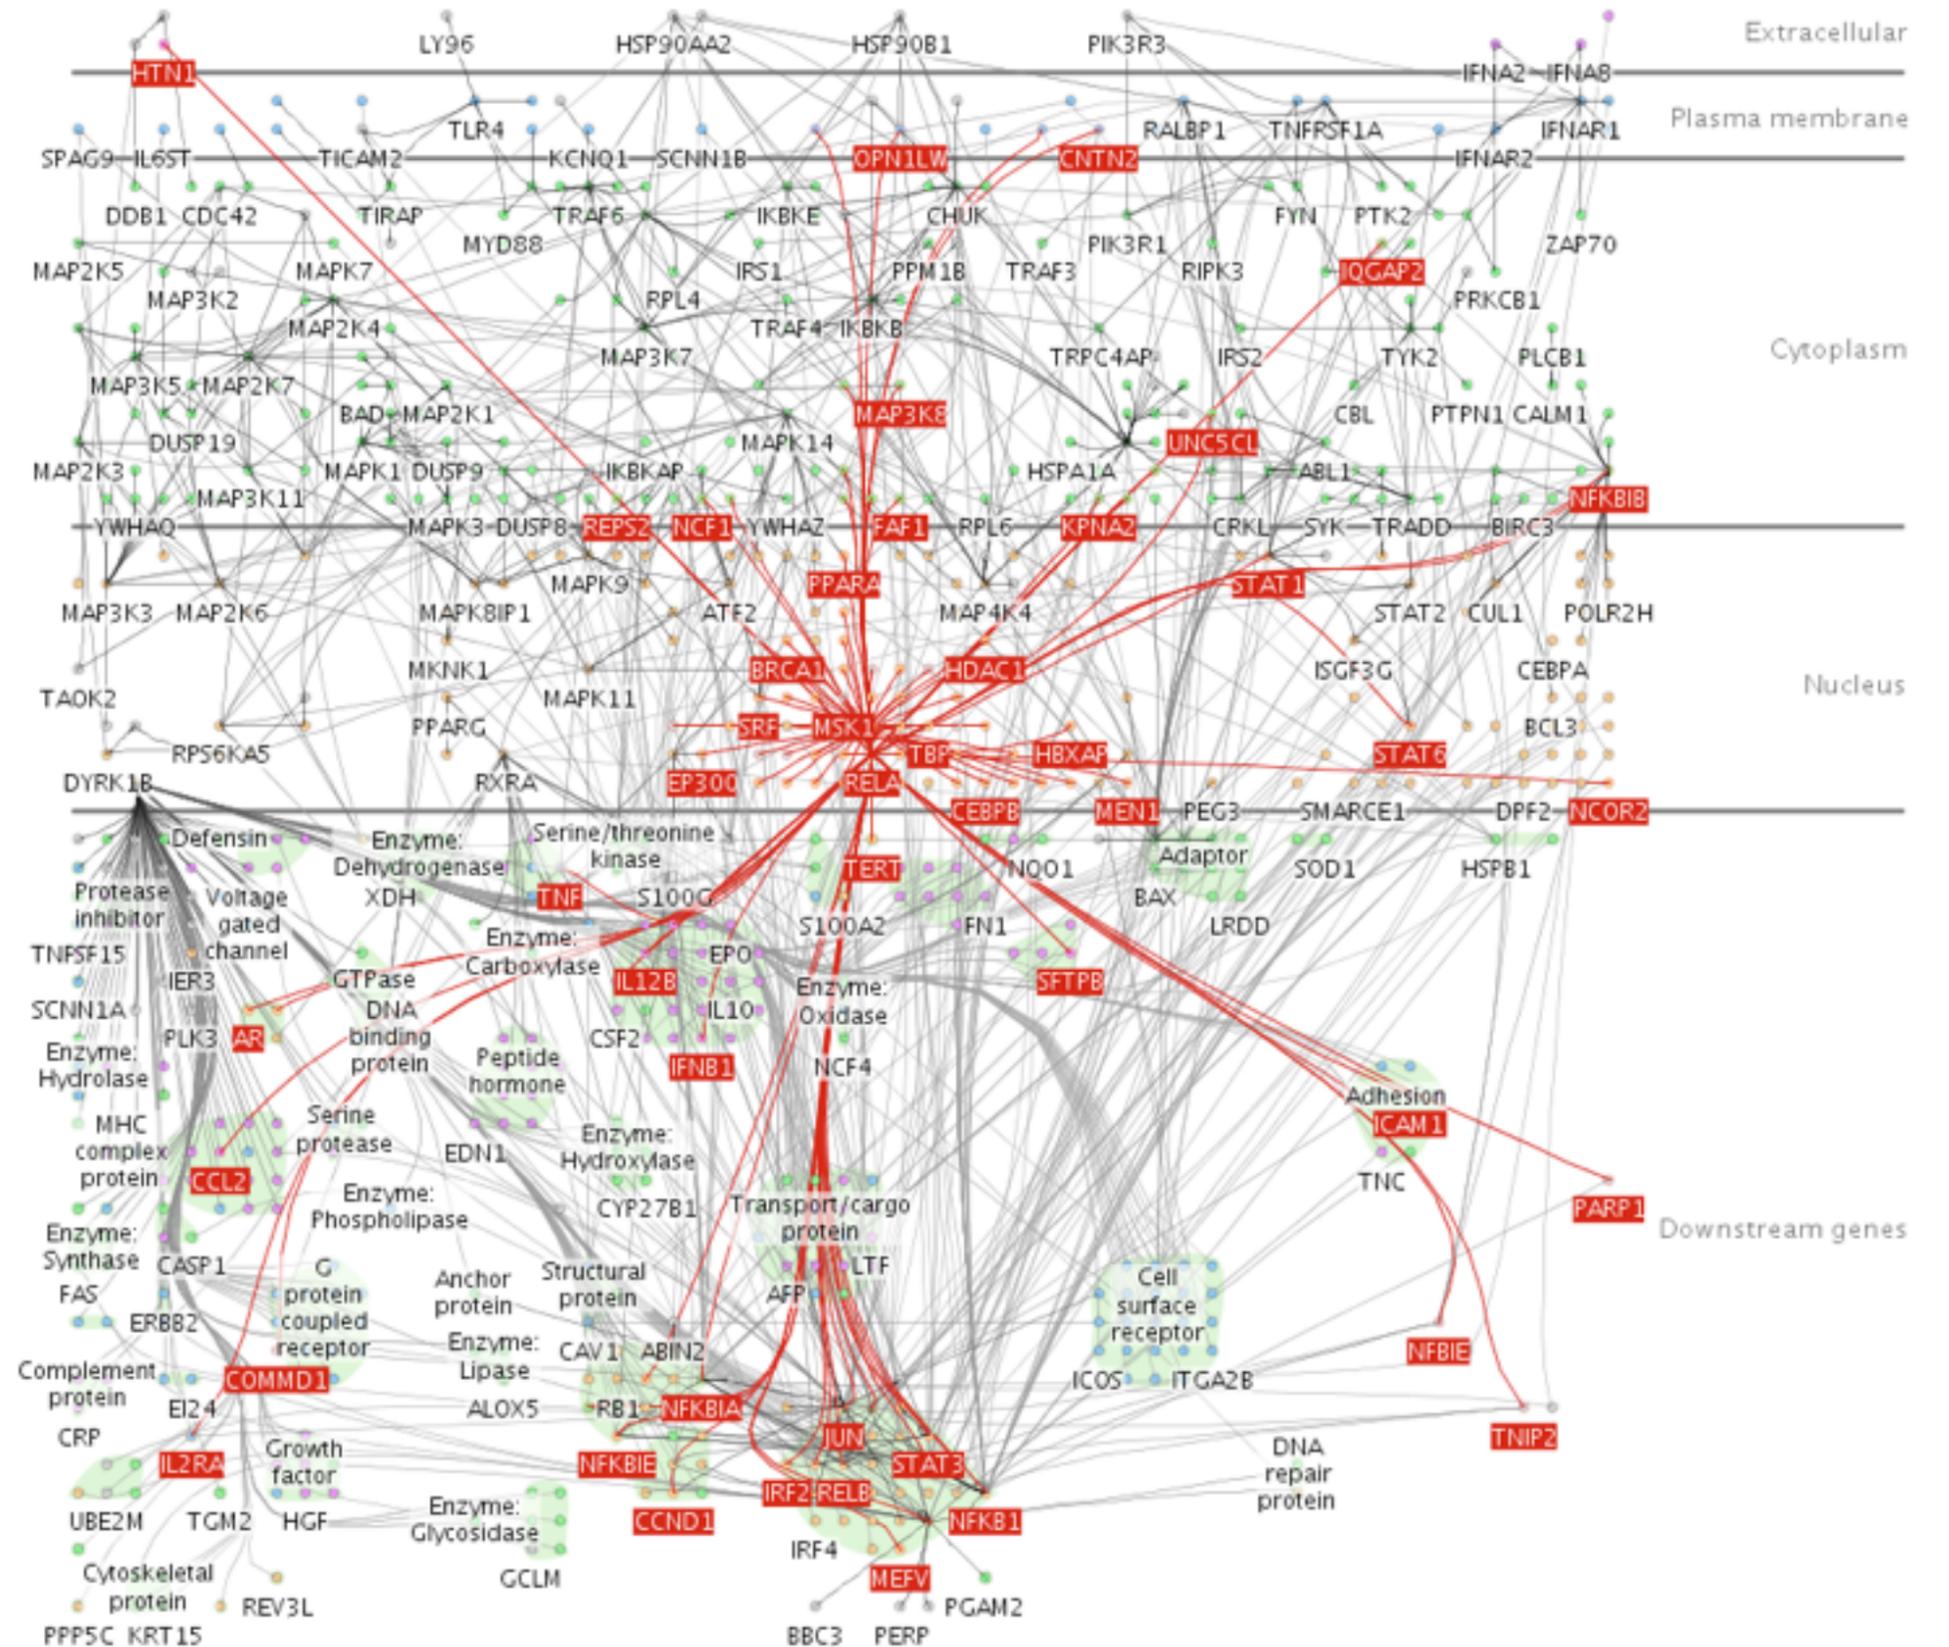

[Cerebral: a Cytoscape plugin for layout of and interaction with biological networks using subcellular localization annotation. Barsky, Gardy, Hancock, and Munzner. *Bioinformatics* 23:8 (2007), 1040–1042.]

Further reading

- Visualization Analysis and Design. Munzner. AK Peters Visualization Series, CRC Press, 2014.
–*Chap 12: Facet Into Multiple Views*
- *A Review of Overview+Detail, Zooming, and Focus+Context Interfaces*. Cockburn, Karlson, and Bederson. ACM Computing Surveys 41:1 (2008), 1–31.
- *A Guide to Visual Multi-Level Interface Design From Synthesis of Empirical Study Evidence*. Lam and Munzner. Synthesis Lectures on Visualization Series, Morgan Claypool, 2010.
- *Zooming versus multiple window interfaces: Cognitive costs of visual comparisons*. Plumlee and Ware. ACM Trans. on Computer-Human Interaction (ToCHI) 13:2 (2006), 179–209.
- *Exploring the Design Space of Composite Visualization*. Javed and Elmqvist. Proc. Pacific Visualization Symp. (PacificVis), pp. 1–9, 2012.
- *Visual Comparison for Information Visualization*. Gleicher, Albers, Walker, Jusufi, Hansen, and Roberts. Information Visualization 10:4 (2011), 289–309.
- *Guidelines for Using Multiple Views in Information Visualizations*. Baldonado, Woodruff, and Kuchinsky. In Proc. ACM Advanced Visual Interfaces (AVI), pp. 110–119, 2000.
- *Cross-Filtered Views for Multidimensional Visual Analysis*. Weaver. IEEE Trans. Visualization and Computer Graphics 16:2 (Proc. InfoVis 2010), 192–204, 2010.
- *Linked Data Views*. Wills. In Handbook of Data Visualization, Computational Statistics, edited by Unwin, Chen, and Härdle, pp. 216–241. Springer-Verlag, 2008.
- *Glyph-based Visualization: Foundations, Design Guidelines, Techniques and Applications*. Borgo, Kehrer, Chung, Maguire, Laramee, Hauser, Ward, and Chen. In Eurographics State of the Art Reports, pp. 39–63, 2013.

Outline

- **Session 1 8:30-10:00am**
Visualization Analysis Framework
 - Introduction: Definitions
 - Analysis: What, Why, How
 - Marks and Channels
- **Session 2 10:30am-12:00pm**
Spatial Layout
 - Arrange Tables
 - Arrange Spatial Data
 - Arrange Networks and Trees
- **Session 3 1:00-2:30pm**
Color & Interaction
 - Map Color
 - Manipulate: Change, Select, Navigate
 - Facet: Juxtapose, Partition, Superimpose
- **Session 4 3:00-4:30pm**
Guidelines and Examples
 - **Reduce: Filter, Aggregate**
 - Rules of Thumb
 - Q&A

Reduce items and attributes

- reduce/increase: inverses
- filter
 - pro: straightforward and intuitive
 - to understand and compute
 - con: out of sight, out of mind
- aggregation
 - pro: inform about whole set
 - con: difficult to avoid losing signal
- not mutually exclusive
 - combine filter, aggregate
 - combine reduce, change, facet


Reducing Items and Attributes

① Filter

→ Items




→ Attributes

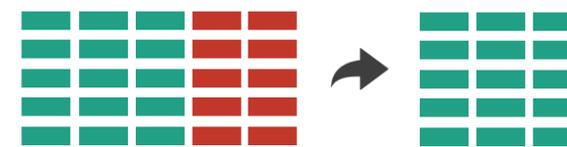


② Aggregate

→ Items

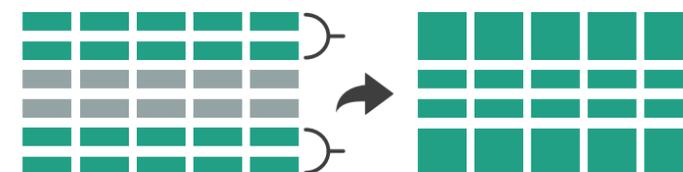

→ Attributes

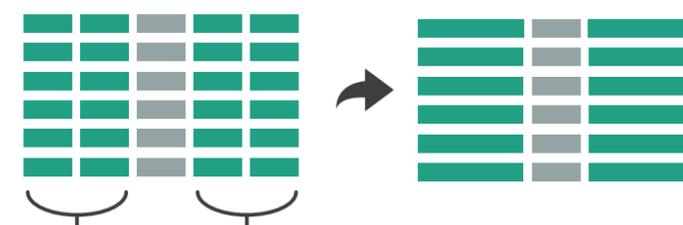

Reduce

① Filter



② Aggregate





③ Embed



Idiom: dynamic filtering

System: FilmFinder



- item filtering
- browse through tightly coupled interaction
 - alternative to queries that might return far too many or too few

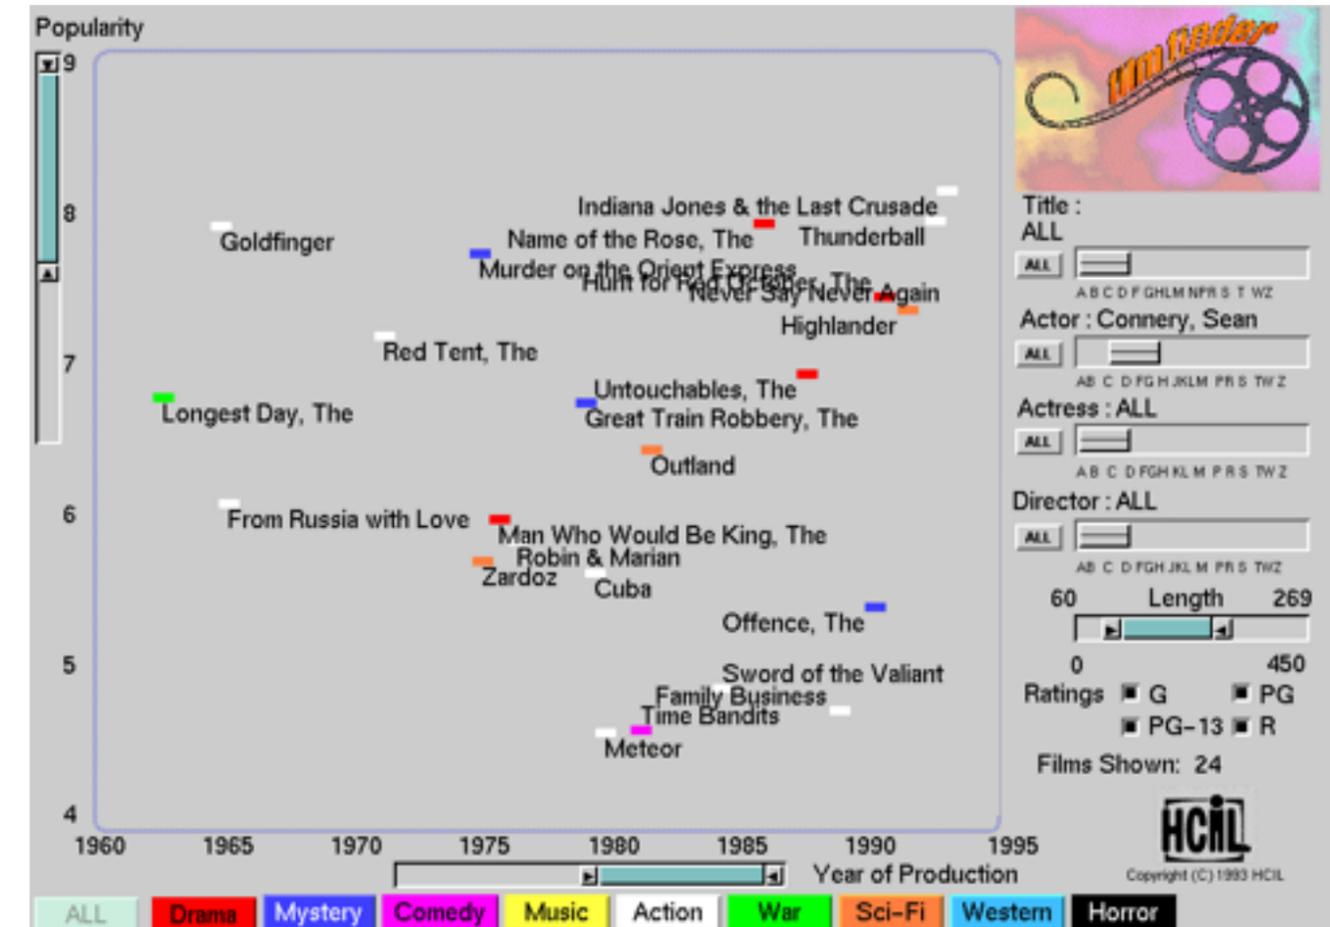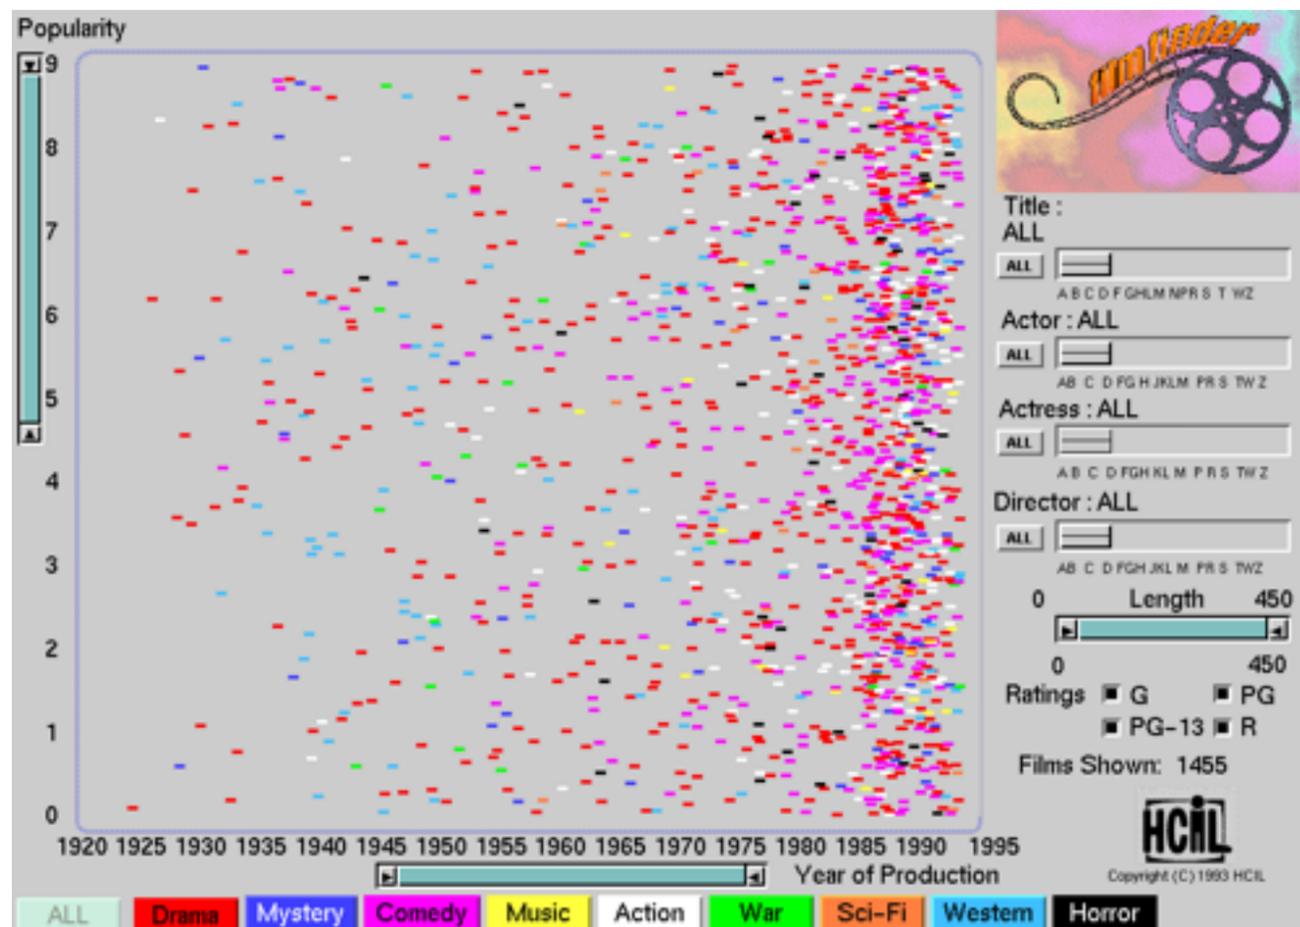

[Visual information seeking: Tight coupling of dynamic query filters with starfield displays. Ahlberg and Shneiderman. Proc. ACM Conf. on Human Factors in Computing Systems (CHI), pp. 313–317, 1994.]

Idiom: **DOSFA**


- attribute filtering
- encoding: star glyphs

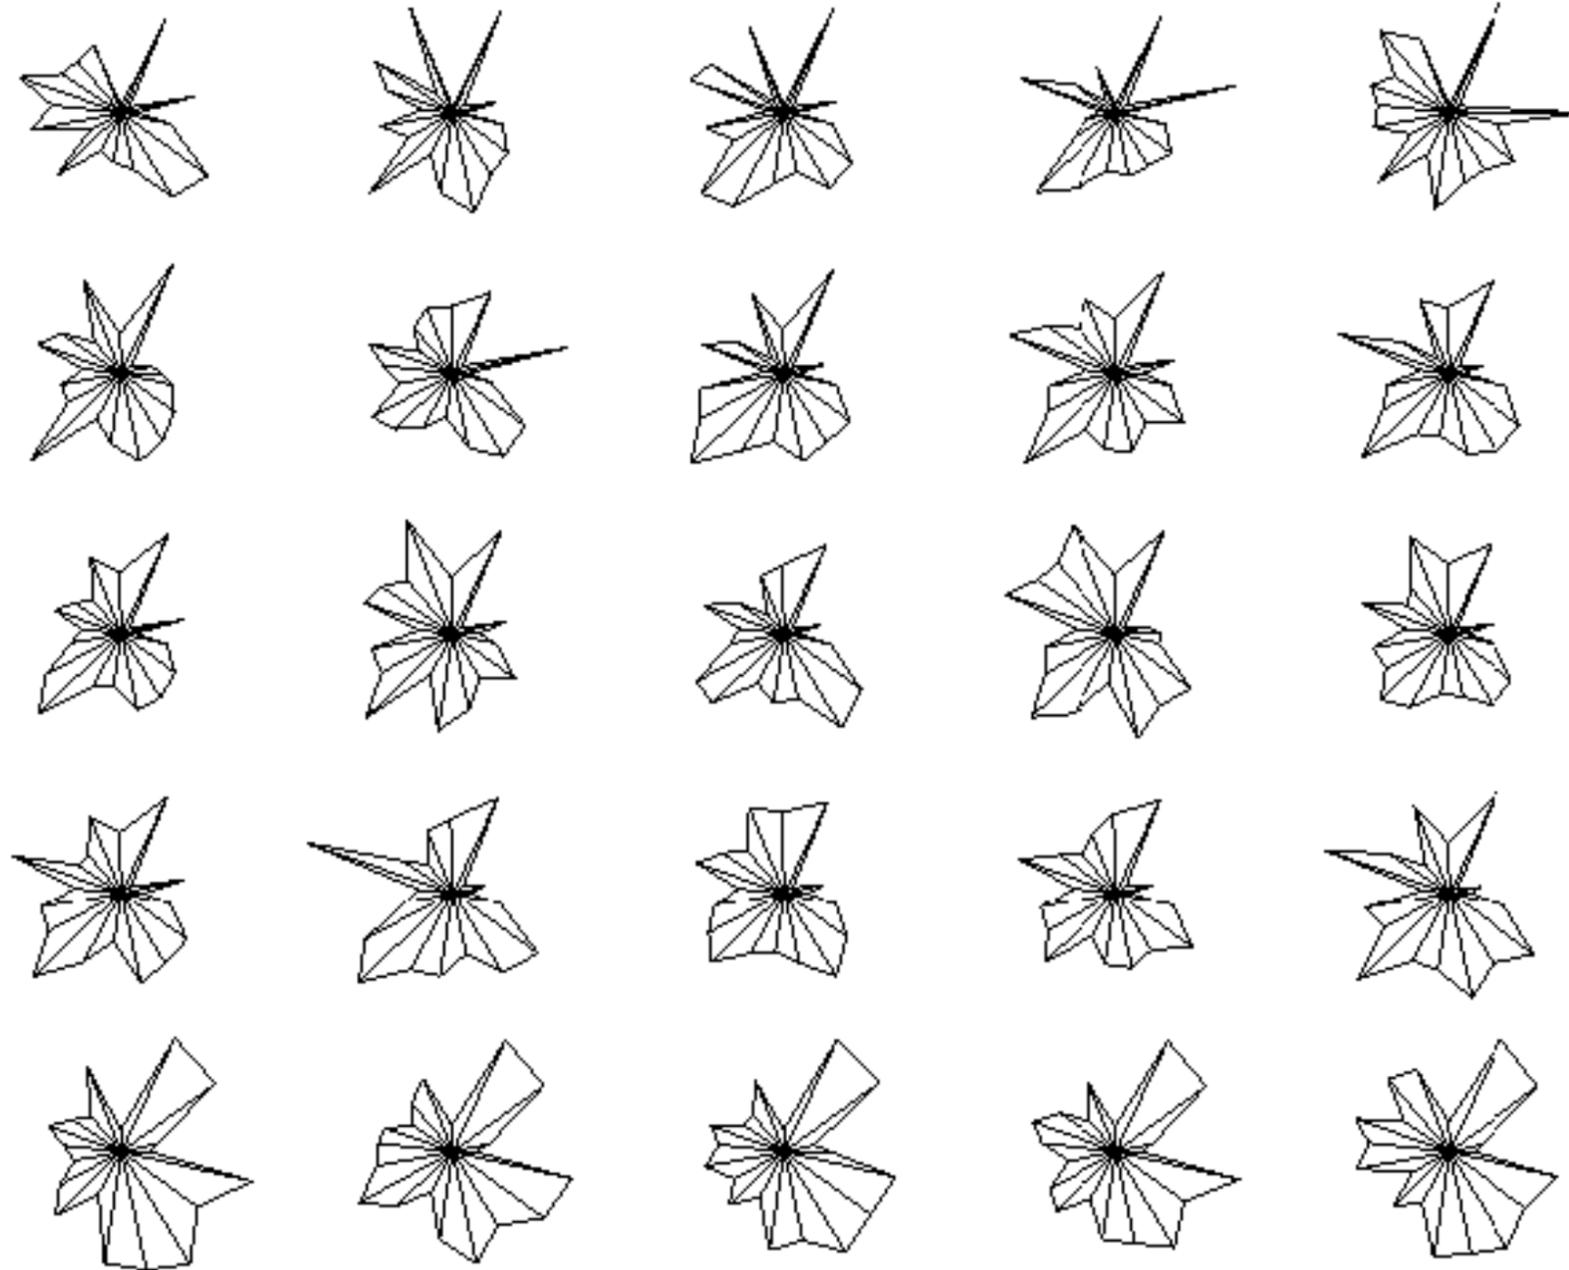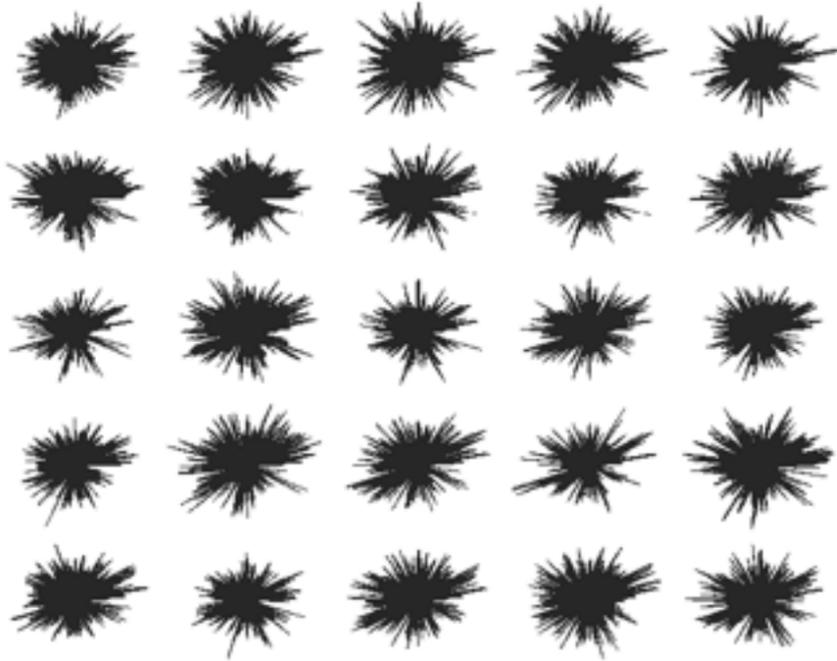

[Interactive Hierarchical Dimension Ordering, Spacing and Filtering for Exploration Of High Dimensional Datasets. Yang, Peng, Ward, and. Rundensteiner. Proc. IEEE Symp. Information Visualization (InfoVis), pp. 105–112, 2003.]


Idiom: **histogram**

- static item aggregation
- task: find distribution
- data: table
- derived data
 - new table: keys are bins, values are counts
- bin size crucial
 - pattern can change dramatically depending on discretization
 - opportunity for interaction: control bin size on the fly

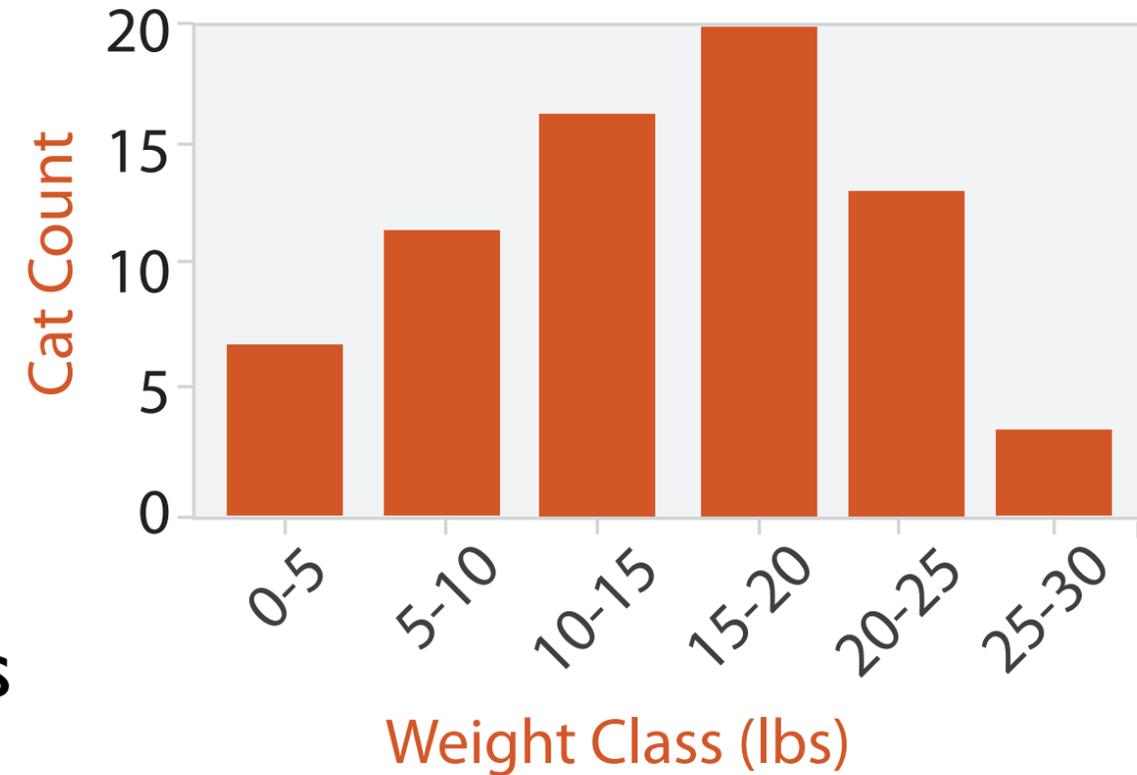

Continuous scatterplot




- static item aggregation
- data: table
- derived data: table
 - key attribs x,y for pixels
 - quant attrib: overplot density
- dense space-filling 2D matrix
- color: sequential categorical hue + ordered luminance

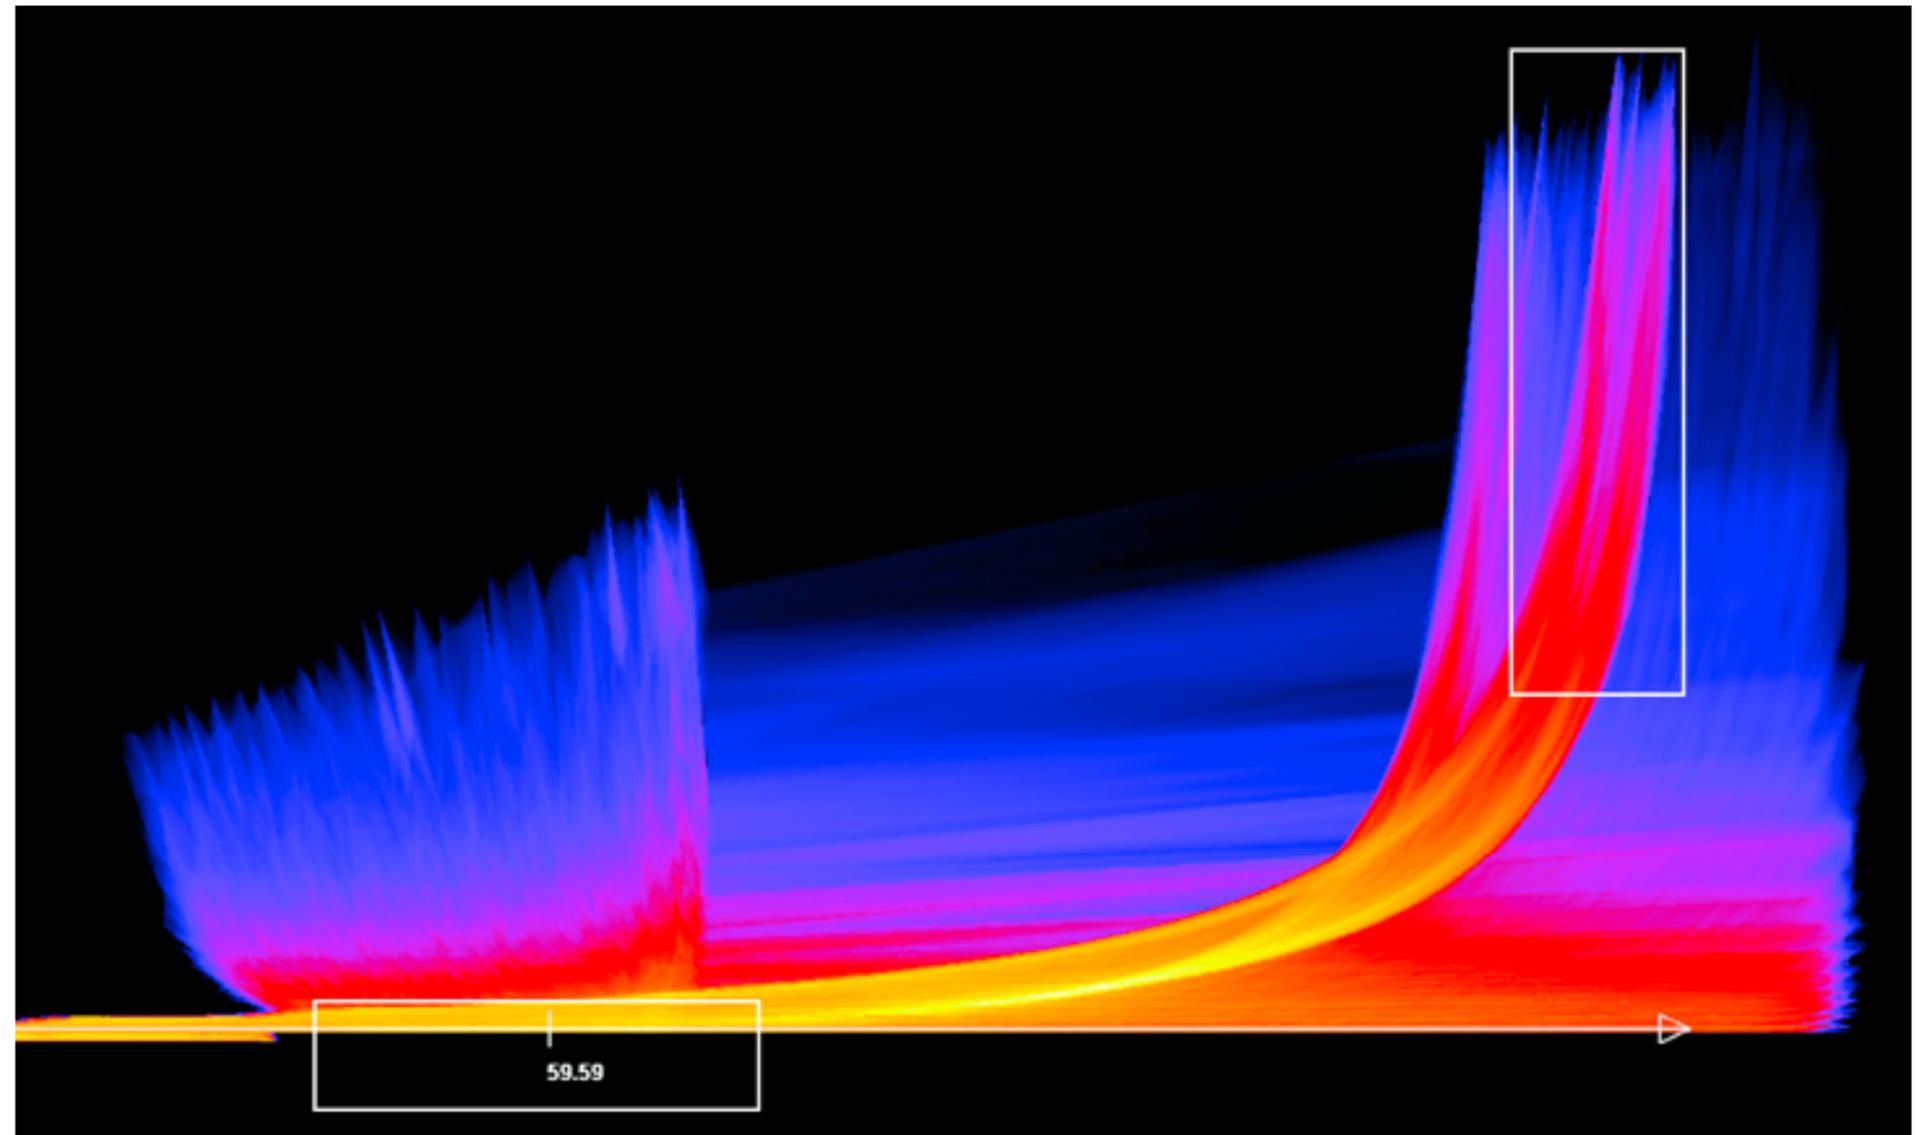

colormap
[Continuous Scatterplots. Bachthaler and Weiskopf. IEEE TVCG (Proc.Vis 08) 14:6 (2008), 1428–1435. 2008.]

Idiom: scented widgets


- augment widgets for filtering to show *information scent*
 - cues to show whether value in drilling down further vs looking elsewhere
- concise, in part of screen normally considered control panel

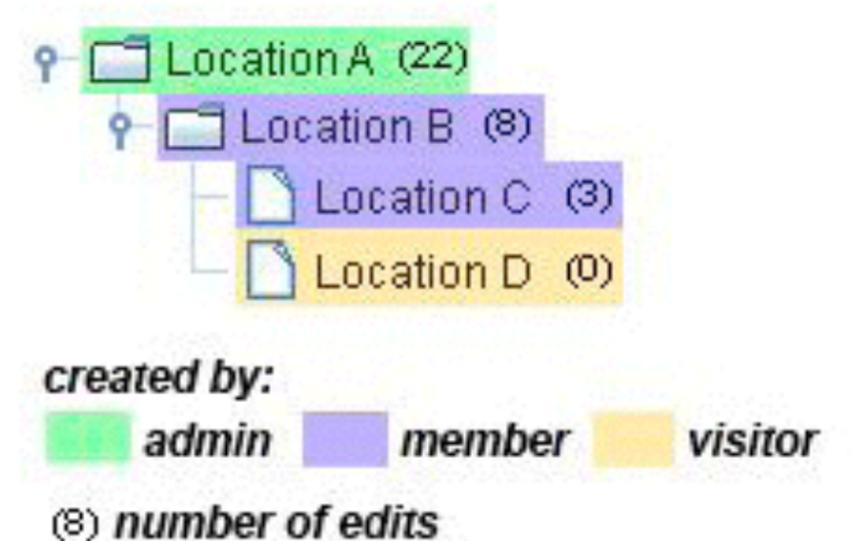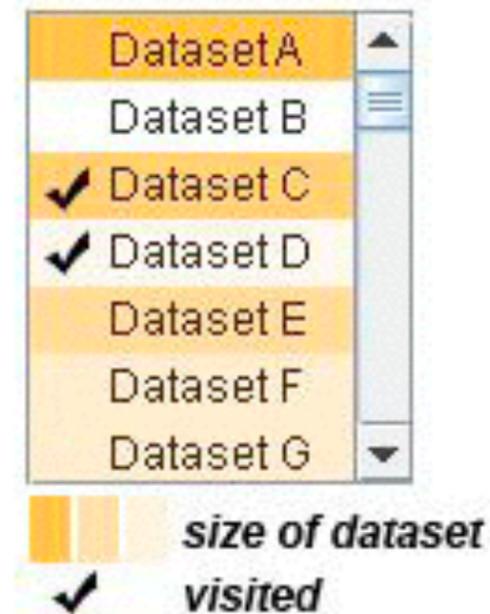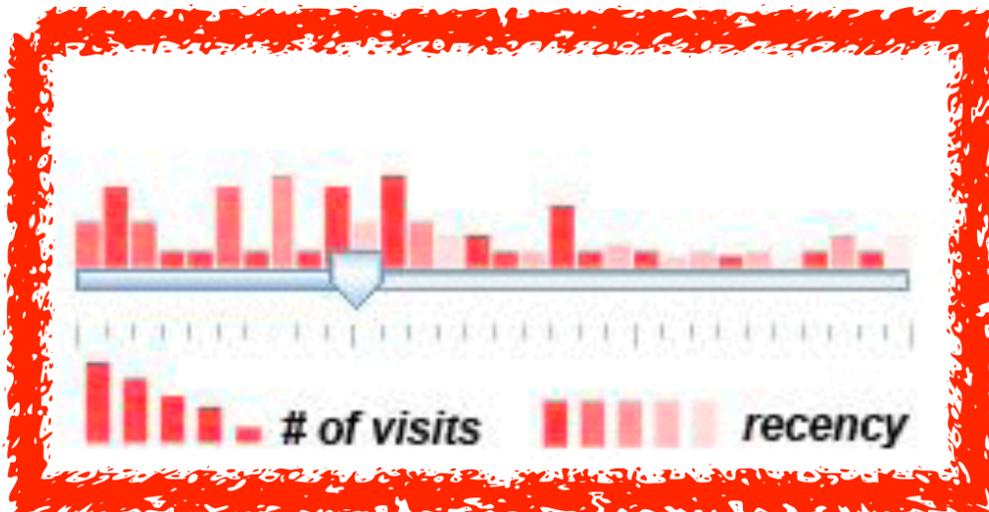

[Scented Widgets: Improving Navigation Cues with Embedded Visualizations. Willett, Heer, and Agrawala. *IEEE Trans. Visualization and Computer Graphics (Proc. InfoVis 2007)* 13:6 (2007), 1129–1136.]

Idiom: **boxplot**




- static item aggregation
- task: find distribution
- data: table
- derived data
 - 5 quant attribs
 - median: central line
 - lower and upper quartile: boxes
 - lower upper fences: whiskers
 - values beyond which items are outliers
 - outliers beyond fence cutoffs explicitly shown

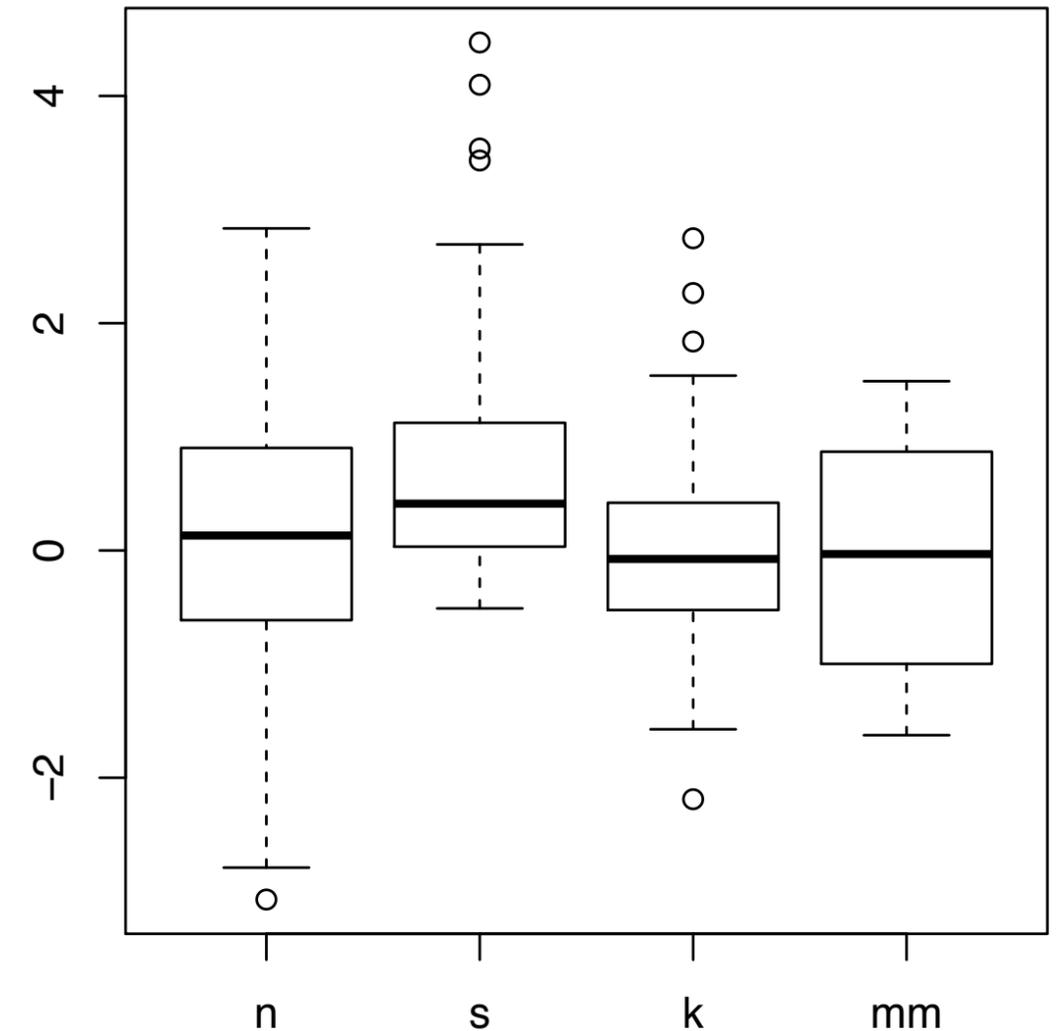

[40 years of boxplots. Wickham and Stryjewski. 2012. had.co.nz]

Idiom: Hierarchical parallel coordinates


- dynamic item aggregation
- derived data: *hierarchical clustering*
- encoding:
 - cluster band with variable transparency, line at mean, width by min/max values
 - color by proximity in hierarchy

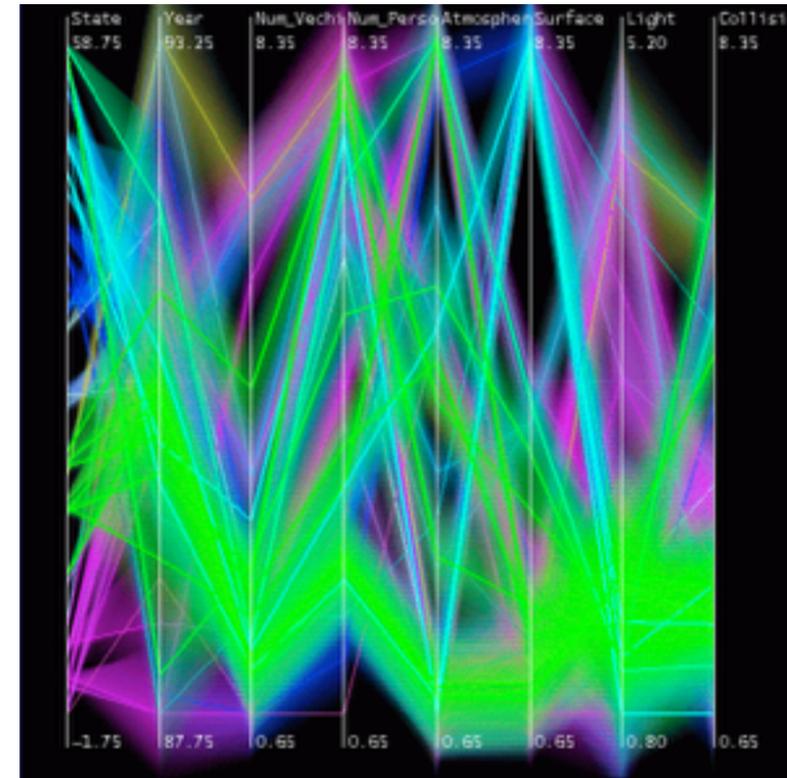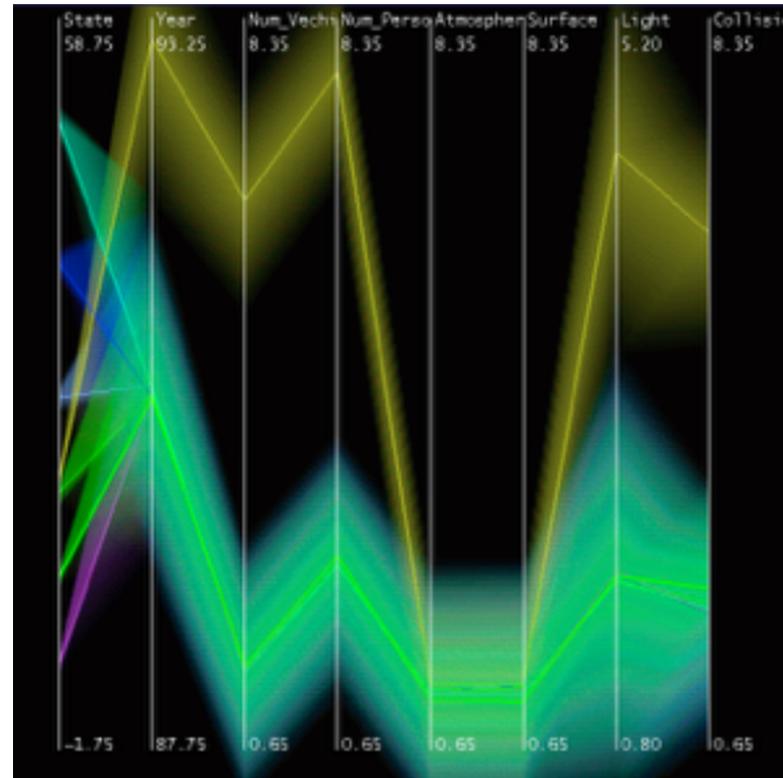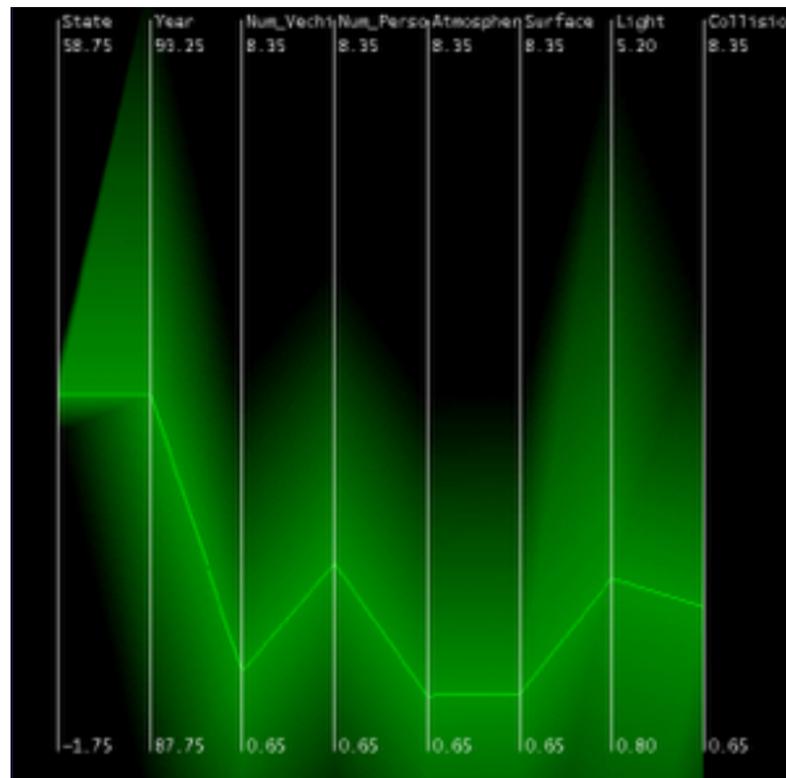

[Hierarchical Parallel Coordinates for Exploration of Large Datasets. Fua, Ward, and Rundensteiner. Proc. IEEE Visualization Conference (Vis '99), pp. 43– 50, 1999.]

Spatial aggregation

- MAUP: Modifiable Areal Unit Problem
 - gerrymandering (manipulating voting district boundaries) is one example!

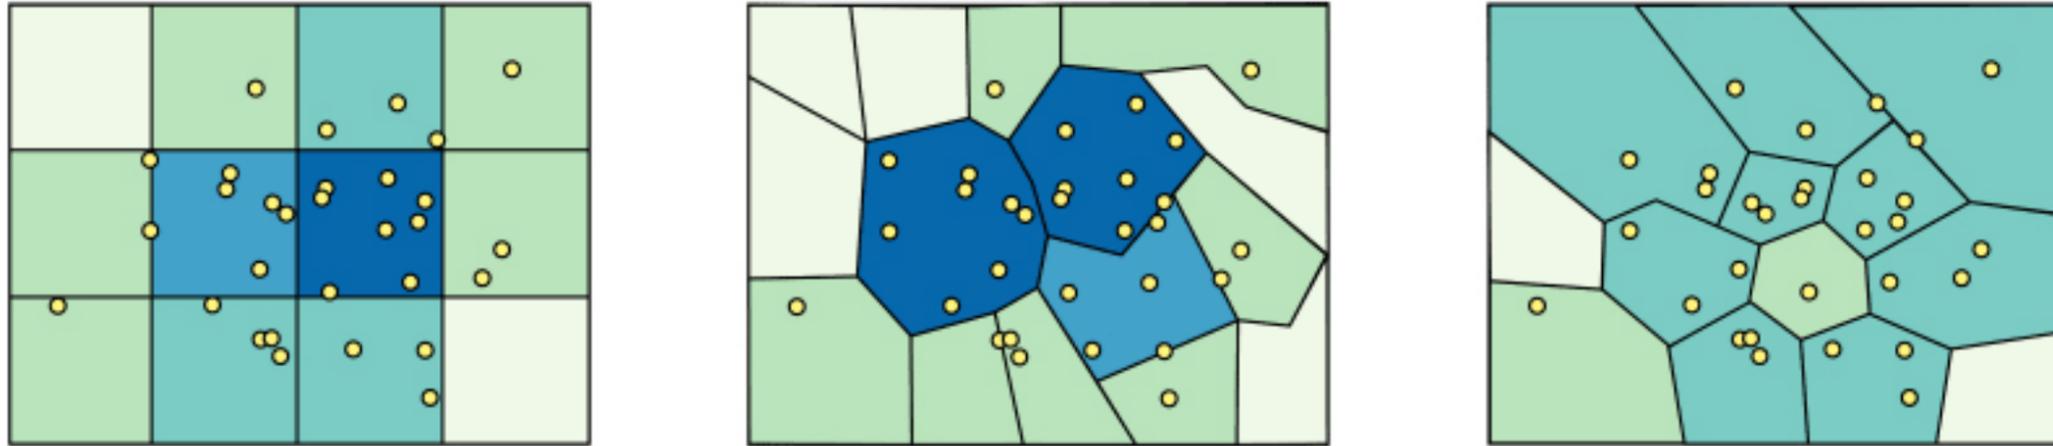

[http://www.e-education.psu.edu/geog486/l4_p7.html, Fig 4.cg.6]

Dimensionality reduction

- attribute aggregation
 - derive low-dimensional target space from high-dimensional measured space
 - use when you can't directly measure what you care about
 - true dimensionality of dataset conjectured to be smaller than dimensionality of measurements
 - latent factors, hidden variables

Tumor
Measurement Data

data: 9D measured space




DR



Malignant


Benign

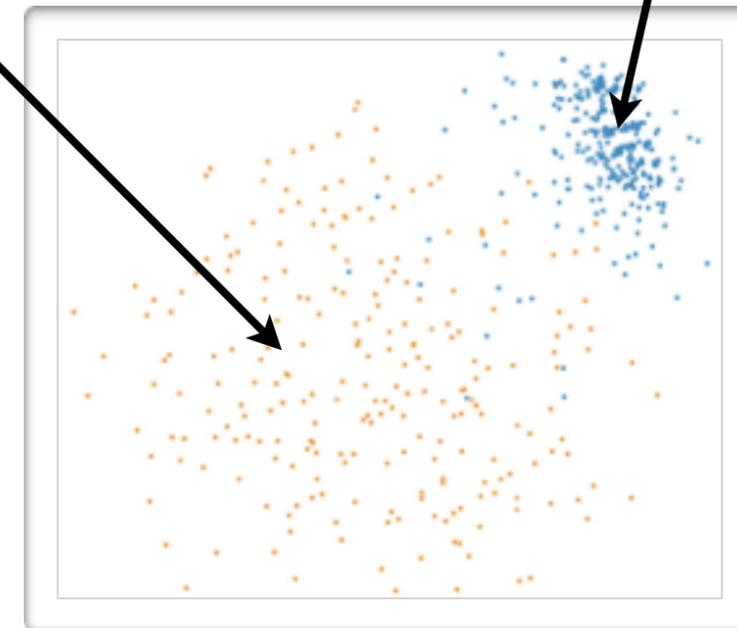

derived data: 2D target space

Idiom: Dimensionality reduction for documents

Task 1

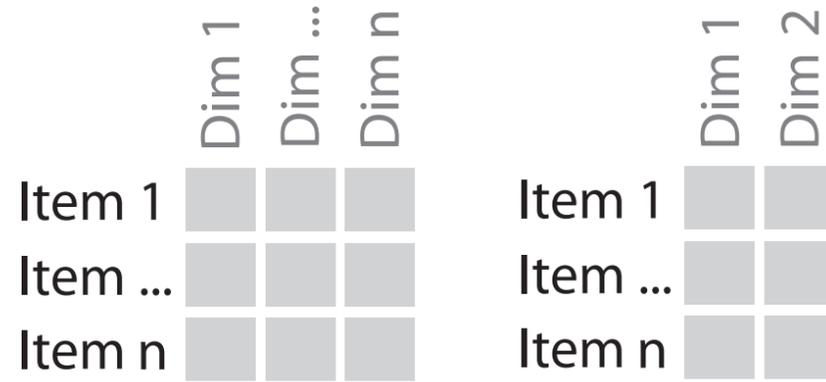

In HD data → **Out** 2D data


What?

Why?

- **In** High-dimensional data
- **Out** 2D data

- Produce
- Derive

Task 2

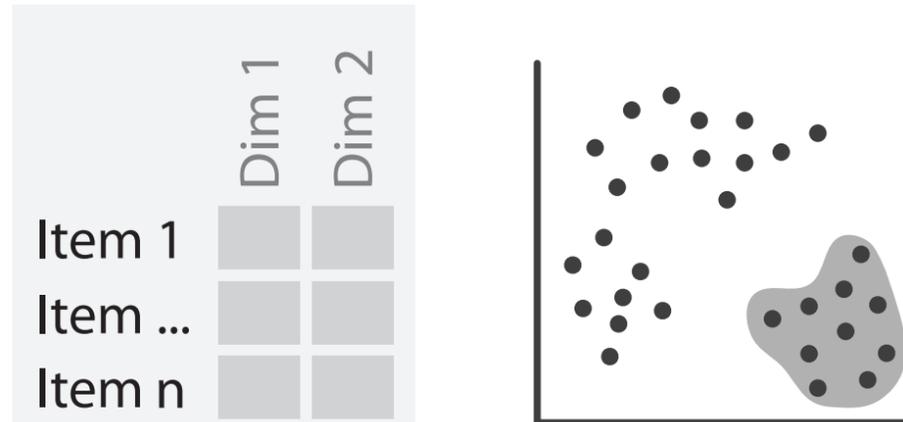

In 2D data → **Out** Scatterplot Clusters & points

What?

Why?

How?

- **In** 2D data
- **Out** Scatterplot
- **Out** Clusters & points

- Discover
- Explore
- Identify

- Encode
- Navigate
- Select

Task 3



In Scatterplot Clusters & points → **Out** Labels for clusters

What?

Why?

- **In** Scatterplot
- **In** Clusters & points
- **Out** Labels for clusters

- Produce
- Annotate

Further reading

- Visualization Analysis and Design. Munzner. AK Peters Visualization Series, CRC Press, 2014.
 - Chap 13: Reduce Items and Attributes*
- *Hierarchical Aggregation for Information Visualization: Overview, Techniques and Design Guidelines*. Elmqvist and Fekete. IEEE Transactions on Visualization and Computer Graphics 16:3 (2010), 439–454.
- *A Review of Overview+Detail, Zooming, and Focus+Context Interfaces*. Cockburn, Karlson, and Bederson. ACM Computing Surveys 41:1 (2008), 1–31.
- *A Guide to Visual Multi-Level Interface Design From Synthesis of Empirical Study Evidence*. Lam and Munzner. Synthesis Lectures on Visualization Series, Morgan Claypool, 2010.

Outline

- **Session 1 8:30-10:00am**
Visualization Analysis Framework
 - Introduction: Definitions
 - Analysis: What, Why, How
 - Marks and Channels
- **Session 2 10:30am-12:00pm**
Spatial Layout
 - Arrange Tables
 - Arrange Spatial Data
 - Arrange Networks and Trees
- **Session 3 1:00-2:30pm**
Color & Interaction
 - Map Color
 - Manipulate: Change, Select, Navigate
 - Facet: Juxtapose, Partition, Superimpose
- **Session 4 3:00-4:30pm**
Guidelines and Examples
 - Reduce: Filter, Aggregate
 - **Rules of Thumb**
 - Q&A

Rules of Thumb

- **No unjustified 3D**
 - Power of the plane
 - Disparity of depth
 - Occlusion hides information
 - Perspective distortion dangers
 - Tilted text isn't legible
- **No unjustified 2D**
- **Eyes beat memory**
- **Resolution over immersion**
- **Overview first, zoom and filter, details on demand**
- **Responsiveness is required**
- **Function first, form next**

No unjustified 3D: Power of the plane

- high-ranked spatial position channels: planar spatial position – not depth!

➔ Magnitude Channels: Ordered Attributes

Position on common scale



Position on unaligned scale



Length (1D size)



Tilt/angle




Area (2D size)



Depth (3D position)




Steven's Psychophysical Power Law: $S = I^N$

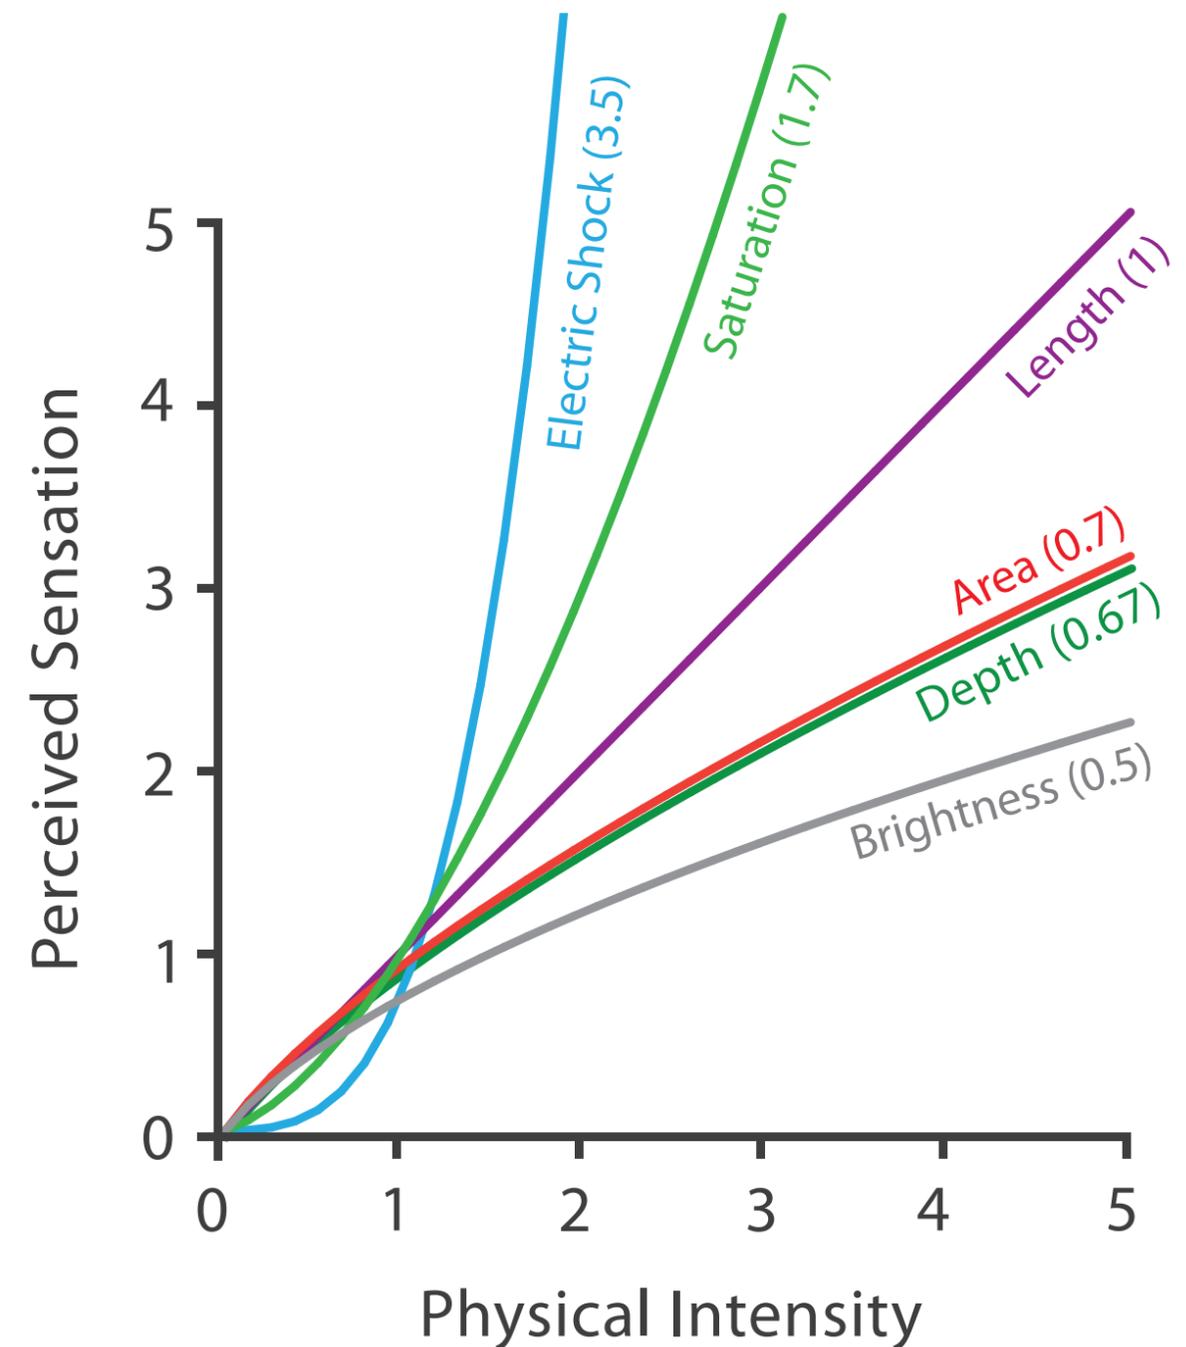


No unjustified 3D: Danger of depth

- we don't really live in 3D: we **see** in 2.05D
 - acquire more info on image plane quickly from eye movements
 - acquire more info for depth slower, from head/body motion

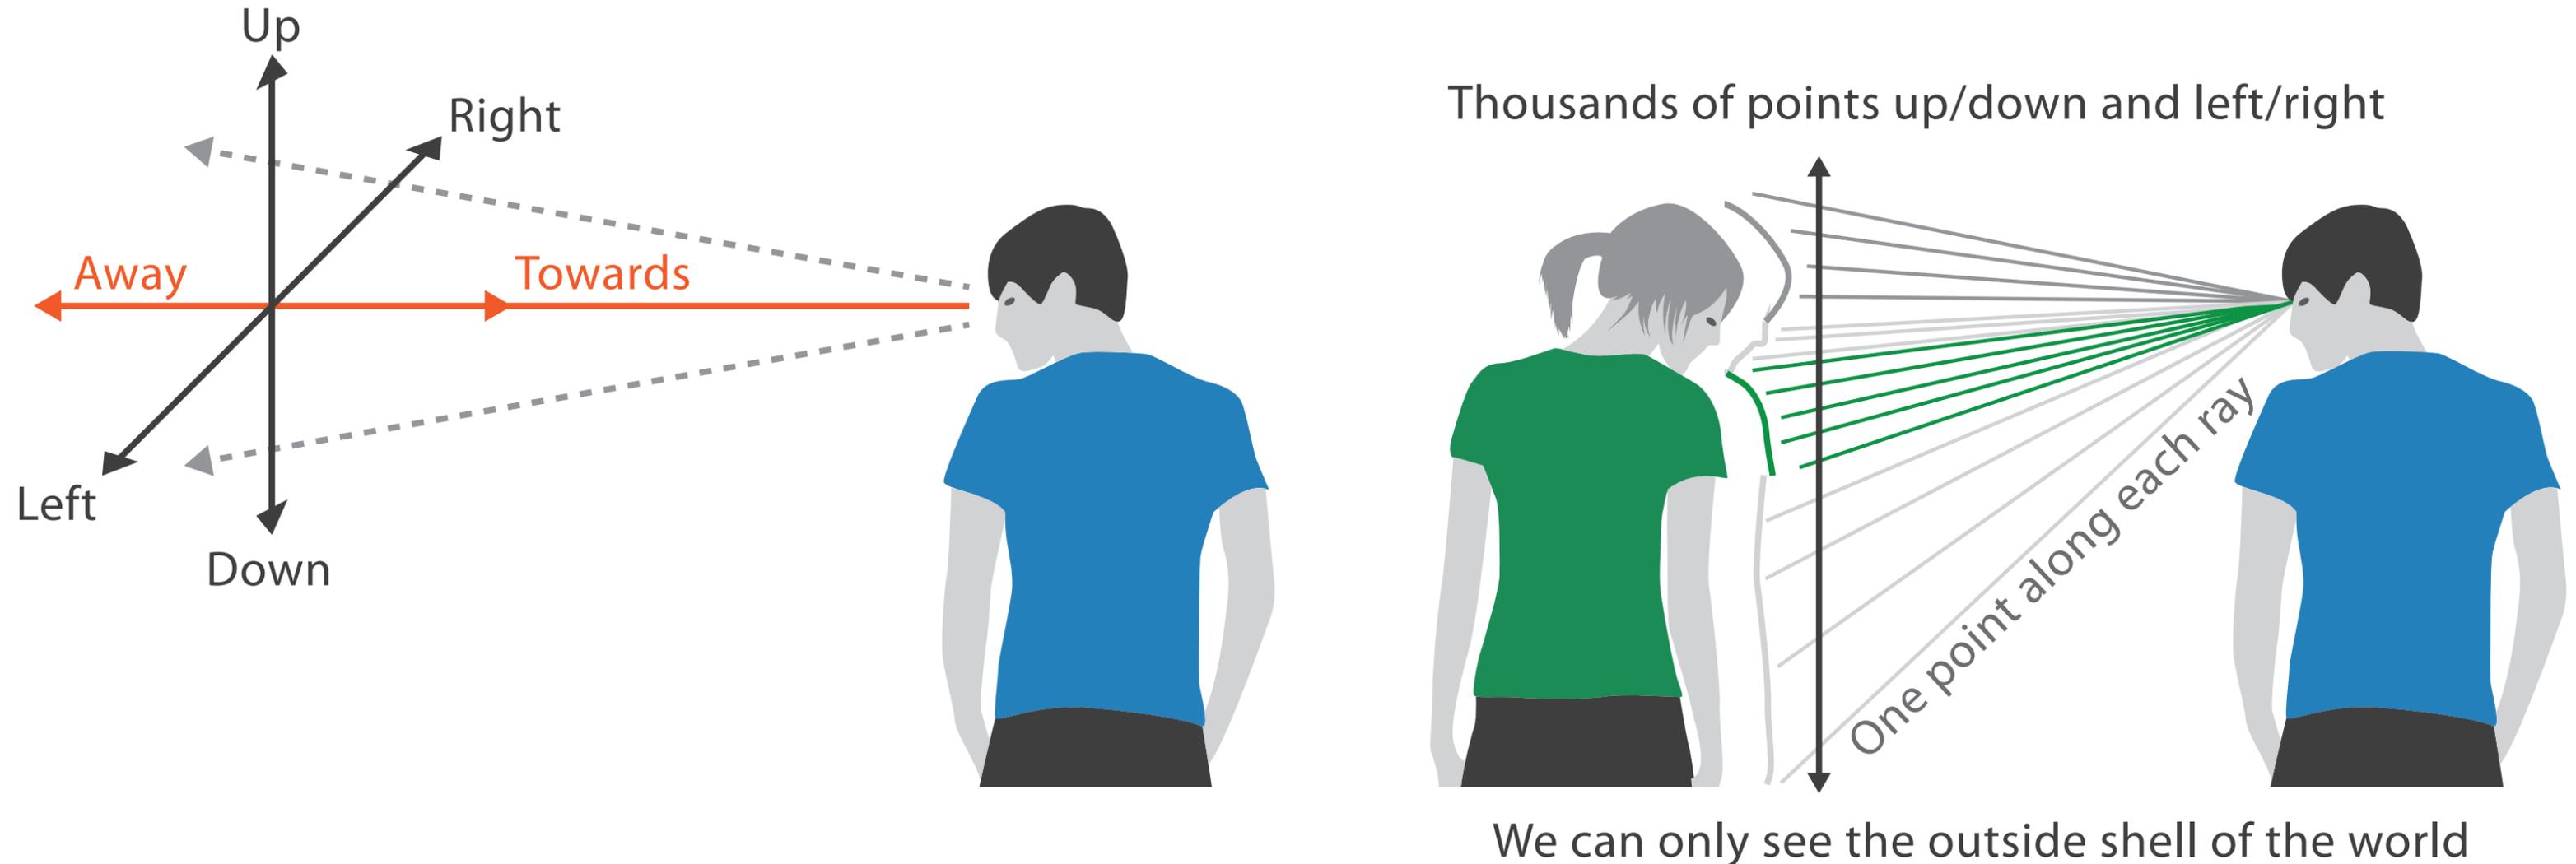

Occlusion hides information


- occlusion
- interaction complexity

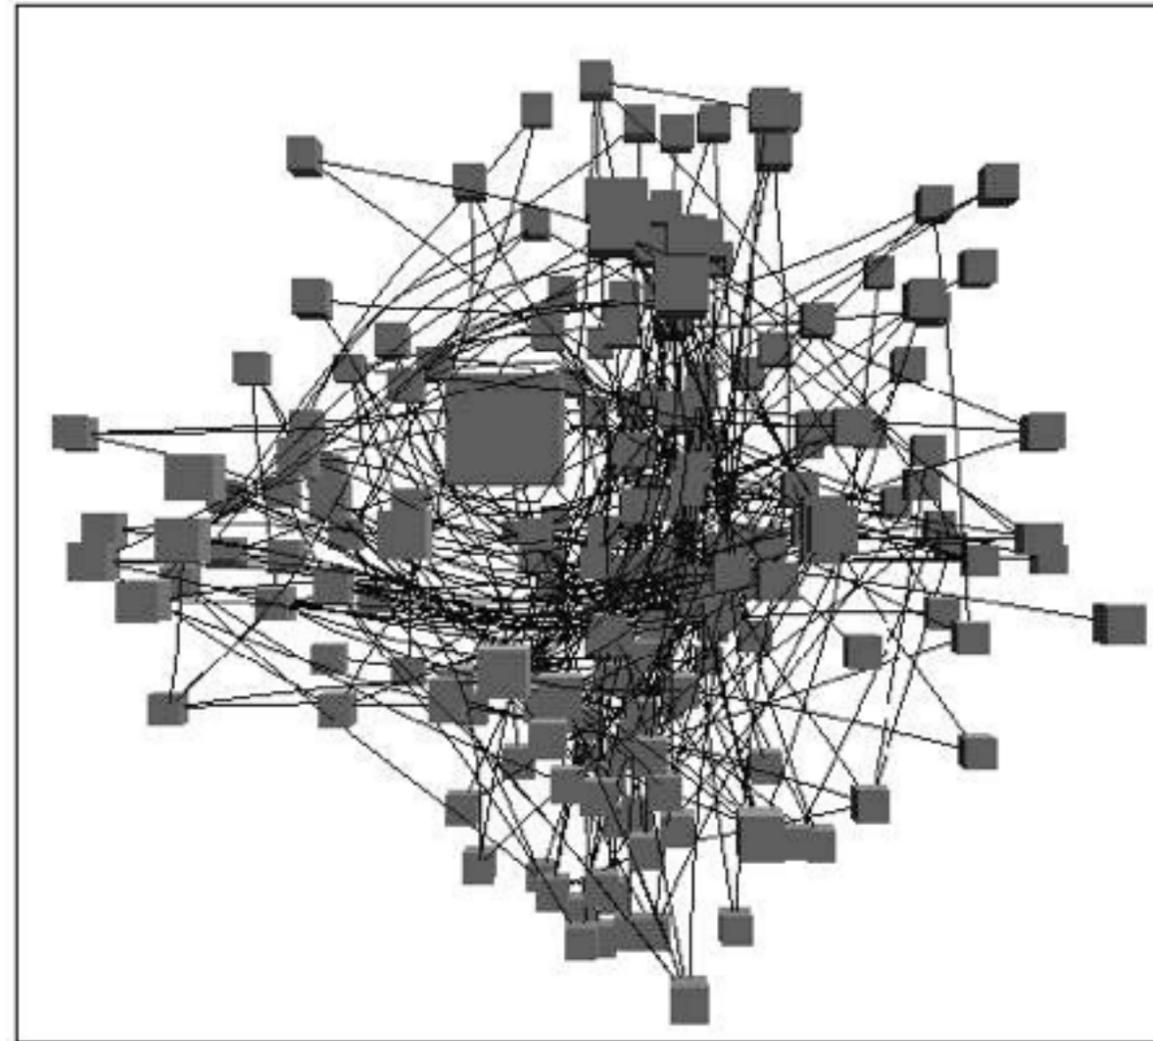

[Distortion Viewing Techniques for 3D Data. Carpendale et al. InfoVis 1996.]

Perspective distortion loses information

- perspective distortion
 - interferes with all size channel encodings
 - power of the plane is lost!

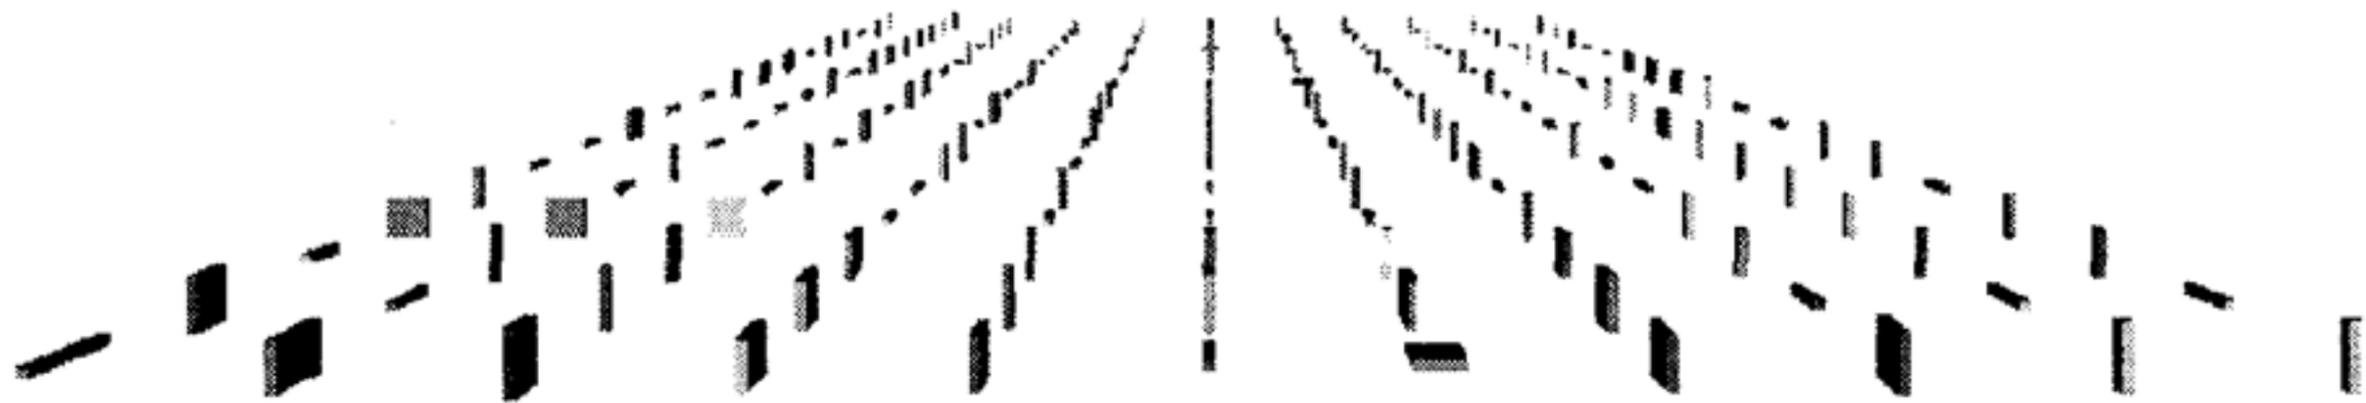

*[Visualizing the Results of Multimedia Web Search Engines.
Mukherjea, Hirata, and Hara. InfoVis 96]*


3D vs 2D bar charts

- 3D bars never a good idea!

Graph Design I.Q. Test

Question 7: Which graph makes it easier to determine R&D's travel expense?


2006 Expenses by Department

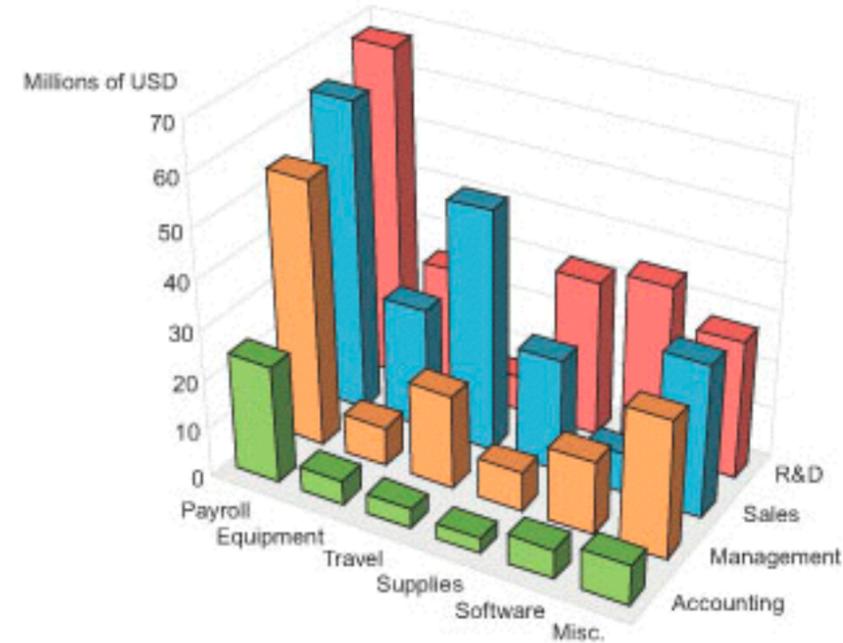

3-D Bar Graph (left)

2-D Bar Graphs (below)

2006 Expenses by Department in Millions of USD

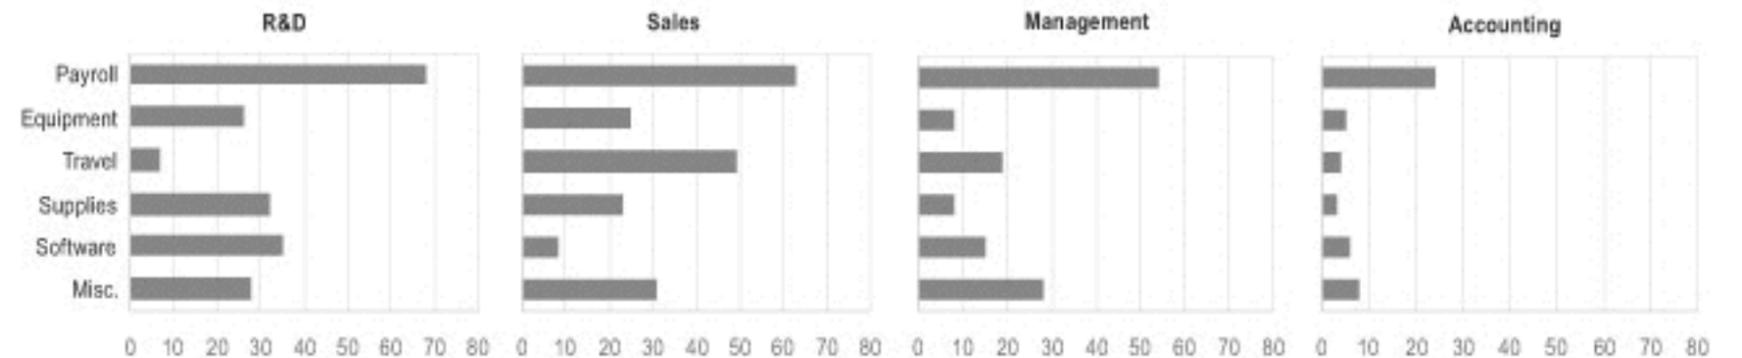

[<http://perceptualedge.com/files/GraphDesignIQ.html>]


Tilted text isn't legible

- text legibility
 - far worse when tilted from image plane

- further reading

[Exploring and Reducing the Effects of Orientation on Text Readability in Volumetric Displays.


Grossman et al. CHI 2007]

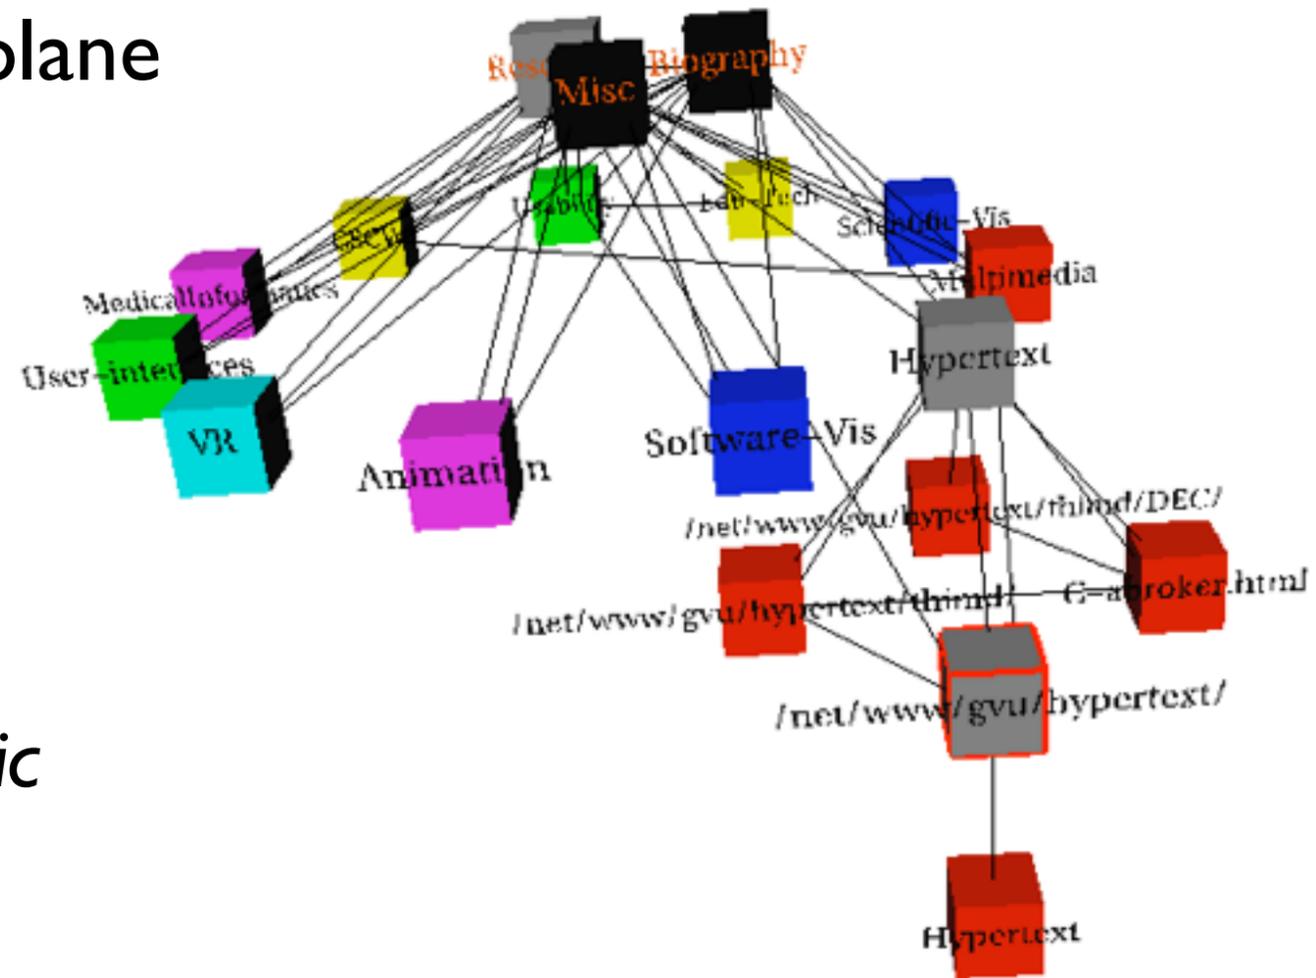

[Visualizing the World-Wide Web with the Navigational View Builder. Mukherjea and Foley. Computer Networks and ISDN Systems, 1995.]

No unjustified 3D example: Time-series data


- extruded curves: detailed comparisons impossible

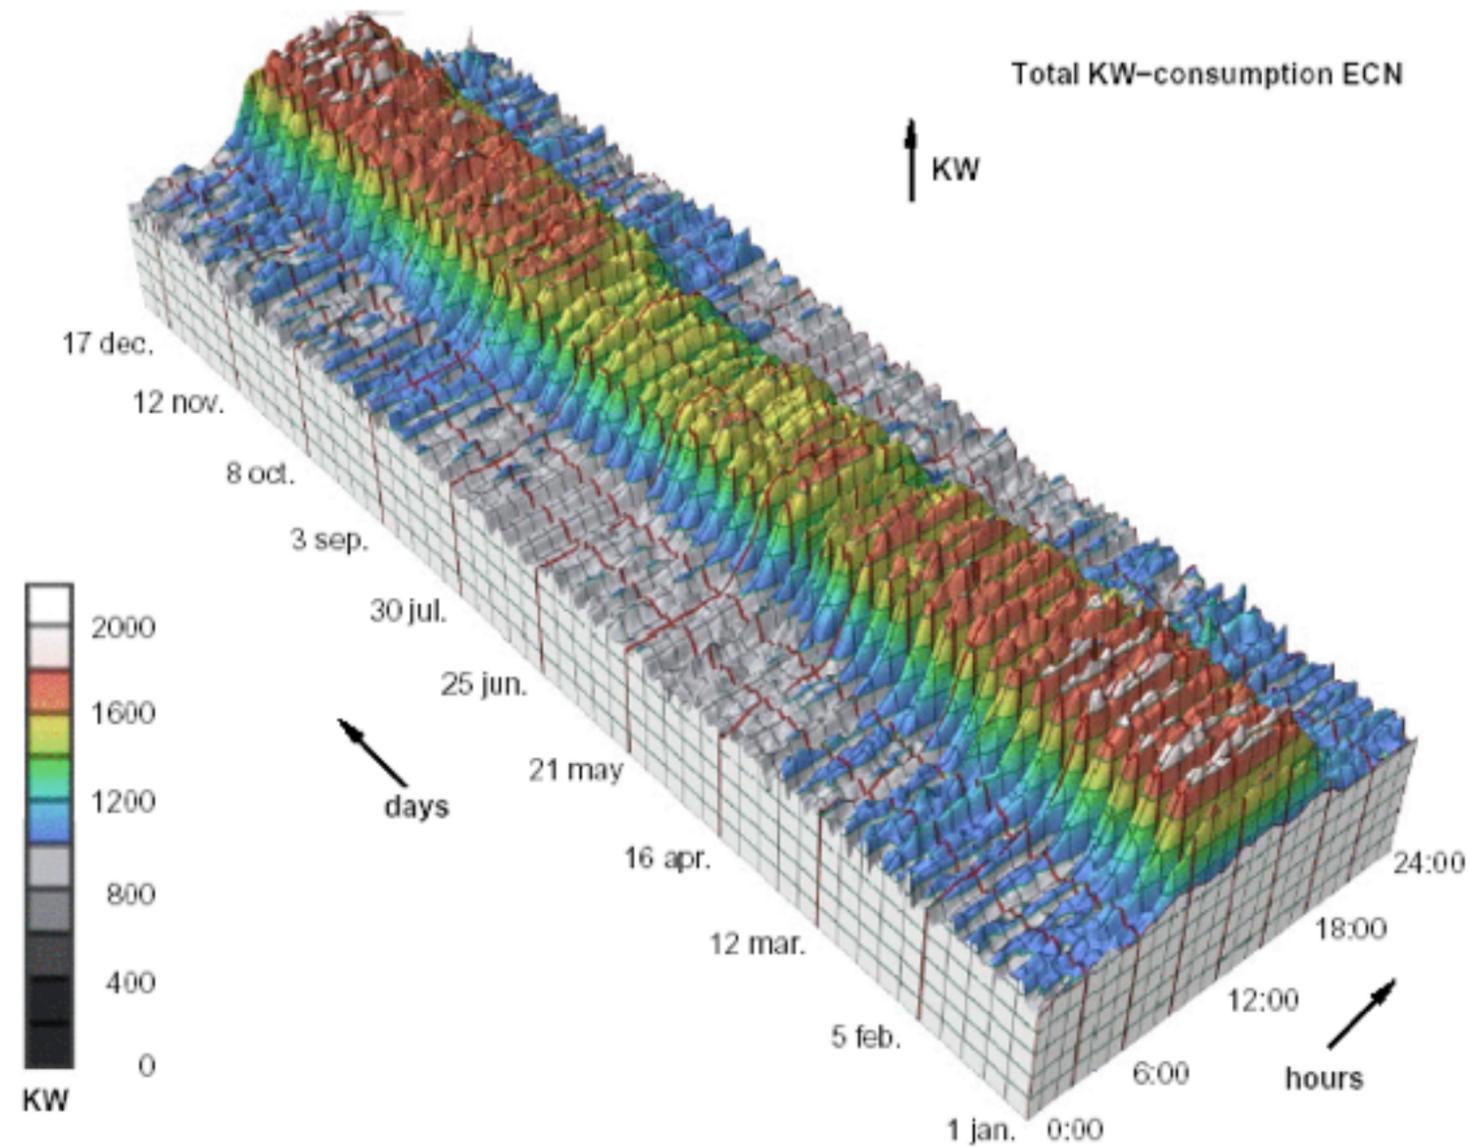

[Cluster and Calendar based Visualization of Time Series Data. van Wijk and van Selow, Proc. InfoVis 99.]

No unjustified 3D example: Transform for new data abstraction

- derived data: cluster hierarchy
- juxtapose multiple views: calendar, superimposed 2D curves

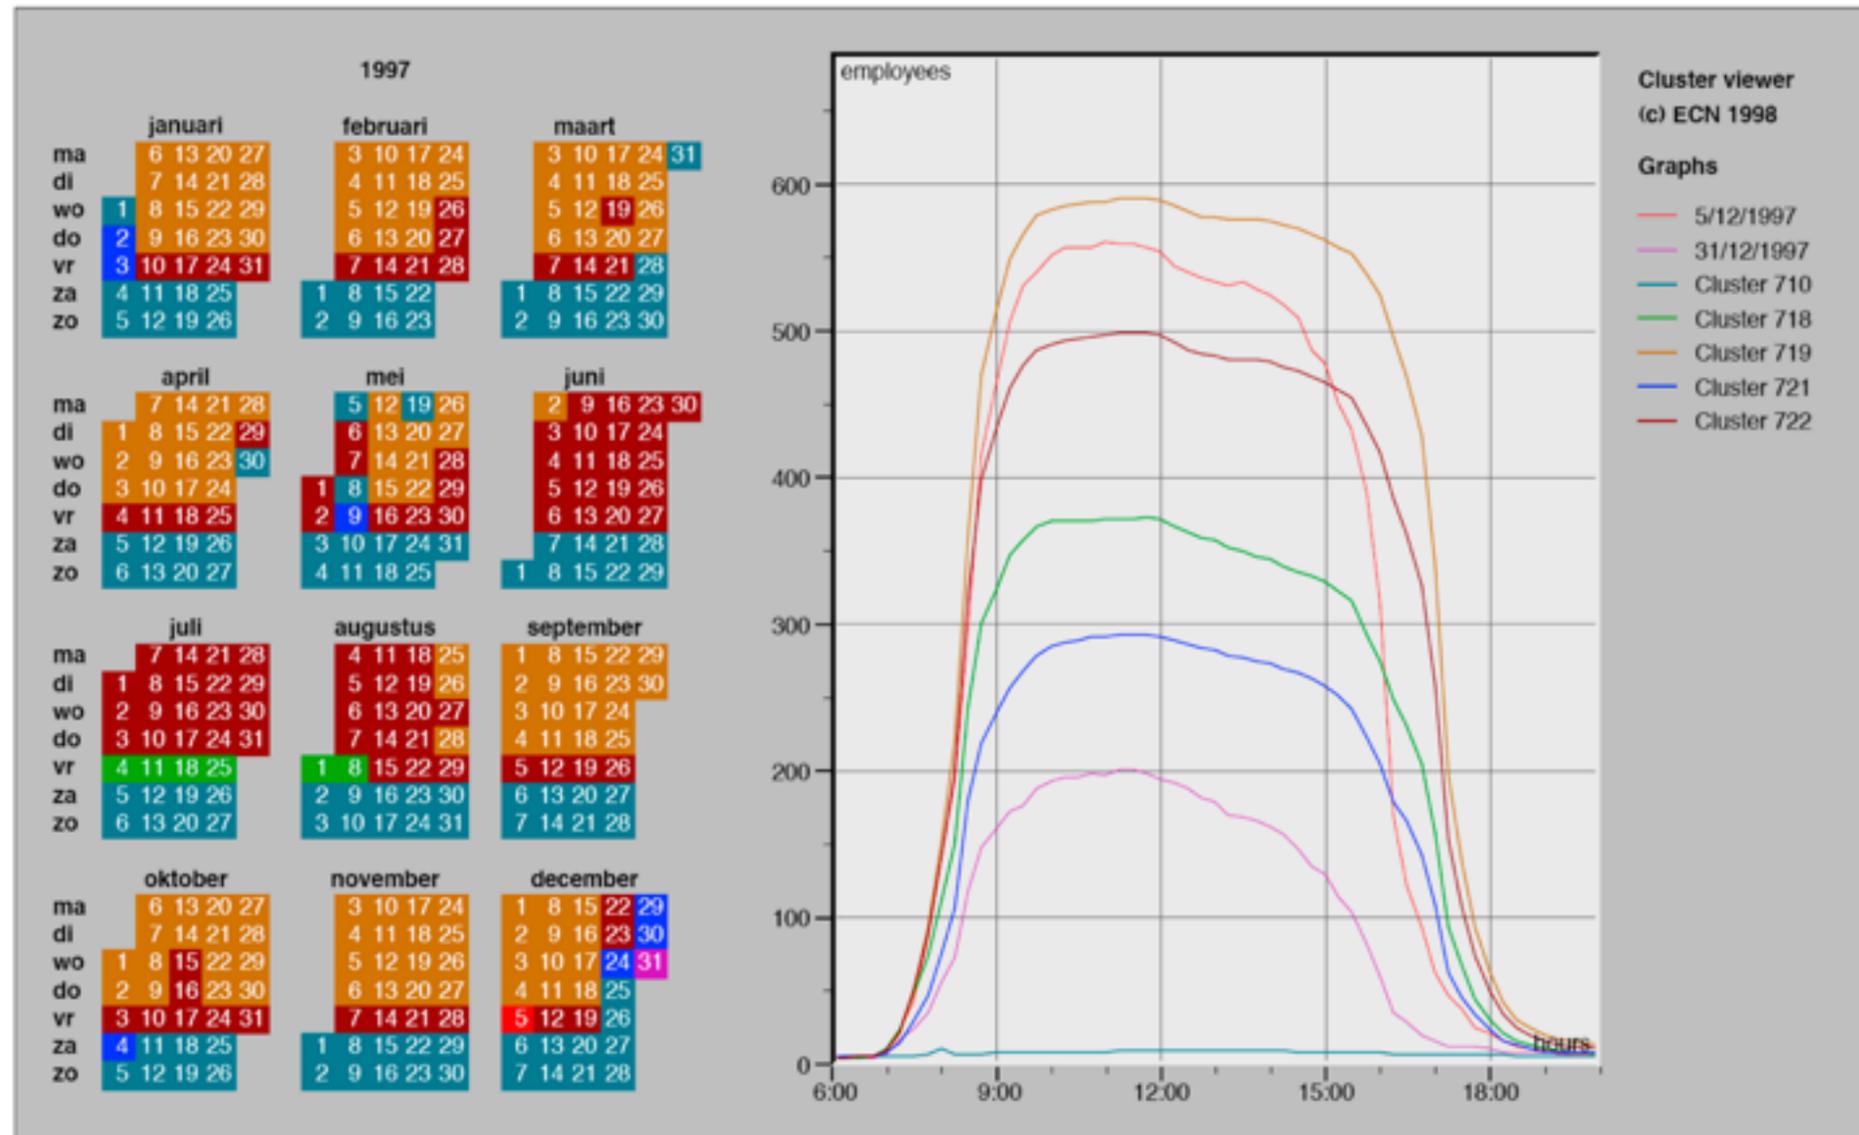

[Cluster and Calendar based Visualization of Time Series Data. van Wijk and van Selow, Proc. InfoVis 99.]



Justified 3D: shape perception

- benefits outweigh costs when task is shape perception for 3D spatial data
 - interactive navigation supports synthesis across many viewpoints

 Targets


⊙ Spatial Data

→ Shape

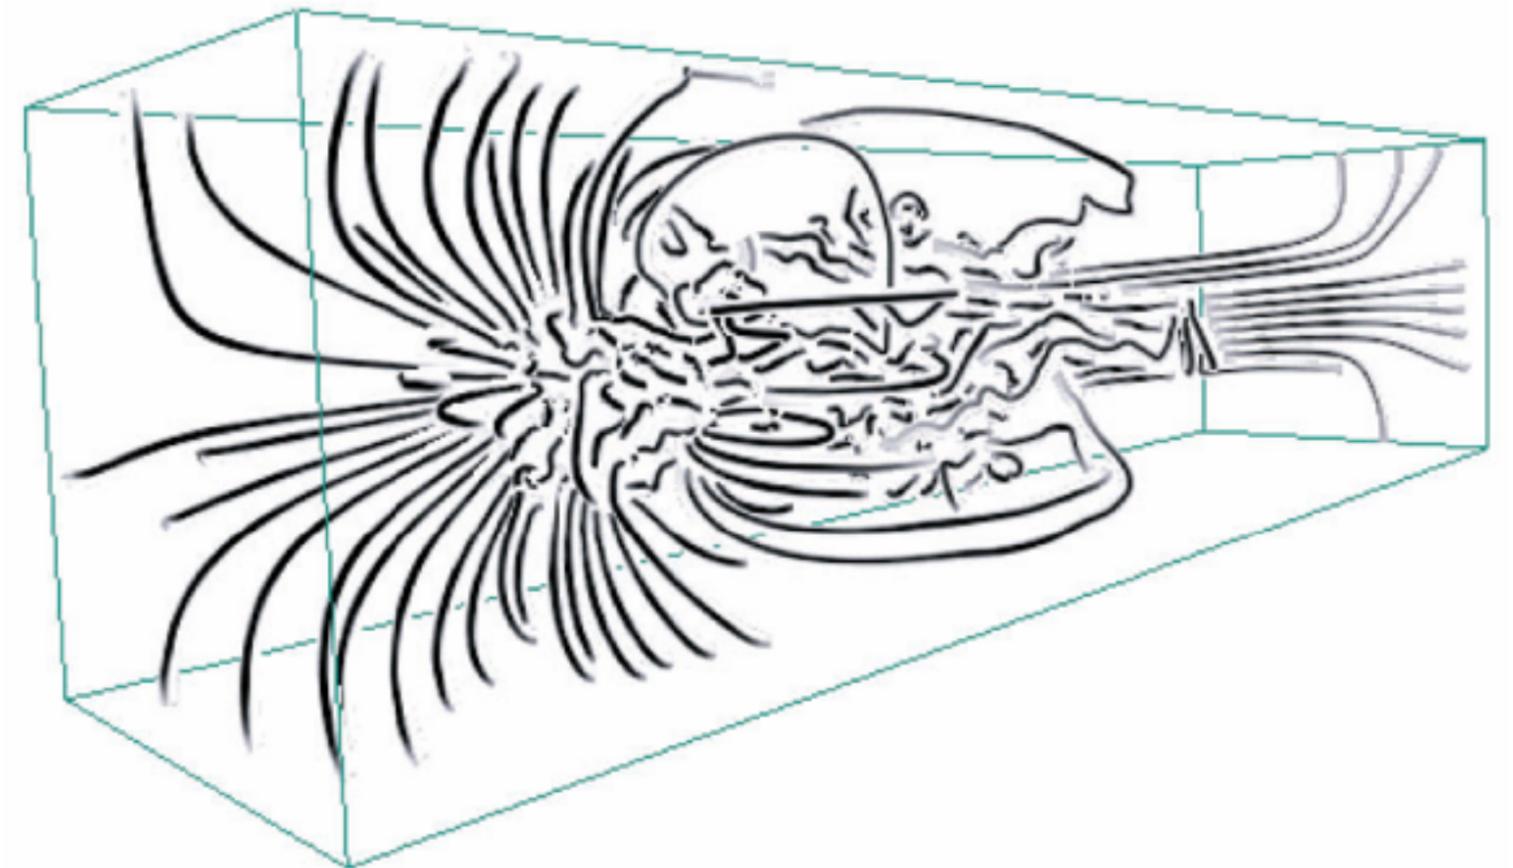

No unjustified 3D

- 3D legitimate for true 3D spatial data
- 3D needs very careful justification **for abstract data**
 - enthusiasm in 1990s, but now skepticism
 - be especially careful with 3D for point clouds or networks

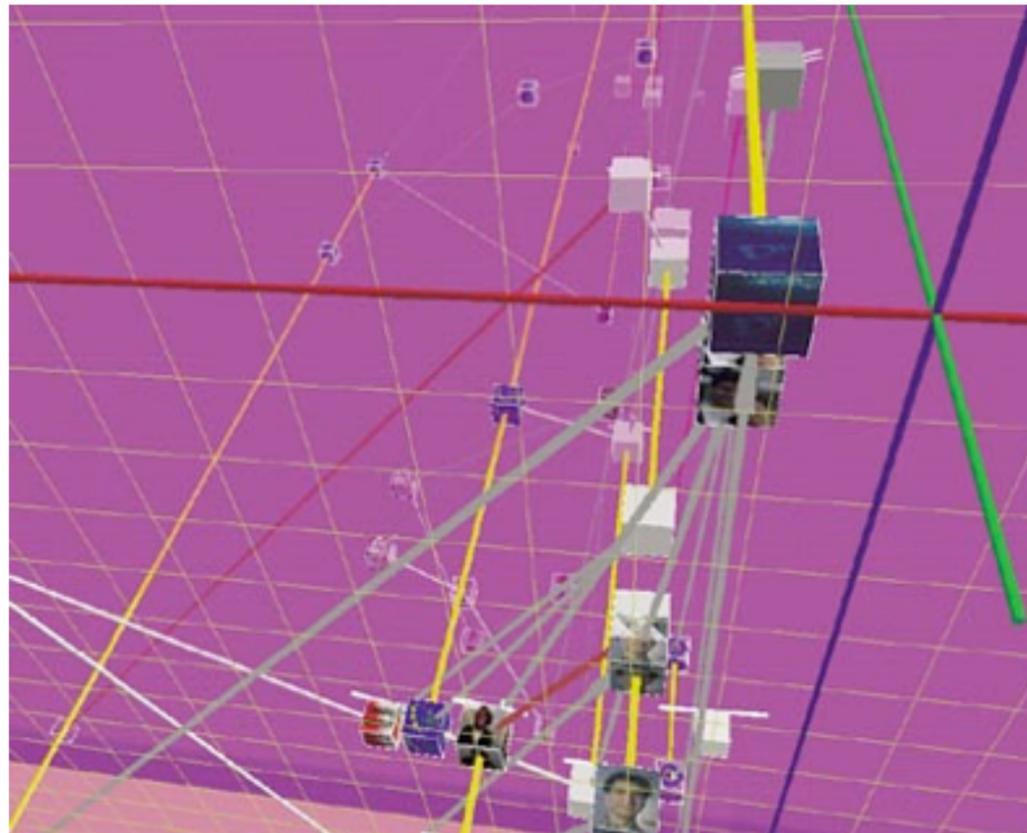

[WEBPATH-a three dimensional Web history. Frecon and Smith. Proc. InfoVis 1999]

No unjustified 2D

- consider whether network data requires 2D spatial layout
 - especially if reading text is central to task!
 - arranging as network means lower information density and harder label lookup compared to text lists
- benefits outweigh costs when topological structure/context important for task
 - be especially careful for search results, document collections, ontologies

Targets

➔ Network Data

➔ Topology



➔ Paths





Eyes beat memory

- principle: external cognition vs. internal memory
 - easy to compare by moving eyes between side-by-side views
 - harder to compare visible item to memory of what you saw
- implications for animation
 - great for choreographed storytelling
 - great for transitions between two states
 - poor for many states with changes everywhere
 - consider small multiples instead




Eyes beat memory example: Cerebral

- small multiples: one graph instance per experimental condition
 - same spatial layout
 - color differently, by condition

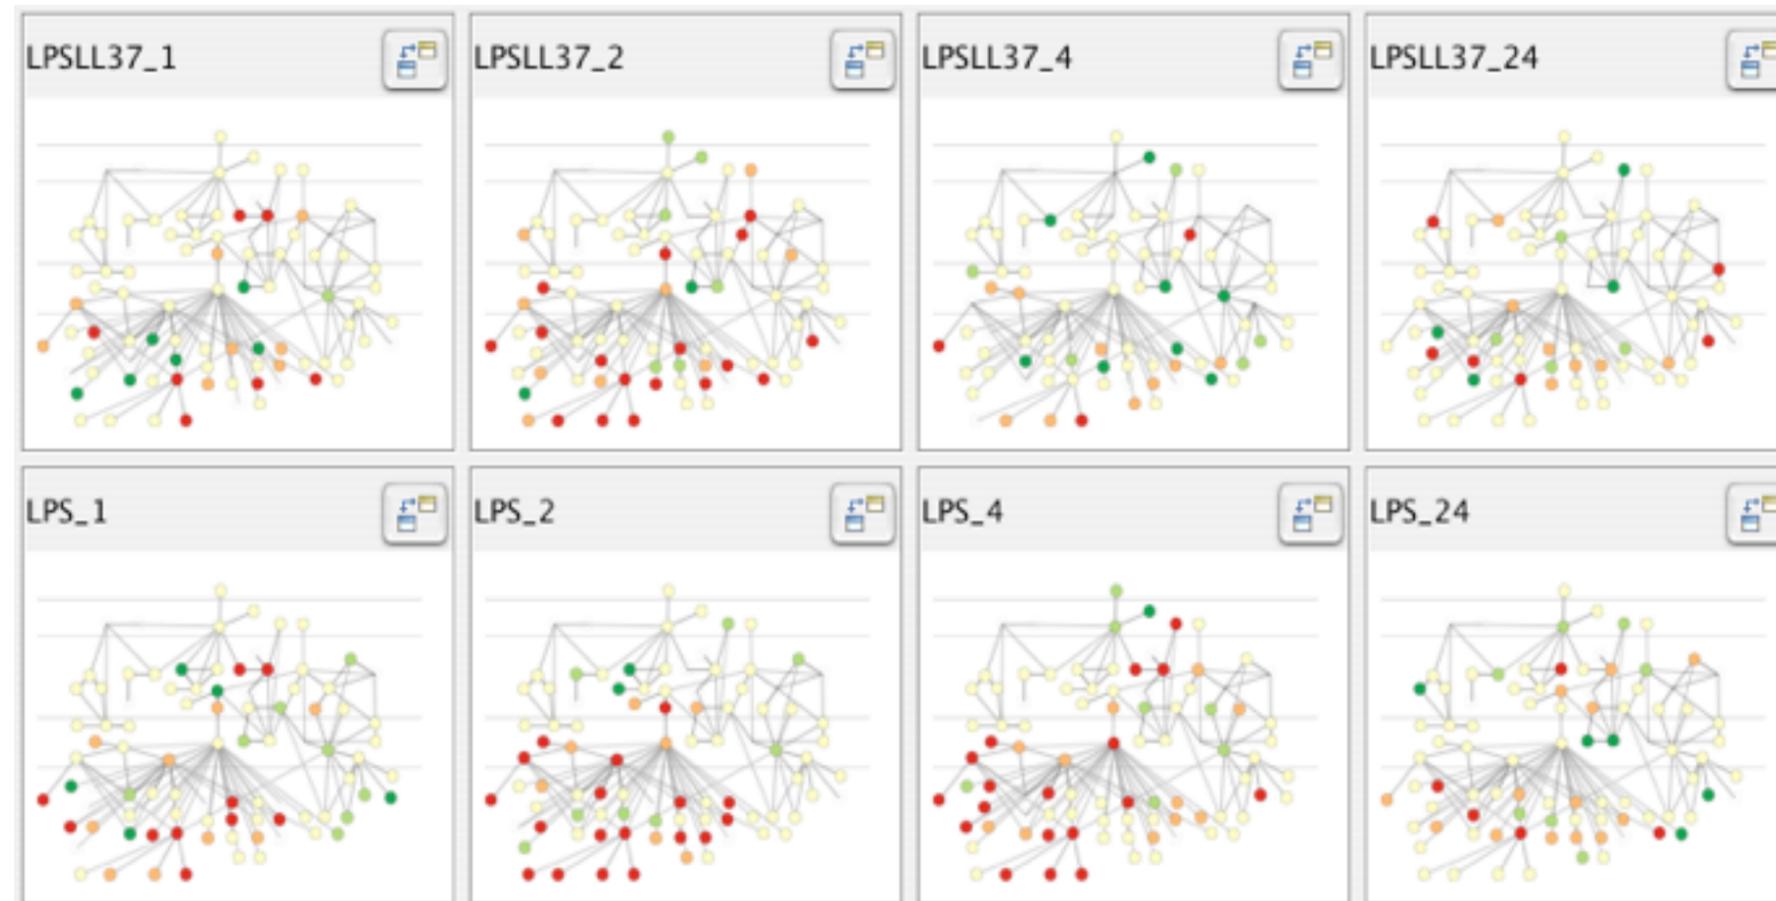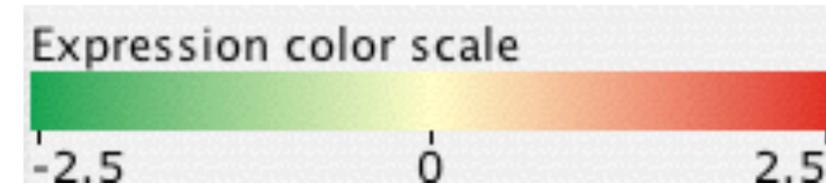

Why not animation?

- disparate frames and regions: comparison difficult
 - vs contiguous frames
 - vs small region
 - vs coherent motion of group
- safe special case
 - animated transitions


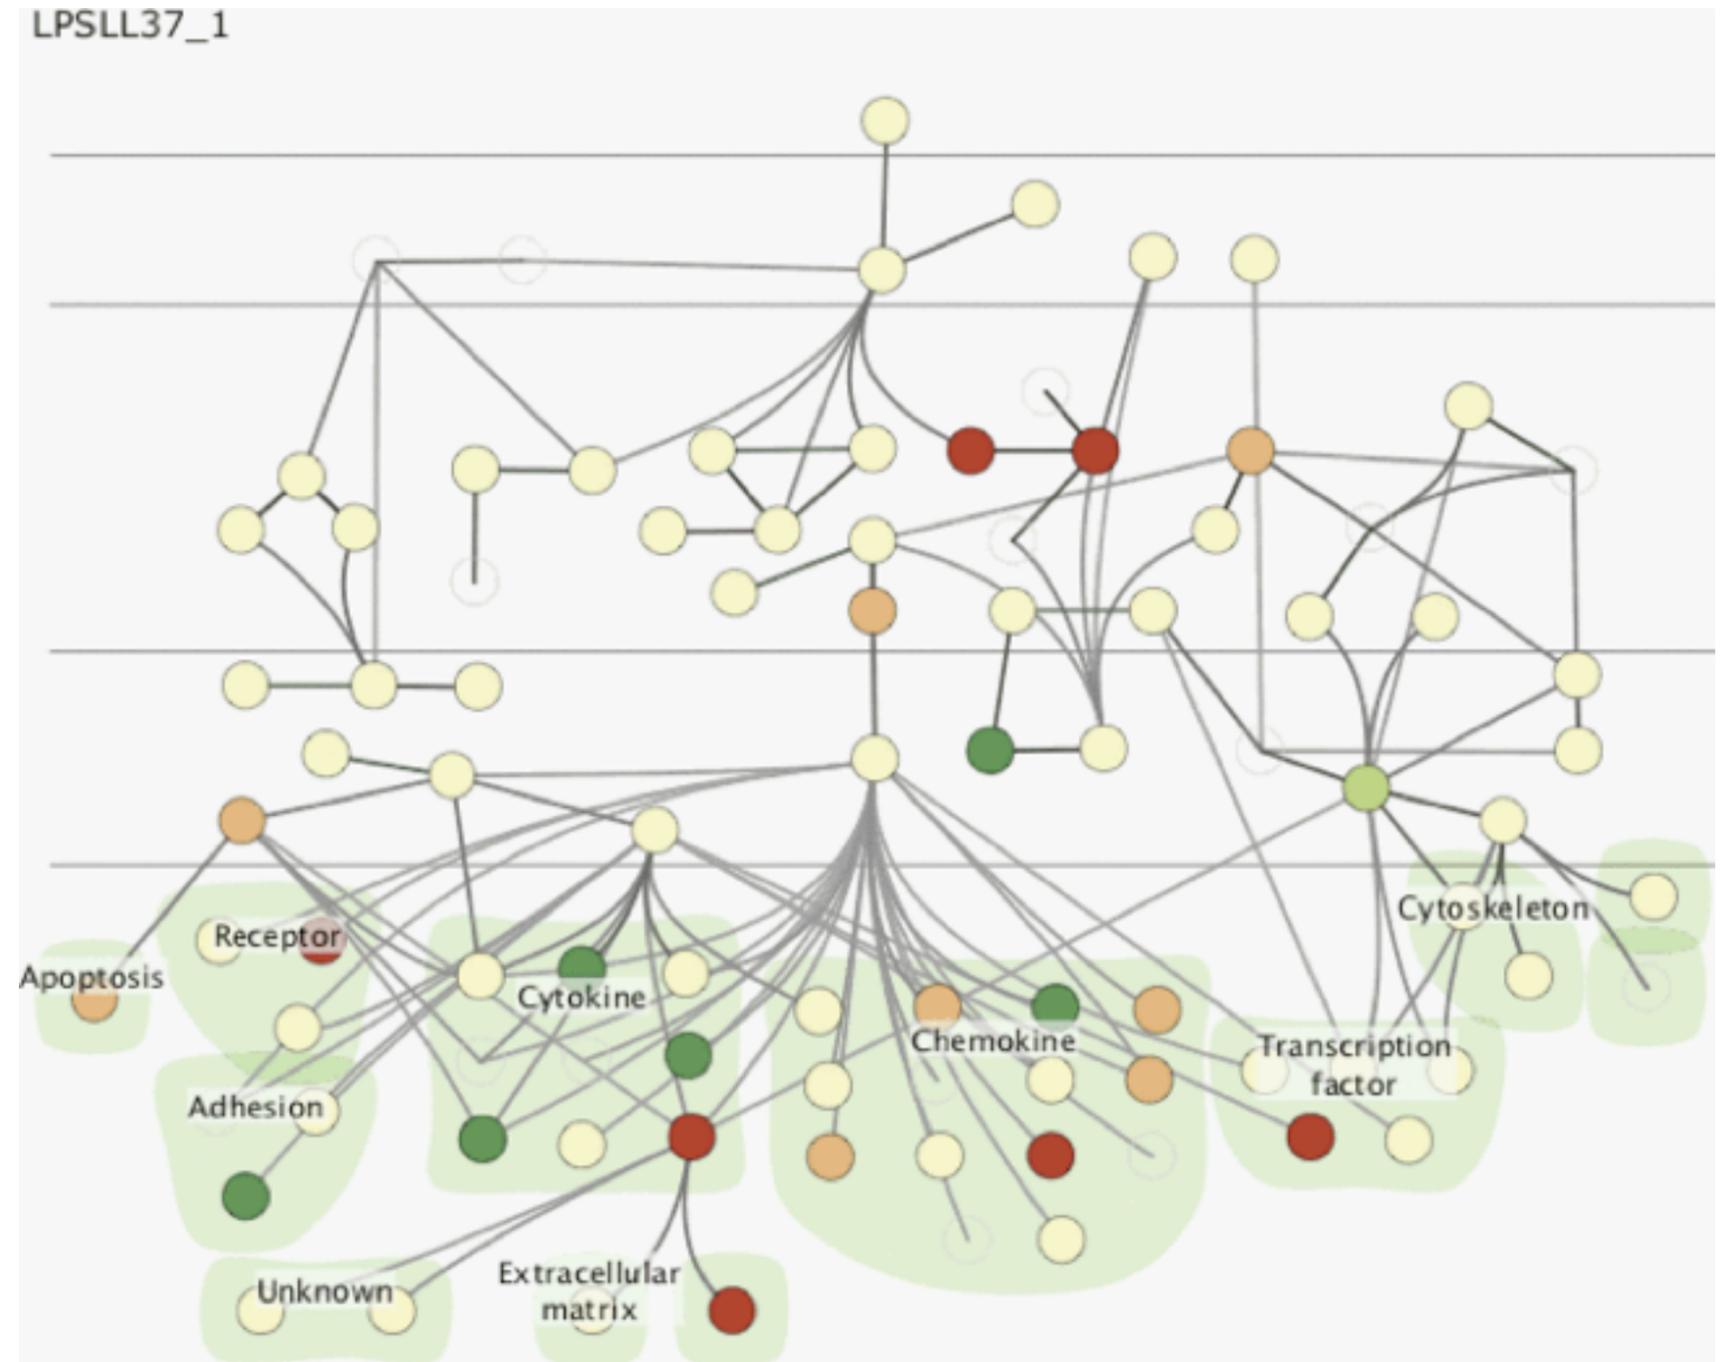


Change blindness

- if attention is directed elsewhere, even drastic changes not noticeable
 - door experiment
- change blindness demos
 - mask in between images

Resolution beats immersion

- immersion typically not helpful **for abstract data**
 - do not need sense of presence or stereoscopic 3D
- resolution much more important
 - pixels are the scarcest resource
 - desktop also better for workflow integration
- virtual reality for abstract data very difficult to justify

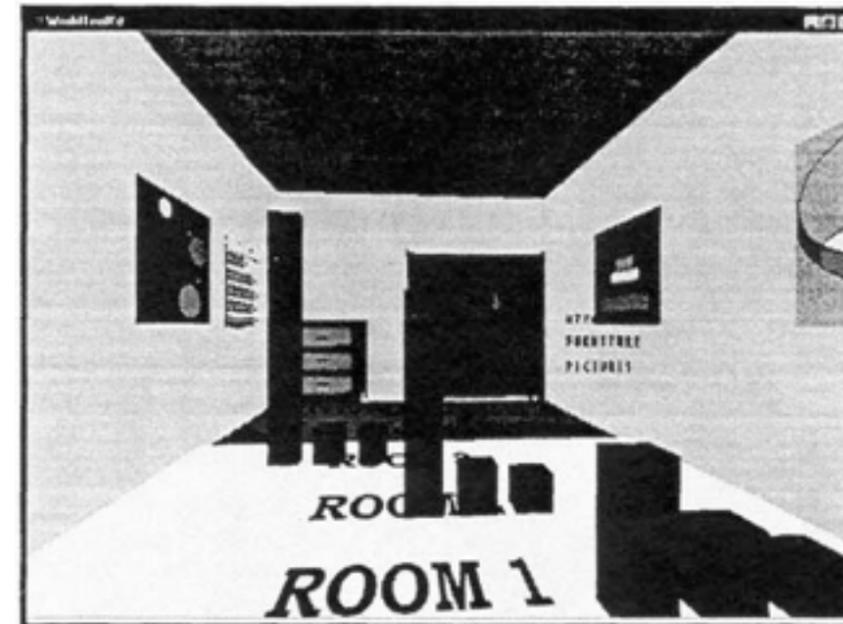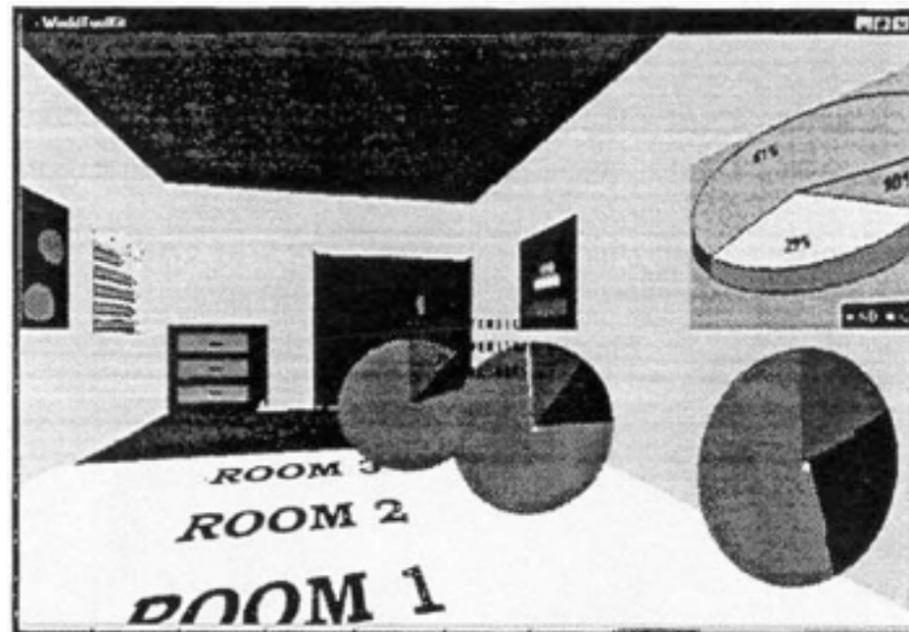

[Development of an information visualization tool using virtual reality. Kirner and Martins. Proc. Symp. Applied Computing 2000]

Overview first, zoom and filter, details on demand


- influential mantra from Shneiderman

[The Eyes Have It: A Task by Data Type Taxonomy for Information Visualizations. Shneiderman. Proc. IEEE Visual Languages, pp. 336–343, 1996.]


- **overview = summary**
 - microcosm of full vis design problem

→ Query

→ Identify



→ Compare

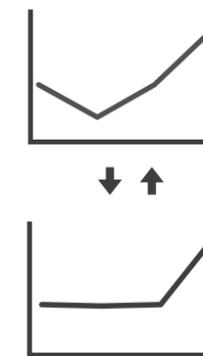

→ Summarise



Responsiveness is required

- three major categories
 - 0.1 seconds: perceptual processing
 - 1 second: immediate response
 - 10 seconds: brief tasks
- importance of visual feedback

Function first, form next

- start with focus on functionality
 - straightforward to improve aesthetics later on, as refinement
 - if no expertise in-house, find good graphic designer to work with
- dangerous to start with aesthetics
 - usually impossible to add function retroactively

Further reading

- Visualization Analysis and Design. Tamara Munzner. CRC Press, 2014.
– *Chap 6: Rules of Thumb*
- Designing with the Mind in Mind: Simple Guide to Understanding User Interface Design Rules. Jeff Johnson. Morgan Kaufmann, 2010.
– *Chap 12: We Have Time Requirements*

More Information

[@tamaramunzner](https://twitter.com/tamaramunzner)

- this talk

<http://www.cs.ubc.ca/~tmm/talks.html#vad16act>

- book page (including tutorial lecture slides)

<http://www.cs.ubc.ca/~tmm/vadbook>

– 20% promo code for book+ebook combo:
HVN17


– <http://www.crcpress.com/product/isbn/9781466508910>

– illustrations: Eamonn Maguire

- papers, videos, software, talks, courses

<http://www.cs.ubc.ca/group/infovis>

<http://www.cs.ubc.ca/~tmm>

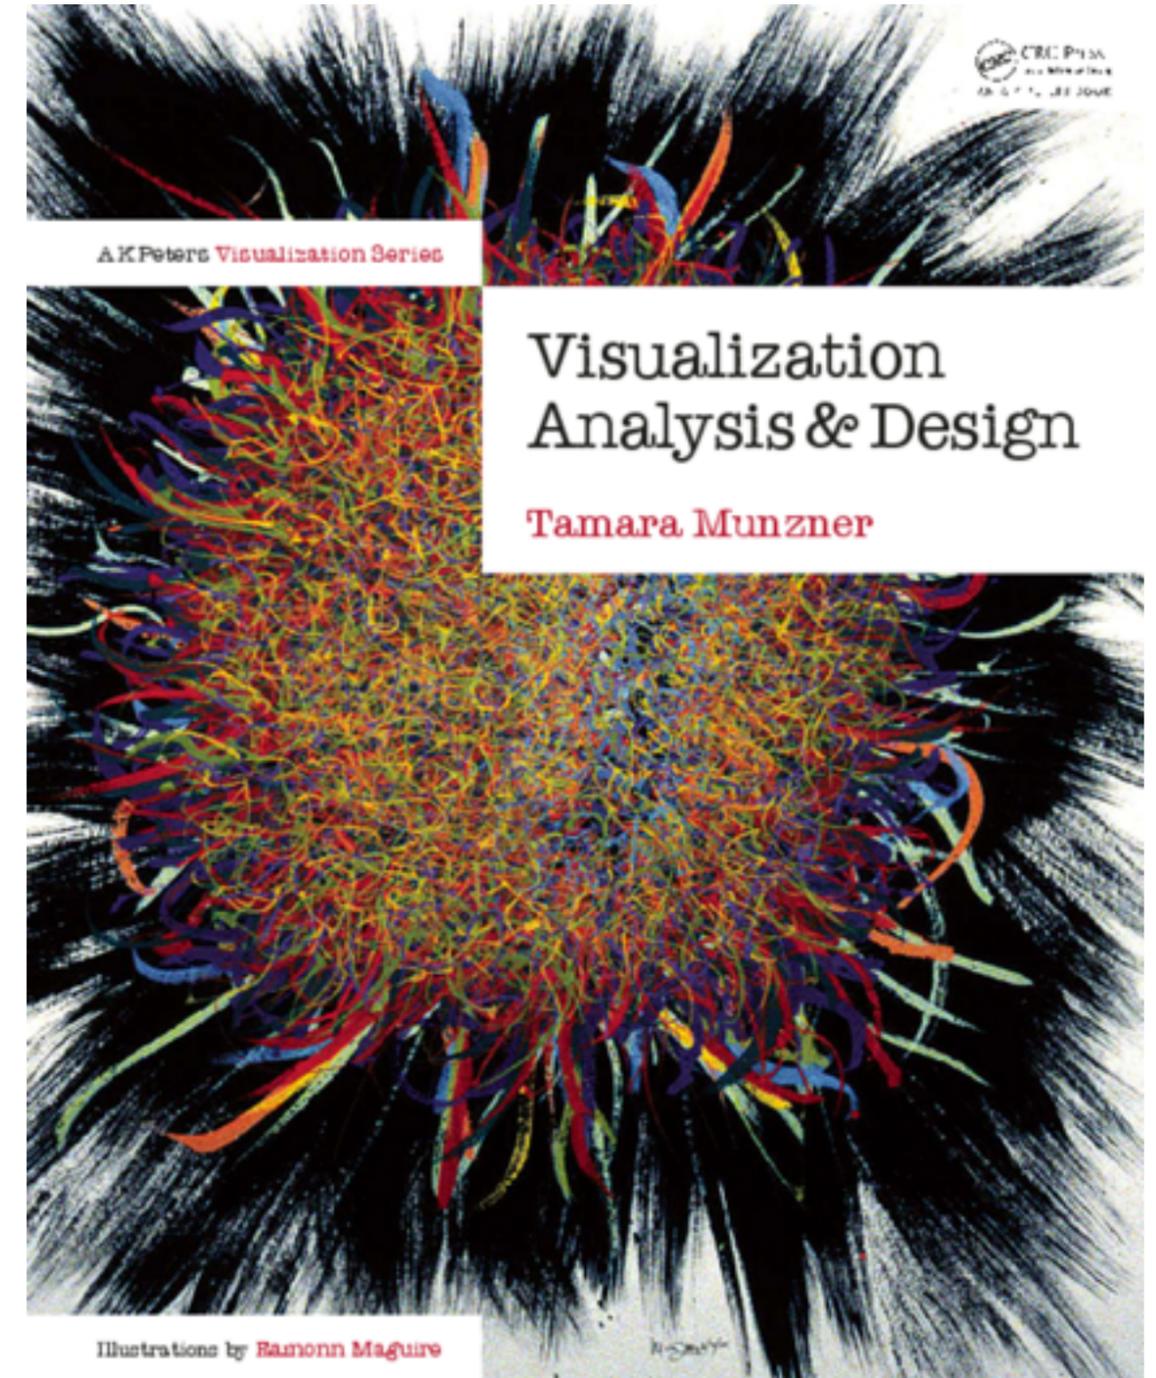

Visualization Analysis and Design.
Munzner. A K Peters Visualization Series, CRC Press, Visualization Series, 2014.